


Surface Mount

Voltage Controlled Oscillator

Linear Tuning 1160 to 2160 MHz



ROS-2160W



CASE STYLE: CK605

Features

- wideband, 1160-2160 MHz
- low phase noise, -97 dBc/Hz at 10 KHz offset

Applications

- PCN
- GPS

Electrical Specifications

FREQ. (MHz)	POWER OUTPUT (dBm)	TUNING VOLTAGE		PHASE NOISE dBc/Hz SSB at offset frequencies: Typ.				PULLING pk-pk @ 12 dB (MHz)	PUSHING (MHz/V) Typ.	TUNING SENSI- TIVITY (MHz/V) Typ.	HARMONICS* (dBc)		3 dB MODULATION BANDWIDTH (kHz) Typ.	POWER SUPPLY		PRICE \$
		Min.	Max.	1 kHz	10 kHz	100 kHz	1 MHz				Typ.	Max.		Voltage (V)	Current (mA) Max.	
1160-2160	5	0.5	20	-70	-97	-117	-137	10	1.5	30-80	-11	—	12000	10	30	24.95

* specified to 4th harmonic

Maximum Ratings


Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	+12V
Absolute Max. Tuning Voltage (Vtune)	+22V

All specifications: 50 ohm system

Pin Connections

PORT	kg
RF OUT	10
V-CC	14
V-TUNE	2
GND EXT.	all others

Outline drawing

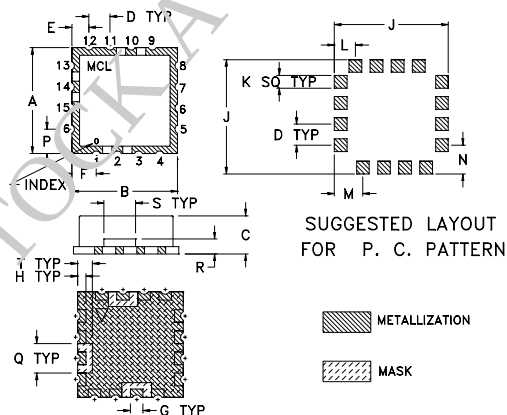

Outline dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	
.500 (12.70)	.500 (12.70)	.180 (4.57)	.100 (2.54)	.080 (2.03)	.115 (2.92)	.060 (1.52)	.040 (1.02)	.540 (13.72)	
K	L	M	N	P	Q	R	S	T	WT GRAMS
.060 (1.52)	.100 (2.54)	.135 (3.45)	.135 (3.45)	.115 (2.92)	.140 (3.56)	.070 (1.78)	.150 (3.81)	.070 (1.78)	1



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers/ NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-835094 • Fax 44-1252-837010

ISO 9001 CERTIFIED

REV. OR
M71519
ED-8067B/1
ROS-2160W
WD/TD/CP
000417