




CRYSTAL OSCILLATORS HCMOS/TTL 3.3V

SURFACE MOUNT
R models
R1310, R1312
R3310, R3312



5 x 7mm Surface Mount Industrial: -40°C to +85°C FIXED/TRISTATE, 1 MHz to 125 MHz

FEATURES

- Industrial operating temperature range from -40° to +85°C accomodates rugged environments
- Low jitter of 6 ps rms max ensures stable data transmission
- Stability options of ± 100 ppm and ± 50 ppm
- 45/55 symmetry is standard
- Guaranteed start-up with ramping DC Supply
- Start up time less than 5 ms
- Tristate option available
- Very low power when tristated

TYPICAL APPLICATIONS


- Telecom and data networking applications that require low jitter and are subjected to rugged environmental conditions, including:
 - DSL
 - Gigabit ethernet
 - Fibre Channel
 - VoIP

Description

MF Electronics R-Series industrial temperature range surface mount (SMD) oscillators provide clock waveforms needed to clock standard HCMOS or TTL circuits in PCBs mounted in rugged environments.


CONNECTIONS

	Fixed Output Models	Tristate Models
PAD 1	NOT USED	Floating or 1 : Oscillator runs Ground or 0 : Disable or Tristate
PAD 2	Ground and Case	
PAD 3	Output	
PAD 4	+3.3V, V_{DD}	

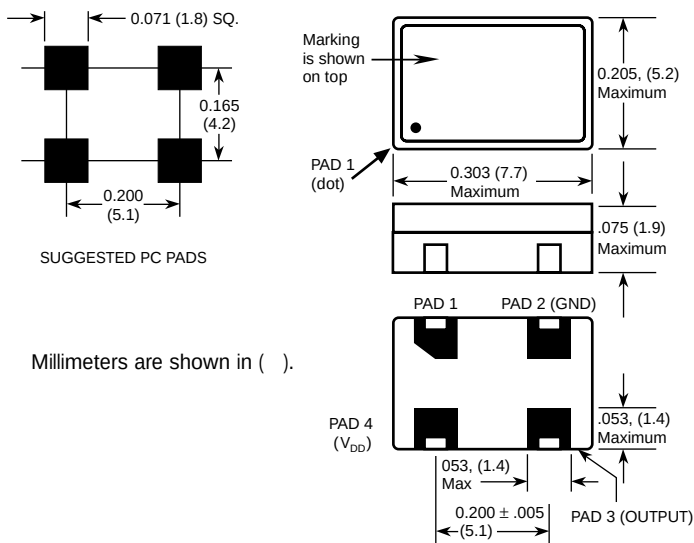

"R" Package

Millimeters are shown in ().

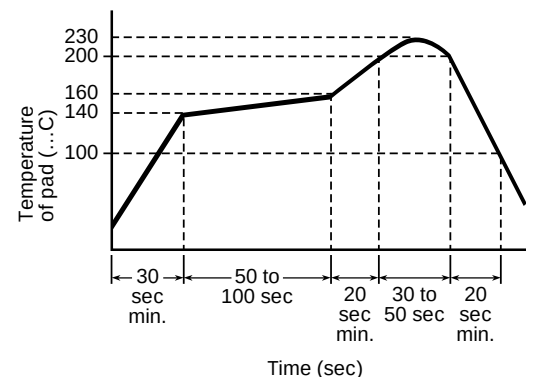

Recommended Reflow Soldering Profile





CRYSTAL OSCILLATORS
 HCMOS/TTL 3.3V
Surface Mount
Industrial: -40° TO +85°C
FIXED/TRISTATE, 1 MHz to 125 MHz

SURFACE MOUNT
R models
 R1310, R1312
 R3310, R3312

ELECTRICAL SPECIFICATIONS

Frequency Range 1 MHz to 125 MHz

Frequency Stability Includes calibration at 25°C, operating temperature, change of input voltage, change of load, shock and vibration.

	MIN	TYP	MAX	UNITS
Input Voltage, V_{DD}	3.0	3.3	3.6	volts
Input Current				
3 M to 10 MHz		3.0	4.5	ma
10.1 to 20 MHz		5.0	6.0	ma
20.1 to 30 MHz		10.0	15.0	ma
30.1 to 50 MHz		35.0	40.0	ma
50.1 to 67 MHz		40.0	50.0	ma
67.1 to 125 MHz		60.0	70.0	ma

Output Levels

"0" Level, sinking 16 ma		0.4	volts
"1" Level CMOS, sourcing 8 ma	$V_{DD} - .4$		volts

Rise and Fall Times

CMOS, 15 pf, 20 to 80% (<60 MHz)	3.0	4	ns
CMOS, 30 pf, 20 to 80% (<60 MHz)	4.0	5	ns
CMOS, 50 pf, 20 to 80% (<60 MHz)	6.0	8	ns
CMOS, 15 pf, 20 to 80% (>60 MHz)	2.0	2.5	ns
CMOS, 30 pf, 20 to 80% (>60 MHz)	3.0	4.5	ns

Jitter 6 ps RMS


Symmetry
 CMOS, @ 50% V_{DD} 48/52 45/55 percent

Aging

First year	3	ppm
After first year	1	ppm/yr

Input Requirements for Pin 1.:

- "1": On – Pin 1 may float or 2.4V min., sourcing 400 microAmp
- "0": Disable or Tristate – Pin 1 requires 0.4V, sinking 400 microAmp




WAVEFORMS

TRISTATE		FIXED OUTPUT		Frequency Stability
Model	Marking Letter ID*	Model	Marking Letter ID*	
R3310	GQ	R1310	GM	±100 ppm
R3312	GR	R1312	GN	±50 ppm

* See Marking Specification

MARKING SPECIFICATION

The format for the marking is:





CRYSTAL OSCILLATORS
HCMOS/TTL 3.3V
Surface Mount
Industrial: -40° TO +85°C
FIXED/TRISTATE, 1 MHz to 125 MHz

SURFACE MOUNT
R models
R1310, R1312
R3310, R3312

ENVIRONMENTAL SPECIFICATIONS

Temperature

Operating -40° to +85°C
Storage -55° to +125°C

Temperature Cycle – Not to exceed ± 5 ppm change when exposed to 2 hours maximum at each temperature from 0 to 120°C, with 25°C reference

Shock – 1000 Gs, 0.35 ms, 1/2 sine wave, 3 shocks in each plane

Vibration – 10-2000 Hz of .06" d.a. or 20 Gs, whichever is less

Humidity – Resistant to 85° R.H. at 85°C

MECHANICAL SPECIFICATIONS

Gross Leak – Each unit checked in 125°C fluoro-carbon


Fine Leak – Mass spectrometer leak rate less than 5×10^{-8} atoms, cc/sec of helium

Case – Ceramic

Pads – 60 microinch of gold over nickel

Marking – Print is permanent black ink or laser engraved

Resistance to Solvents – MIL STD 202, Method 215

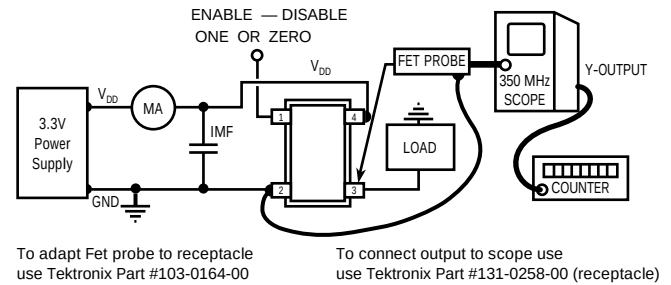

TEST CIRCUIT

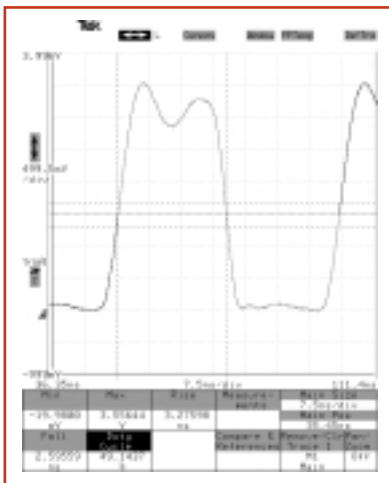


Fig.1 R3392-20M with 25pf load

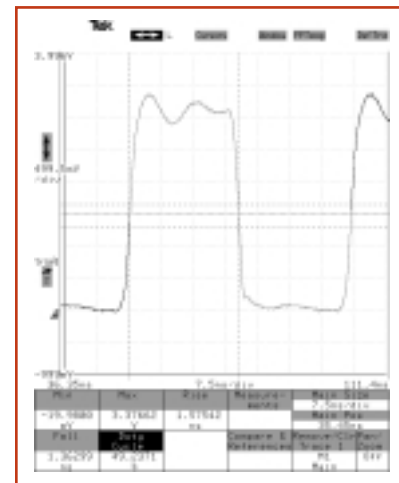


Fig. 2 R3392-20M without load

HOW TO ORDER

For Part Number, put package type before model number, and add frequency in MHz, for example:

R 3312 - 50M

R is SMD model "3312" is model type "50 M" frequency

Unless customer-specific terms and conditions are signed by an officer of MF Electronics, the sale of this and all MF Electronics products are subject to terms and conditions set forth at www.mfelectronics.com/terms

SS#	Rev.
R1310	A

MF ELECTRONICS