

IrDA Infrared Communication Module

RPM882-H7


● Features

- Bilateral symmetrical and wide angle of optical characteristics both for IrDA and for RC mode.
- Typical 9m for Remote control
- IrDA Ver 1.2 Low Power(2.4kbps to 115.2kbps)
- Low voltage operation ($V_{CC}=2.4$ to $3.6V$, $V_{IO}=1.5$ to $3.6V$)
- Flexible Application for Transfer input
Separate input / Common input

● Applications

- Mobile Phone, PDA etc.

● External Dimensions (Unit:mm)

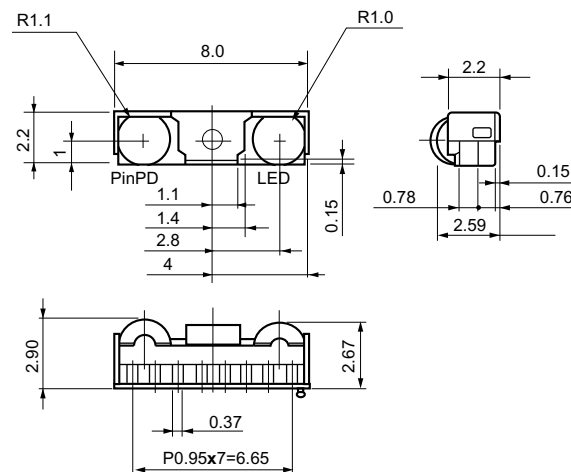

● Absolute maximum ratings ($T_a=25^{\circ}C$)

Parameter	Symbol	Limits	Units
Supply Voltage	V_{max}	7.0 *1	V
Input Voltage	$V_{in}(4,5,6,7pin)$	-0.3~ $V_{IO}+0.3$	V
Operation Temperature	T_{opr}	-25~85	$^{\circ}C$
Storage Temperature	T_{stg}	-30~100	$^{\circ}C$
LED Peak Current	I_{fp}	300 *2	mA
Power Dissipation	P_d	300 *3	mW

*1 This applies to all pins basis ground pins (1pin)

*2 LED Peak Current: <90usec, On duty<50%

*3 When glass-epoxy board (70 x 70 x 1.6mm) mounted. In case operating environment is over $25^{\circ}C$, 4mW would be reduced per each $1^{\circ}C$ stepping up.

● Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Units
Supply Voltage	VCC	2.4	3.0	3.6	V
Interface Supply Voltage	VIO	1.5	3.0	VCC	V
LED Supply Voltage	LEDVCC	2.6	3.0	5.5	V

● Electrical characteristics ($V_{CC}=V_{IO}=3.0V$, $LEDVCC=3.0V$, $T_a=25^{\circ}C$)

Parameter	Symbol	Min.	Typ.	Max.	Units	Condition
Consumption Current 1	I_{cc1}	—	80	104	μA	PWDOWN=0V, At no input light
Consumption Current 2	I_{cc2}	—	0.01	0.2	μA	PWDOWN=VIO, At no input light
LED Anode Current (IrDA Mode)	I_{LEDA1}	28	40	52	mA	TXD=VIO, $R_1=4.7\Omega$, PWDOWN=0V
LED Anode Current (RC Mode)	I_{LEDA2}	150	200	245	mA	TX-RC=VIO, $R_1=4.7\Omega$, PWDOWN=0V
RXD Output Pulse Width	tw_{RXD}	1.5	2.3	4.2	μs	$C_L=15pF$, 2.4~115.2kbps

The products listed in this catalog are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys). Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

ROHM CO., LTD.

21, Saini Mizosaki-cho, Ukyo-ku, Kyoto 615-8585, Japan
TEL:(075)311-2121 FAX:(075)315-0172
URL <http://www.rohm.com>

- ROHM assumes no responsibility for the use of any circuits described herein, conveys no license under any patent or other right, and makes no representations that the circuits are free from patent infringement.
- Specifications subject to change without notice for the purpose of improvement.


- Current specifications in effect of

Oct. 2003

● Optical Characteristics (VCC=VIO=3.0V,LEDVCC=3.0V,Ta=25°C)


Parameter	Symbol	Min.	Typ.	Max.	Units	Condition
Peak Wave Length 1(IrDA Mode)	$\lambda P1$	880	890	892	nm	ILED=50mA,Duty20%
		850	-	900	nm	ILED=50mA,Duty20%,-20~60°C
Peak Wave Length 2(RC Mode)	$\lambda P2$	880	890	920	nm	ILED=200mA,Duty20%
Intensity 1(IrDA Mode)	IE1	4	13	28	mW/sr	-15deg $\leq \theta_L \leq$ 15deg,R1=4.7 Ω
Intensity 1(RC Mode)	IE2	30	65	130	mW/sr	-15deg $\leq \theta_L \leq$ 15deg,R1=4.7 Ω
Half-Angle	$\theta L/2$	± 15	± 22	-	deg	
Minimum Irradiance in Angular	Eemin	-	3.6	6.8	$\mu W/cm^2$	-15deg $\leq \theta_L \leq$ 15deg
Maximum Irradiance in Angular	Eemax	500	-	-	mW/cm ²	-15deg $\leq \theta_L \leq$ 15deg
INPUT Half-Angular	$\theta D/2$	± 15	-	-	deg	
Maximum Emitting Time	TLEDmax	20.5	48	120	μs	TXD=0 $\rightarrow$ VIO or TX-RC=0 $\rightarrow$ VIO

● Block Diagram

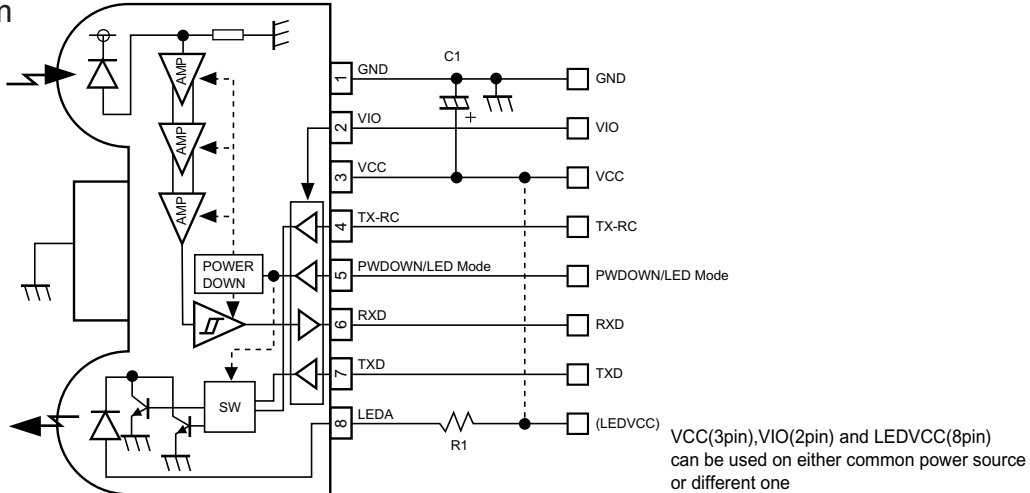


● Interface operating timing (Emitting Side)

(1) When TXD output for IrDA and TXD output for remote controller is 1 line

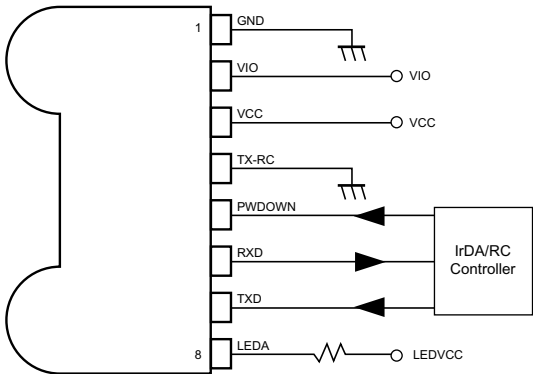

Input		Condition	
PWDOWN	TXD	LED Mode	Receiver Circuit
L	L	OFF	ON
L		IrDA	ON
H	L	OFF	OFF
H		RC	OFF

(2) When TXD output for IrDA and TXD output for remote controller are different lines

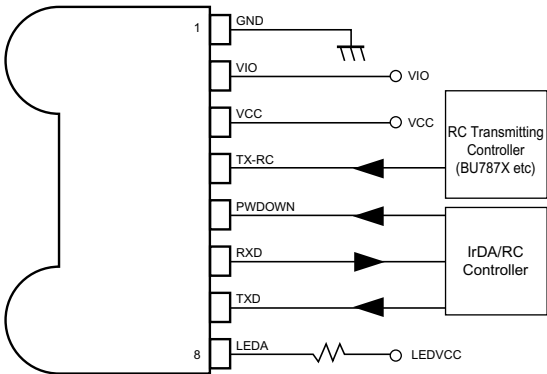

(2) RC transmitting mode at IDA receiver active condition

Input			Condition	
PWDOWN	TX-RC	TXD	LED Mode	Receiver Circuit
L	L	L	OFF	ON
L	L		IrDA	ON
H		L	RC	OFF
H	L	L	OFF	OFF

Contact us for further information about the products.

Atlanta U.S.A. / ROHM ELECTRONICS EASTERN SALES DIVISION
(DIVISION OF ROHM ELE.U.S.A.,LLC)
TEL: +1(770)754-5972 FAX: +1(770)754-0691

Dallas U.S.A. / ROHM ELECTRONICS CENTRAL SALES DIVISION
(DIVISION OF ROHM ELE.U.S.A.,LLC)
TEL: +1(972)312-8818 FAX: +1(972)312-0330

San Diego U.S.A. / ROHM ELECTRONICS WESTERN SALES DIVISION
(DIVISION OF ROHM ELE.U.S.A.,LLC)
TEL: +1(858)625-3630 FAX: +1(858)625-3670

Germany / ROHM ELECTRONICS GERMANY SALES DIVISION
(DIVISION OF ROHM ELECTRONICS GMBH)
TEL: +49(2154)9210 FAX: +49(2154)921400

United Kingdom / ROHM ELECTRONICS UK SALES DIVISION
(DIVISION OF ROHM ELECTRONICS GMBH)
TEL: +44(1)908-282-666 FAX: +44(1)908-282-528

France / ROHM ELECTRONICS FRANCE SALES DIVISION
(DIVISION OF ROHM ELECTRONICS GMBH)
TEL: +33(1)41 23 14 00 FAX: +33(1)41 23 14 30

Hong Kong China / ROHM ELECTRONICS (H.K.) CO., LTD.
TEL: +852(2)7406262 FAX: +852(2)3758971

Shanghai China / ROHM ELECTRONICS (SHANGHAI) CO., LTD.
TEL: +86(21)6279-2727 FAX: +86(21)6247-2066

Dalian China / ROHM ELECTRONICS TRADING (DALIAN) CO., LTD.
TEL: +86(41)1230-8549 FAX: +86(41)1230-8537

Beijing China / BEIJING REPRESENTATIVE OFFICE
TEL: +86(10)8451-2426 FAX: +86(10)6460-9518

Taiwan / ROHM ELECTRONICS TAIWAN CO., LTD.
TEL: +886(2)2500-6956 FAX: +886(2)2503-2869

Korea / ROHM ELECTRONICS KOREA CORPORATION
TEL: +82(2)8182-700 FAX: +82(2)8182-715

Singapore / ROHM ELECTRONICS ASIA PTE.LTD. (RES/REI)
TEL: +65-332-2322 FAX: +65-332-5662

Malaysia / ROHM ELECTRONICS (MALAYSIA) SDN. BHD.
TEL: +60(3)7958-8355 FAX: +60(3)7958-8377

Philippines / ROHM ELECTRONICS (PHILIPPINES) SALES CORPORATION
TEL: +63(2)807-6872 FAX: +63(2)809-1422

Thailand / ROHM ELECTRONICS (THAILAND) CO., LTD.
TEL: +66(2)254-4890 FAX: +66(2)256-6334