

Switching (30V, 12.5A)

RSS125N03

●Features

- 1) Low on-resistance.
- 2) Built-in G-S Protection Diode.
- 3) Small and Surface Mount Package (SOP8) .


●Application

Power switching, DC / DC converter.

●Structure

Silicon N-channel
MOS FET

●External dimensions (Unit : mm)

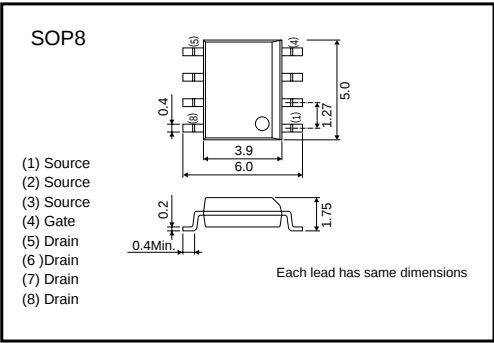

●Packaging specifications

Type	Package	Taping
	Code	TB
	Basic ordering unit (pieces)	2500
RSS125N03		○

●Absolute maximum ratings (Ta=25°C)

Parameter		Symbol	Limits	Unit
Drain-source voltage		V_{DS}	30	V
Gate-source voltage		V_{GS}	20	V
Drain current	Continuous	I_D	± 12.5	A
	Pulsed	I_{DP}	± 50	A *1
Source current (Body diode)	Continuous	I_S	1.6	A
	Pulsed	I_{SP}	6.4	A *1
Total power dissipation		P_D	2	W *2
Channel temperature		T_{ch}	150	°C
Storage temperature		T_{stg}	-55 to 150	°C


*1 $P_w \leq 10\mu s$, Duty cycle $\leq 1\%$
*2 Mounted on a ceramic board.

●Thermal resistance (Ta=25°C)

Parameter	Symbol	Limits	Unit
Channel to ambient	$R_{th(ch-a)}$	62.5	°C / W *

* Mounted on a ceramic board.

●Equivalent circuit

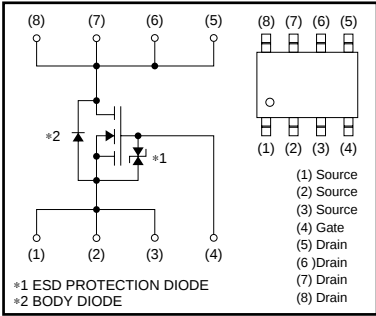

*A protection diode is included between the gate and the source terminals to protect the diode against static electricity when the product is in use. Use the protection circuit when the fixed voltages are exceeded.

Transistors

●Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Gate-source leakage	I_{GSS}	—	—	±10	μA	$V_{GS}=\pm 20V$, $V_{DS}=0V$
Drain-source breakdown voltage	$V_{(BR)DSS}$	30	—	—	V	$I_D=1mA$, $V_{GS}=0V$
Zero gate voltage drain current	I_{DSS}	—	—	1	μA	$V_{DS}=30V$, $V_{GS}=0V$
Gate threshold voltage	$V_{GS(th)}$	1.0	—	2.5	V	$V_{DS}=10V$, $I_D=1mA$
Static drain-source on-state resistance	$R_{DS(on)}$ *	—	6.5	8.9	mΩ	$I_D=12.5A$, $V_{GS}=10V$
		—	8.6	11.8		$I_D=12.5A$, $V_{GS}=4.5V$
		—	9.3	12.8		$I_D=12.5A$, $V_{GS}=4V$
Forward transfer admittance	$ Y_{fs} $ *	10	—	—	S	$I_D=12.5A$, $V_{DS}=10V$
Input capacitance	C_{iss}	—	1670	—	pF	$V_{DS}=10V$
Output capacitance	C_{oss}	—	470	—	pF	$V_{GS}=0V$
Reverse transfer capacitance	C_{rss}	—	270	—	pF	$f=1MHz$
Turn-on delay time	$t_{d(on)}$ *	—	10	—	ns	$I_D=6.25A$, $V_{DD}=\pm 15V$
Rise time	t_r *	—	17	—	ns	$V_{GS}=10V$
Turn-off delay time	$t_{d(off)}$ *	—	69	—	ns	$R_L=2.40\Omega$
Fall time	t_f *	—	30	—	ns	$R_{GS}=10\Omega$
Total gate charge	Q_g *	—	20	28	nC	$V_{DD}=15V$
Gate-source charge	Q_{gs} *	—	4.2	—	nC	$V_{GS}=5V$
Gate-drain charge	Q_{gd} *	—	8.0	—	nC	$I_D=12.5A$

*Pulsed

●Body diode characteristics (Source-Drain Characteristics) (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Forward voltage	V_{SD} *	—	—	1.2	V	$I_S=6.4A$, $V_{GS}=0V$

*Pulsed

Transistors

●Electrical characteristic curves

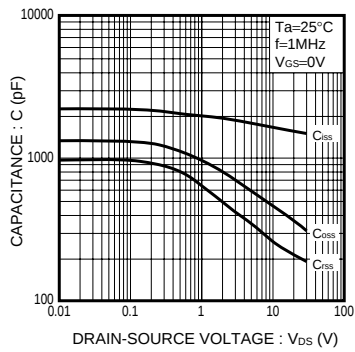


Fig.1 Typical Capacitance vs. Drain-Source Voltage

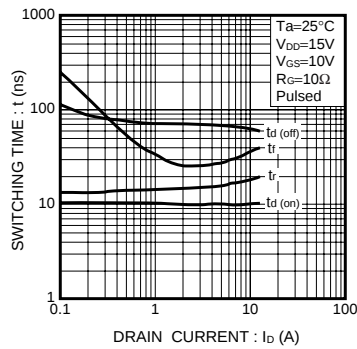


Fig.2 Switching Characteristics

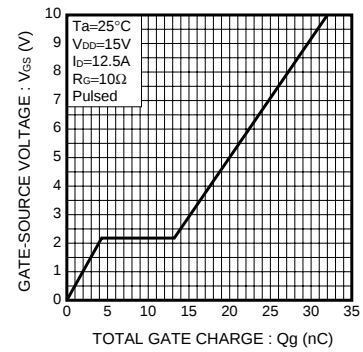


Fig.3 Dynamic Input Characteristics

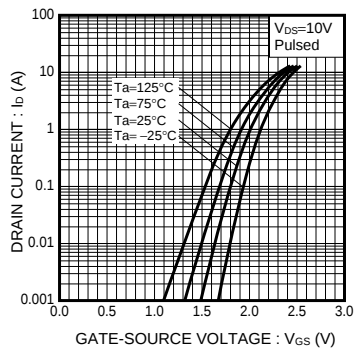


Fig.4 Typical Transfer Characteristics

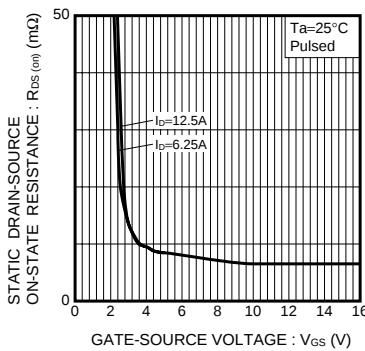


Fig.5 Static Drain-Source On-State Resistance vs. Gate-Source Voltage

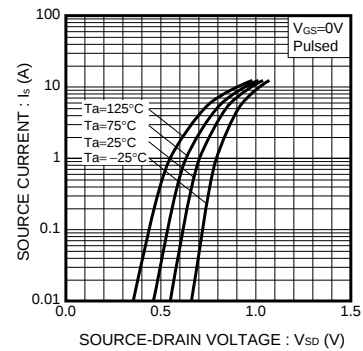


Fig.6 Source Current vs. Source-Drain Voltage

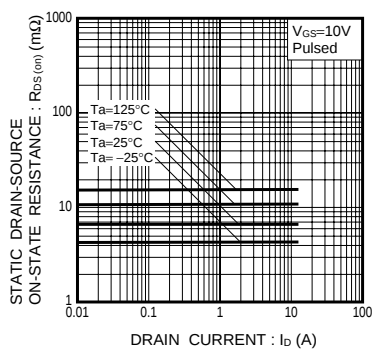


Fig.7 Static Drain-Source On-State Resistance vs. Drain Current (I)

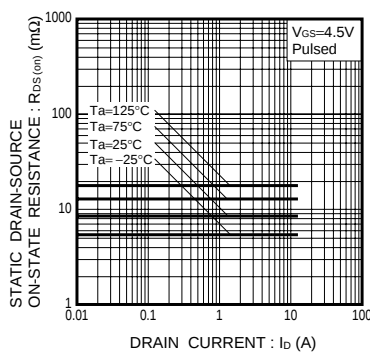


Fig.8 Static Drain-Source On-State Resistance vs. Drain Current (II)

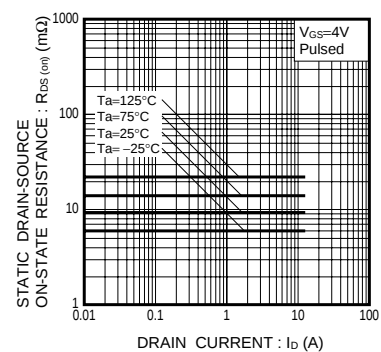


Fig.9 Static Drain-Source On-State Resistance vs. Drain Current (III)