

Technical Specification for Optical Transceiver Module

SCM7301-XC

- | | | |
|---|---|--|
| <input checked="" type="checkbox"/> 155.52Mb/s | <input type="checkbox"/> 622.08Mb/s | <input type="checkbox"/> other _____ |
| <input checked="" type="checkbox"/> Short Haul | <input type="checkbox"/> Long Haul | <input type="checkbox"/> other _____ |
| <input type="checkbox"/> Intermediate Reach | <input checked="" type="checkbox"/> Long Reach | <input type="checkbox"/> other _____ |
| <input type="checkbox"/> Single 5.0 V | <input checked="" type="checkbox"/> Single 3.3 V | <input type="checkbox"/> other _____ |
| <input checked="" type="checkbox"/> 1.3 μ m | <input type="checkbox"/> 1.55 μ m | <input type="checkbox"/> other _____ |
| <input type="checkbox"/> Transmitter | <input type="checkbox"/> Receiver | <input checked="" type="checkbox"/> Transceiver |
| | (<input type="checkbox"/> 2R / <input type="checkbox"/> 3R) | (<input type="checkbox"/> 2R / <input checked="" type="checkbox"/> 3R) |



SUMITOMO Electric reserves the right to make changes in the specification described hereinafter without prior notice.

#Safety Precaution **Symbols** This specification uses various picture symbols to prevent possible injury to operator or other persons or damage to properties for appropriate use of the product. The symbols and definitions are as shown below. Be sure to be familiar with these symbols before reading this specification.

⚠ Warning Wrong operation without following this instruction may lead to human death or serious injury.

⚠ Caution Wrong operation without following this instruction may lead to human injury or property damage.

Example of picture symbols

! indicates prohibition of actions. Action details are explained nearby.

⊘ indicates compulsory actions or instructions. Action details are explained near by.

(SCM7301-XC)

1. General

SCM7301-XC is a series of compact and high speed performance digital optical transceiver module ideally designed for versatile high speed network applications. 1300nm high speed InGaAsP-LD and InGaAs PIN-PD are provided as a light source and a detector, respectively. Transceiver module has PC board mountable package with electrical and optical interfaces.

| | |
|------------------------|-----------------------------------|
| * Data Rate | 155.52 Mbps, NRZ |
| * Duty Cycle | 50% |
| * Power Supply Voltage | Single +3.3V |
| * Electrical Interface | PECL |
| * Fiber Coupled Power | -8 ~ -15dBm (Typ. -11dBm) for SMF |
| * Sensitivity | -8 ~ -28dBm (Typ. -37dBm) |
| * Connector Interface | SC Duplex Connector |

The features of SCM7301-XC are listed below.

| | |
|------------------|---|
| * Features | Low Power Supply Voltage / Low Power Consumption Plastic Molded Package Multi-sourced Footprint |
| Transmitter..... | Uncooled Laser with Automatic Power Control IC Optical Output Shut-down (Disable) Laser Bias Current Monitor / Rear Facet Monitor Class 1 Laser Product (IEC 825-1 and FDA 21 CFR 1040.10 and 1040.11) |
| Receiver..... | Wide Dynamic Range Built-in Clock Recovery (including SAW filter) ITU-T G.957 / G.958 and Bellcore TA-NWT-000253 Compliant Signal Detect (FLAG) Function |

2. Block Diagram

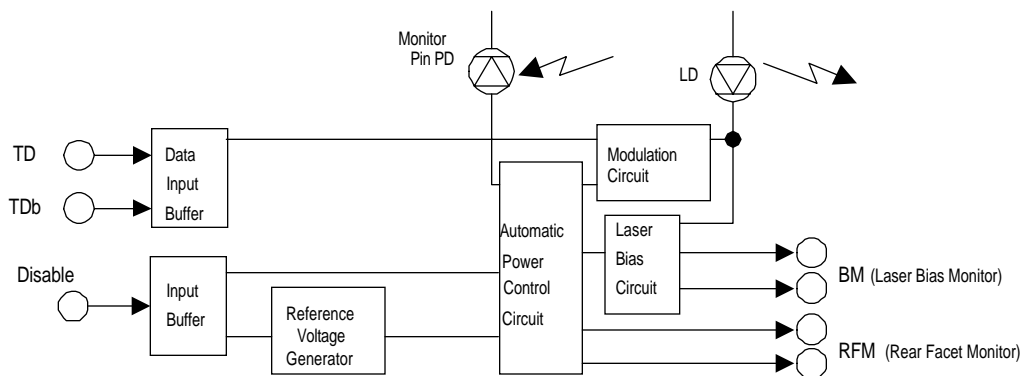


Figure 1-1. Block Diagram (Transmitter)

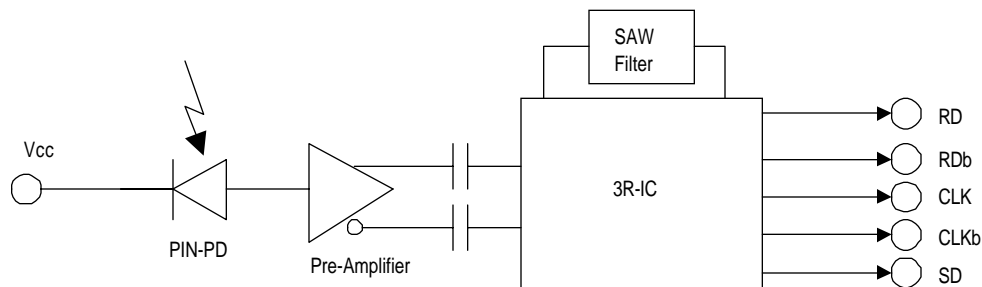


Figure 1-2 Block Diagram (Receiver)

3. Package Dimension

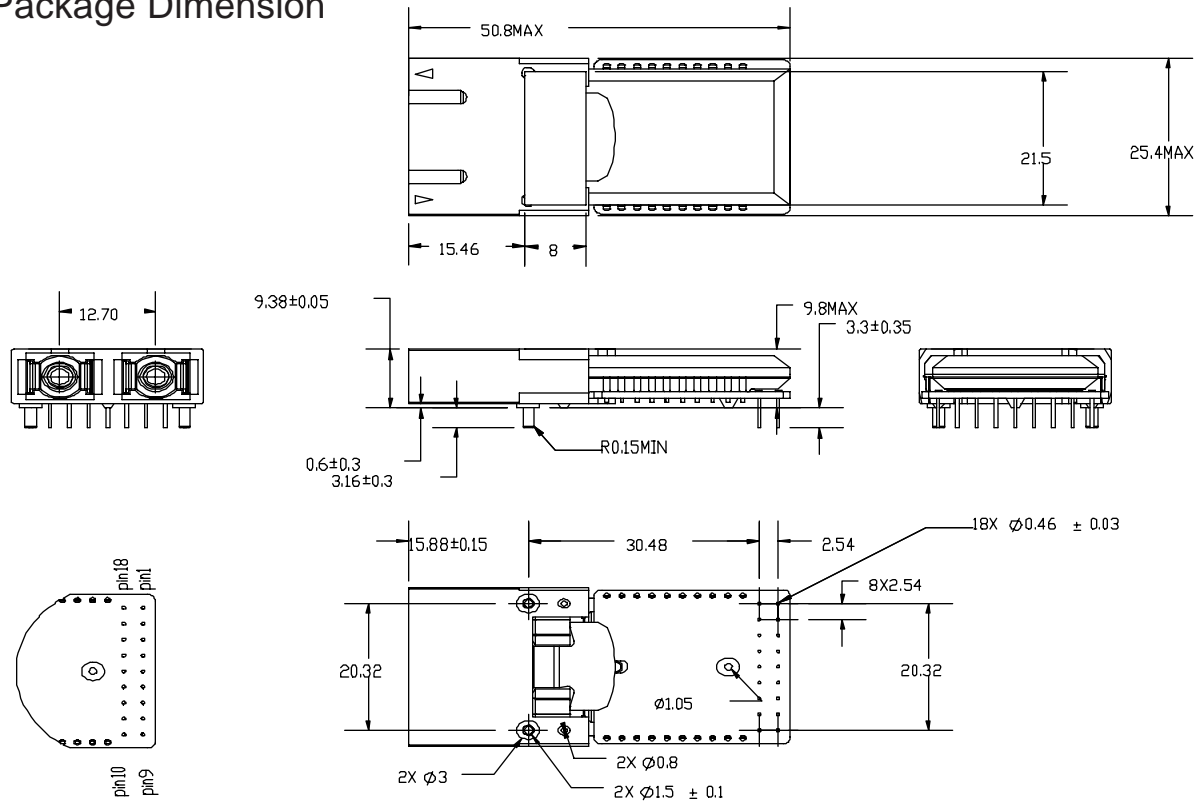


Figure 2. Package Dimension

⚠ Caution



Do not disassemble this product. Otherwise, failure, electrical shock overheating or fire may occur.

Handle the lead pin carefully. Use assisting tools or prospective aids as required. A lead pin may injure skin or human body

4. Pin Assignment

| No. | Symbol | Function |
|-----|----------|---|
| 1 | N/C | Non Connection (Internally) |
| 2 | N/C | Non Connection (Internally) |
| 3 | RCLKb | Differential Clock Output (Negative) |
| 4 | RCLK | Differential Clock Output (Positive) |
| 5 | BM(-) | Monitoring pin for LD Bias Monitor |
| 6 | BM(+) | Monitoring pin for LD Bias Monitor |
| 7 | Disable | LD Disable Input |
| 8 | RFM(+) | Monitoring pin for Rear Facet Monitor |
| 9 | RFM(-) | Monitoring pin for Rear Facet Monitor |
| 10 | Veetx | Power Supply (-) for Transmitter : Connected to GND |
| 11 | TD | Transmitter Differential Data (Positive) |
| 12 | TDb | Transmitter Differential Data (Negative) |
| 13 | Vcctx | Power Supply (+) for Transmitter : Connected to +3.3V |
| 14 | Vccrx | Power Supply (+) for Receiver : Connected to +3.3V |
| 15 | FLAG(SD) | FLAG (Signal Detect) |
| 16 | RDb | Received Differential Data (Negative) |
| 17 | RD | Received Differential Data (Positive) |
| 18 | Veerx | Power Supply (-) for Receiver : Connected to GND |

NC pins should left open for additional functions in the future

5. Absolute Maximum Ratings

| Parameter | Symbol | min. | Max | Unit | Note |
|--|---------|------|---------|------|------|
| Storage Case Temperature | Ts | -40 | 85 | °C | 1 |
| Operating Case Temperature | Tc | -5 | 70 | °C | 1, 2 |
| | | -40 | 85 | °C | 1, 3 |
| Supply Voltage | Vcc-Vee | 0.0 | 4.0 | V | 4 |
| Input Voltage | Vi | Vee | Vcc+0.5 | V | 5 |
| Lead Soldering (Temperature) (Time) | | | 260 | °C | 6 |
| | | | 10 | sec. | |

Note 1. No condensation allowed. 2. SCM7301-XC 3. SCM7301-XC-W 4. Vcc>Vee, Vcc=+3.3V, Vee=GND
5. TD, TDb, Disable 6. Measured on lead pin at 2mm (0.079in.) off the package bottom

Warning

⚠ Use the product with the rated voltage described in the specification. If the voltage exceeds the maximum rating, overheating or fire may occur.

Caution

⚠ Do not store the product in the area where temperature exceeds the maximum rating, where there is too much moisture or dampness, where there is acid gas or corrosive gas, or other extreme conditions. Otherwise, failure, overheating or fire may occur.

6. Electrical Interface

(Unless otherwise specified, Vcc-Vee = 3.14 to 3.47 V and all operating temperature shall apply.)

6-1. Transmitter side

| Parameter | Symbol | min. | Typ. | Max. | Unit | Note |
|-------------------------------|---------|---------|----------|----------|-------|---------|
| Supply Voltage | Vcc-Vee | 3.14 | 3.30 | 3.47 | V | |
| Supply Current | Idtx | | 70 | 140 | mA | 1, 2, 3 |
| Input Voltage TD, TDb | High | Vih | Vcc-1.17 | Vcc-0.73 | V | 4, 5 |
| | Low | Vil | Vcc-1.95 | Vcc-1.45 | | |
| Input Current TD, TDb | High | Iih | -10 | 150 | μA | 4, 5 |
| | Low | Iil | -10 | 10 | | |
| Signal Input Rise / Fall Time | | | | 0.5 | nsec. | 6 |
| Disable Input Voltage | Vdi | Vee+2.0 | | Vcc | V | 7 |
| Disable Input Current | Idi | -10 | 140 | 200 | μA | |
| LD Bias Monitor Voltage | Vbm | 0.01 | | 0.50 | V | 5, 8 |
| Rear Facet Monitor Voltage | Vrfm | 0.01 | | 0.20 | V | 5, 8 |

Note 1. Input bias current is not included. 2. 50% duty cycle data
3. 155.52Mbps 4. Vcc-Vee=3.3V 5. Tc=25°C 6. 20~80%
7. The transmitter is enabled as default state and requires an external voltage only to disable. (Refer to Section 8. Relation between Disable Input Voltage and Optical Output Power)
8. The Laser Bias and Rear Facet Monitor currents are calculated as ratios of the corresponding voltages to their current-sensing resistors, 10Ω and 200Ω, respectively (See Figure 3). Upon measuring or utilizing these values, please use a device whose impedance is high enough (>1MΩ) compared with those resistors.

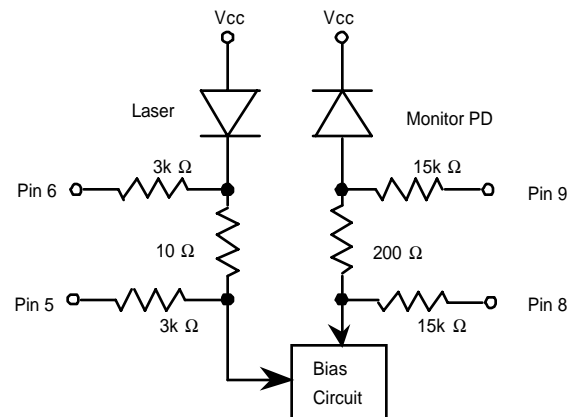


Figure 3 Monitor Circuit Schematic Diagram

6-2. Receiver side

| Parameter | Symbol | min. | Typ. | Max. | Unit | Note |
|------------------------|-----------|------|----------|----------|-------|---------|
| Supply Voltage | Vcc-Vee | 3.14 | 3.30 | 3.47 | V | |
| Supply Current | Idrx | | 115 | 160 | mA | 1,2 |
| Data & Clock | High | Voh | Vcc-1.10 | Vcc-0.86 | V | 3 |
| Output Voltage | Low | Vol | Vcc-1.86 | Vcc-1.62 | V | |
| FLAG | High | Voh | 2.40 | Vcc | V | 4 |
| Output Voltage | Low | Vol | Vee | 0.40 | V | |
| Clock Rise / Fall Time | Trc / Tfc | | | 700 | psec. | 5 |
| Data Rise / Fall Time | Trd / Tfd | | | 1000 | psec. | |
| Flag Assert Time | Ta | | | 100 | μsec | 6 |
| Flag Deassert Time | Td | 2.3 | | 100 | μsec | |
| Clock Sampling Point | Tcsp | 2.60 | 3.10 | 3.60 | nsec. | 7 |
| Clock Jitter (rms) | Tjc | | | 64 | psec. | 2, 3, 8 |
| Clock Duty | Cduty | 45 | 50 | 55 | % | |
| Data Jitter (rms) | Tjd | | | 100 | psec. | |

Note 1. Output current is not included. 2. Measured at the bit rate of 155.52Mbps, PRBS 2²³-1, NRZ

3. Vcc=+3.3V, Tc=25°C, Output load resistance RL=50Ω to Vcc-2V for RD, RDb, RCLK and RCLKb

4. CMOS interface

5. 20~80%, Input capacitance and stray capacitance of measuring devices should be less than 2pF

6. Refer to Figure 4. 7. Phase difference between rising edge of RD and Rising edge of RCLK. Refer to Figure 4.

8. Optical Input Power: -28.0 ~ -8.0dBm

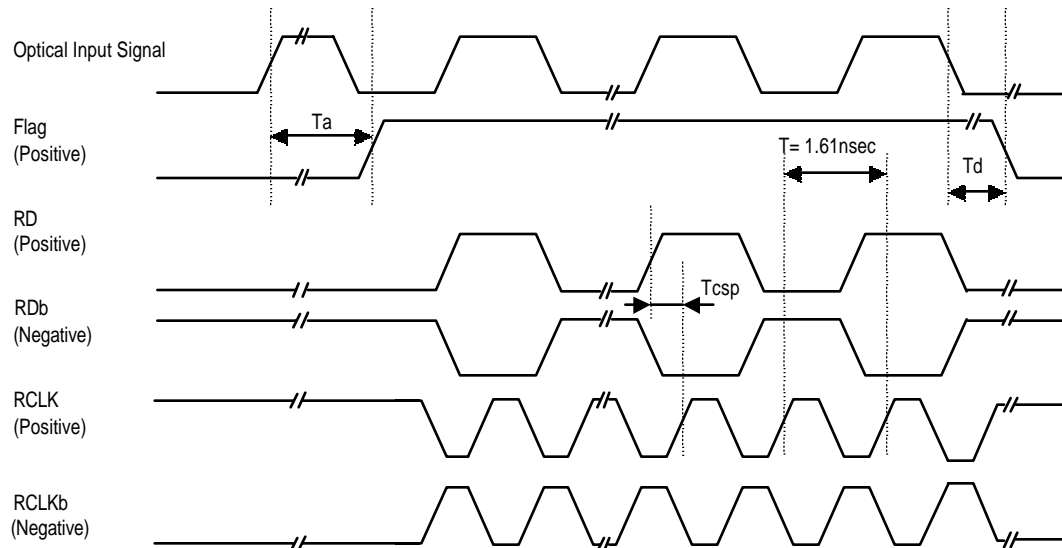


Figure 4. Timing Chart


7. Optical Interface

(Unless otherwise specified, Vcc-Vee = 3.14 to 3.47 V and all operating temperature shall apply.)

7-1. Transmitter side

| Parameter | Symbol | min. | Typ. | Max. | Unit | Note |
|-----------------------------|-------------------|-------|------|------|------|------|
| Average Output Power | Po | -15.0 | | -8.0 | dBm | 1 |
| Extinction Ratio | Er | 8.2 | | | dB | 1 |
| Center Wavelength | λ_c | 1261 | | 1360 | nm | |
| Spectral Width (RMS) | $\Delta\lambda$ | | | 7.7 | nm | |
| Eye Mask for Optical Output | Refer to Figure 5 | | | | | |

Note 1. Measured at 155.52Mbps PRBS2²³-1, 50% duty cycle data

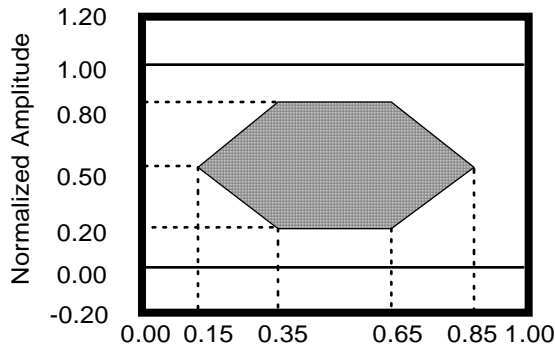

Relation between Input Signal and Optical Output Signal

| Input Signal | | Optical Output Signal |
|--------------|------|-----------------------|
| TD | TDb | |
| High | Low | ON (High) |
| Low | High | OFF (Low) |
| High | High | Undefined |
| Low | Low | Undefined |

Figure 5. Optical Pulse Mask with Fourth Order Bessel-Thomson Filter Specified in ITU-T G.95

Warning



Do not look at the laser beam projection area (e.g. end of optical connector) with naked eyes or through optical equipment while the power is supplied to this product. Otherwise, your eyes may be injured.

7-2. Receiver side

| Parameter | Symbol | min. | Typ. | Max. | Unit | Note |
|-----------------------------|--------|------------------|-------|-------|------|------|
| Bit Rate Range | - | 155.52 +/- 50ppm | | | Mbps | |
| Center Wavelength | - | 1261 | | 1580 | nm | |
| Minimum Sensitivity | Pmin | | -37.0 | -28.0 | dBm | 1, 2 |
| Overload | Pmax | -8.0 | | | dBm | 1, 2 |
| Consecutive Identical Digit | CID | 72 | 100 | | bits | 3 |
| Flag Assert Level | Pa | -50 | -42 | -34 | dBm | 2, 4 |
| Flag deassert Level | Pd | -50 | -43 | -34 | dBm | |

Note 1. BER=10⁻¹⁰

2. Measured at the bit rate of 155.52Mbps, PRBS 2²³-1, NRZ

3. Optical Input Power: -28.0 ~ -8.0dBm, Duty 50% input signal

4. Refer to Figure 4

8. Relation between Disable Input Voltage and Optical Output Power

| Disable Input Voltage | Optical Output Power |
|-----------------------|----------------------|
| "L" (Vee ~ Vee+0.4V) | Enabled |
| "H" (Vee+2.0 ~ Vcc) | Disabled (<-45dBm) |

Note. Enabled for no Disable input (pin 7 opened)

9. Reliability Test (Under qualification)

| Bellcore TA-NWT-000983 Issue 2, December 1993 | | | | | | | | |
|---|----------------------------|--------------------------------|--------------------------------|----------|----|-----|----------|-----|
| Heading | Test | Reference | Condition | Sampling | | | SEI Plan | |
| | | | | LTPD | SS | C | SS | F/C |
| Mechanical Integrity | Mechanical Shock | MIL-STD-883 Method 2002 | Condition B | | | | | |
| | | | 5 times/axis | 20% | 11 | 0 | --- | --- |
| | | | 500G, 1.0 ms | 20% | 11 | 0 | 11 | TBD |
| | | | 1,500G, 0.5ms | | | | | |
| | Vibration | MIL-STD-883 Method 2007 | Condition A | 20% | 11 | 0 | 11 | TBD |
| | | | 20 G | | | | | |
| Endurance | Accel. Aging (High Temp.) | (R)-453 Section 5.18 | 20-2,000 Hz | | | | | |
| | | | 4 min/cycle; 4 cycles/axis | | | | | |
| | | | | | | | | |
| | Thermal Shock | MIL-STD-883 Method 1011 | $\Delta T=100^{\circ}\text{C}$ | 20% | 11 | 0 | 11 | TBD |
| | Solderability | MIL-STD-883 Method 2003 | (steam aging not required) | 20% | 11 | 0 | 11 | 0 |
| | Fiber Pull | | 1 Kg; 3 times; 5sec. | 20% | 11 | 0 | --- | --- |
| | | | 2 Kg; 3 times; 5sec. | 20% | 11 | 0 | --- | --- |
| | High Temp. Storage | ----- | +85C; rated power | --- | 25 | --- | 25 | TBD |
| | | | >5,000hrs. | --- | 10 | --- | --- | --- |
| | Low Temp. Storage | ----- | >10,000hrs. | | | | | |
| | | | max. storage T (T=85°C) | 20% | 11 | 0 | --- | --- |
| Special Tests | Temperature Cycling | Section 5.20 | >2,000 | | | | | |
| | | | min. storage T (T=-40°C) | 20% | 11 | 0 | 11 | TBD |
| | Damp Heat (if using epoxy) | MIL-STD-202 M103 or IEC 68-2-3 | >2,000 | | | | | |
| | | | - 40°C to +85°C | 20% | 11 | 0 | --- | --- |
| | | | 400 times pass/fail | --- | 11 | --- | --- | --- |
| | Cyclic Moisture Resistance | Section 5.23 | 500 times for info. | 20% | 11 | 0 | 11 | TBD |
| | | | 500 times pass/fail | --- | 11 | --- | 11 | TBD |
| | ESD Threshold | Section 5.22 | 1000 times for info. | --- | 11 | --- | 11 | TBD |
| | | | | | | | | |

10. Laser Safety







This product uses a semiconductor laser system and is a laser class 1 product acc. FDA, complies with 21CFR 1040. 10 and 1040.11. Also this product is a laser class 1 product acc. IEC 825-1.

11. Other Precaution

Under such a strong vibration environment as in automobile, the performance and reliability are not guaranteed.

The governmental approval is required to export this product to other countries. To dispose of these components, the appropriate procedure should be taken to prevent illegal exportation.

This module must be handled, used and disposed of according to your company's safe working practice.

|  Warning | |
|---|--|
|  | Be sure to carry out correct soldering for connection to peripheral circuits in order to prevent contact failure or short-circuit. Otherwise, a strong laser beam may cause eye injury, overheating or fire. |
|  | Do not put this product or components of this product into your mouth. This product contains material harmful to health. |
|  Caution | |
|  | Be sure to turn the power off when you touch this product connected to the printed circuit boards. Otherwise, electric shock may occur. |
|  | Dispose this product or equipment including this product properly as an industrial waste according to the regulations. |

12. Ordering Information

| Ordering Number | Connector type | Operating Temperature |
|-----------------|---------------------|-----------------------|
| SCM7301-XC | SC Duplex Connector | -5 ~ 70°C |
| SCM7301-XC-W | SC Duplex Connector | -40 ~ 85°C |

13. For More Information

U.S.A.

Sumitomo Electric Lightwave Corp.
78 Alexander Drive
Research Triangle Park, NC 27709
Tel. (919)541-8100
Fax. (919)541-8376
E-mail: info@sel-rtp.com
<http://www.sel-rtp.com>

Europe

Sumitomo Electric Europe Ltd.
Unit 11, Magnolia House
Spring Villa Park, Spring Villa Road
Edgware, Middlesex, HA8 7EB,
United Kingdom
Tel. (081)905-6160
Fax. (081)905-6195

Japan

Sumitomo Electric Industries, Ltd.
(International Business Division)
3-12, Moto-Akasaka 1-chome
Minato-ku Tokyo 107-8468
Tel. (03)3423-5771
Fax. (03)3423-5099

E-mail: product-info@yfocs.sei.co.jp

http://www.sei.co.jp/Electro-optic/eopd_home_e.html