
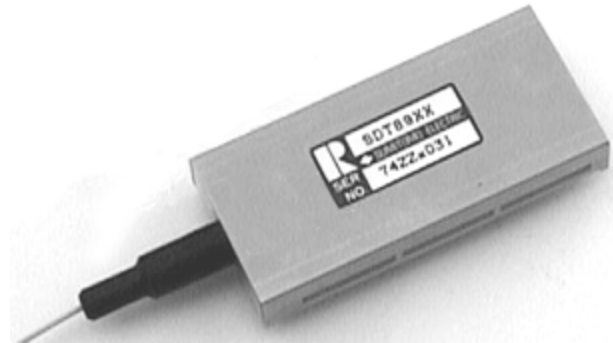




Technical Specification for 2.5Gbps Fiber Optic Receiver Module

SDT8918-R_-Q_

- | | | |
|---|--|--|
| ☐ 155.52Mb/s | ☐ 622.08Mb/s | ☒ other <u>2488.32Mbps</u> |
| ☐ Short Haul | ☒ Long Haul | ☐ other _____ |
| ☐ Intermediate Reach | ☒ Long Reach | ☒ other <u>Vcc=+5V</u> |
| ☐ Single 5.0 V | ☐ Single 3.3 V | ☒ other <u>Vapd = +86 to 94V</u> |
| ☒ 1.3 μ m | ☒ 1.55 μ m | ☐ other _____ |
| ☐ Transmitter | ☒ Receiver | ☐ Transceiver |
| | (☐ 2R / ☒ 3R) | (☐ 2R / ☐ 3R) |

SUMITOMO ELECTRIC INDUSTRIES, LTD.

Sumitomo Electric reserves the right to make changes in this specification without prior notice.

#Safety Precaution Symbols This specification uses various picture symbols to prevent possible injury to operator or other persons or damage to properties for appropriate use of the product. The symbols and definitions are as shown below. Be sure to be familiar with these symbols before reading this specification.

	Warning	Wrong operation without following this instruction may lead to human death or serious injury.
	Caution	Wrong operation without following this instruction may lead to human injury or property damage.

Example of picture symbols



indicates prohibition of actions. Action details are explained thereafter.



indicates compulsory actions or instructions. Action details are explained thereafter.

(SDT8918-R_-Q_)

1. General

The features of SDT8918-R_-Q_ are listed below:

- * SDH STM-16 L-16.1, L-16.2 & L-16.3 / SONET OC-48 LR-1, LR-2 & LR-3 Compliant
- * Power Supply Voltage +5V for Vcc, +86 to 94V for Vapd
- * Low Power Supply Current 350mA (typ.) for Vcc, 1mA (typ.) for Vapd
- * Compact Package Size 58.4 X 26.8 X 8.5 mm
- * Built-in Clock Recovery (Including SAW filter)
- * Optical Input Power Monitor
- * Signal Detect (FLAG) Function
- * Optical Connector Interface FC / SC connector

2. Block Diagram

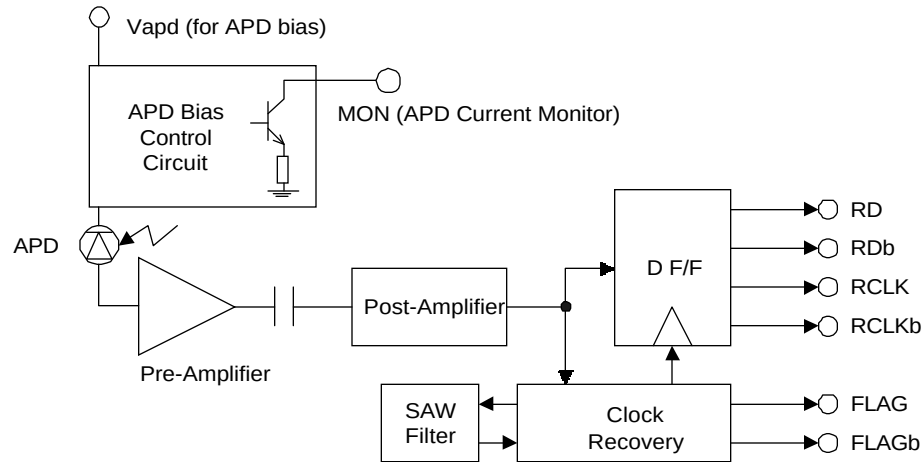


Figure 1 Block Diagram

3. Package Dimension

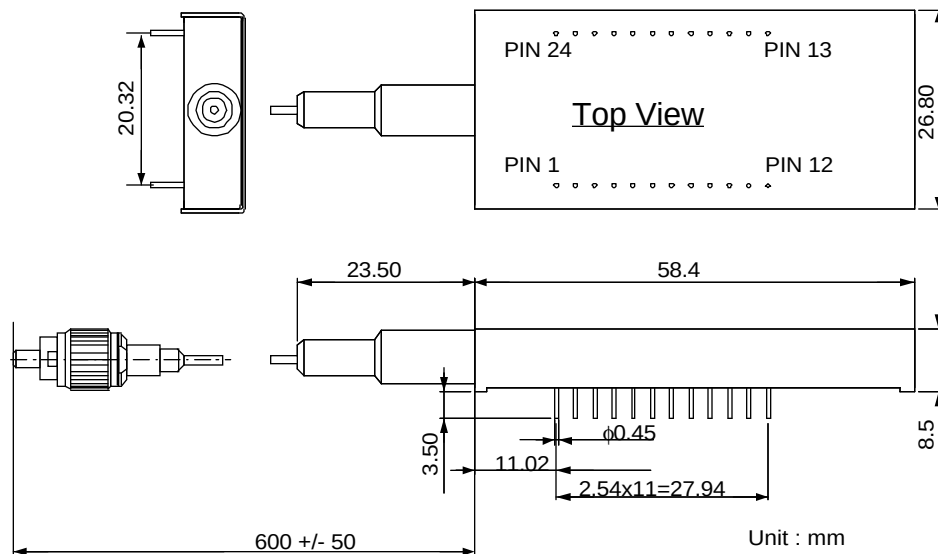


Figure 2. Package Dimension

⚠ Caution

- Do not disassemble this product. Otherwise, failure, electrical shock, overheating or fire may occur.
- Handle the lead pins carefully. Use assisting tools or prospective aids as required. A lead pin may injure skin or human body

4. Pin Assignment

Pin	Symbol	I/O	Level	Description
1	Vapd		+86~94V	Positive power supply for APD bias
2	GND		GND	Negative power supply (GND)
3	MON		MON	Optical Input Power Monitor
4	GND		GND	Negative power supply (GND)
5	RDb	O	CML	Differential data output (negative)
6	RD	O	CML	Differential data output (positive)
7	GND		GND	Negative power supply (GND)
8	GND		GND	Negative power supply (GND)
9	RCLKb	O	CML	Differential clock output (negative)
10	RCLK	O	CML	Differential clock output (positive)
11	GND		GND	Negative power supply (GND)
12	GND		GND	Negative power supply (GND)
13	Vccd		+5V	Positive power supply for digital circuits
14	Vccd		+5V	Positive power supply for digital circuits
15	Vccd		+5V	Positive power supply for digital circuits
16	Vccd		+5V	Positive power supply for digital circuits
17	GND		GND	Negative power supply (GND)
18	GND		GND	Negative power supply (GND)
19	GND		GND	Negative power supply (GND)
20	GND		GND	Negative power supply (GND)
21	FLAG	O	CMOS	Flag for loss of signal (LOS), normal high and active (LOS) low
22	FLAGb	O	CMOS	Flag for loss of signal (LOS), normal low and active (LOS) high
23	Vcca		+5V	Positive power supply for analog circuits
24	Vcca		+5V	Positive power supply for analog circuits

Power Supply(+) Vapd, Vccd and Vcca are not connected each other.

5. Absolute Maximum Ratings

Parameter	Symbol	min.	Max	Unit	Note
Storage Case Temperature	Ts	-40	85	°C	1
Operating Case Temperature	Tc	0	70	°C	1
Supply Voltage	Vccd, Vcca	0.0	6.0	V	2
	Vapd	0.0	100.0		
Optical Input Power	Pin		-5.0	dBm	
Lead Soldering (Temperature) (Time)			260	°C	3
			10	sec.	

Note 1. No condensation allowed. 2. GND = 0.0V

3. Measured on lead pin at 2mm (0.079in.) off the package bottom

Warning



Use the product with the rated voltage described in the specification. If the voltage exceeds the maximum rating, overheating or fire may occur.

Caution



Do not store the product in the area where temperature exceeds the maximum rating, where there is too much moisture or dampness, where there is acid gas or corrosive gas, or other extreme conditions. Otherwise, failure, overheating or fire may occur.

6. Electrical Interface

(Unless otherwise specified, V_{cca} , V_{ccd} = 4.75 to 5.25 V, V_{apd} = +86 to 94V, @2488.32Mbps, PRBS2²³-1,50% duty and all operating temperature shall apply.)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Supply Voltage	V_{cca}, V_{ccd}	4.75	5.00	5.25	V	
	V_{apd}	86.0	90.0	94.0		
Supply Current (V_{cca} and V_{ccd})	I_{drx}		350	450	mA	1, 2
Supply Current (V_{apd})	I_{apd}		1.0	2.0	mA	1, 3
Output Voltage Swing (RD, RDb)	V_{ord}	0.30		0.80	V	4, 5
Output Voltage Swing (RCLK, RCLKb)	V_{orc}	0.30		0.80	V	4, 5
Output Voltage (FLAG, FLAGb)	High	V_{ofgh}	$V_{cc}-0.20$	V_{cc}	V	4
	Low	V_{ofgl}	0	0.20	V	
Output Signal Rise / Fall Time (RD, RDb, 20% - 80%)	T_{rd}/T_{fd}		120	180	ps	
Output Signal Rise / Fall Time (RCLK, RCLKb, 20% - 80%)	T_{rc}/T_{fc}		120	180	ps	
Clock / Data Output Skew	T_{skew}	160	200	270	ps	6
Output Clock Duty	C_{duty}	45	50	55	%	7
Clock Jitter (RMS)	T_{jc}			0.010	UI	7
Optical Input Power Monitor Current	I_{mon}	170	270	410	μA	8
		6.8	10.5	15.5	μA	9

1. 2488.32Mbps, PRBS 2²³-1 2. Output current is not included. 3. APD current is included. Pin = -28 ~ -9dBm 4. V_{ccd} , V_{cca} = 5.0V, V_{apd} = 90V, T_c = 25°C
5. R_I = 50 Ω , Single end out. 6. Please refer to Figure 4. 7. 2488.32Mbps, PRBS 2²³-1, NRZ 8. Pin=-9dBm 9. Pin=-28dBm

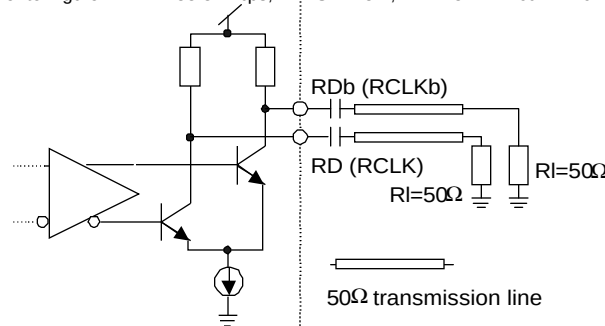


Figure 3 Data and Clock Output Interface (CML Interface)

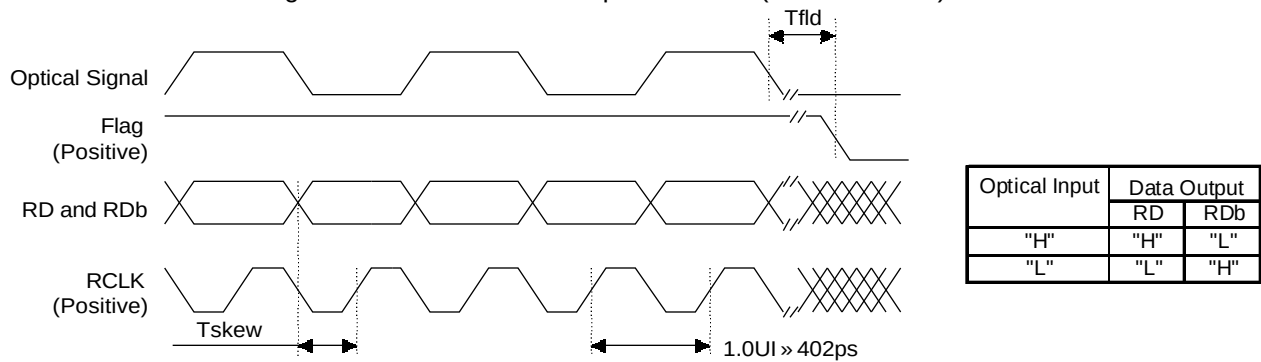


Figure 4 Output Timing Chart

7. Optical Interface

(Unless otherwise specified, V_{cca} , V_{ccd} = 4.75 to 5.25 V, V_{apd} = 90V, @2488.32Mbps, PRBS2²³-1,50% duty and all operating temperature shall apply.)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Bit Rate Range		2488.32 +/-50ppm			Mbps	
Center Wavelength Range	λ_c	1260		1360	nm	
		1500		1580	nm	
Minimum Sensitivity	P_{min}			-28.0	dBm	1
Overload	P_{max}	-9.0			dBm	1
Input Jitter Tolerance	Compliant with Bellcore 253-CORE and ITU G-958					
Consecutive Identical Digit	CID	72	100		bits	
Flag Assert Level	P_a	-48.0	-42.0	-28.0	dBm	2
Flag Deassert Level	P_d	-48.0	-43.0	-28.0	dBm	2
Flag Deassertion Time	T_{fd}	2.3		100	μsec	3
Optical Reflectance	O_r			-27.0	dB	

1. BER = 10⁻¹⁰ 2. 2488.32Mbps, PRBS 2²³-1, NRZ 3. Please refer to Figure 4

8. Recommended User Interface

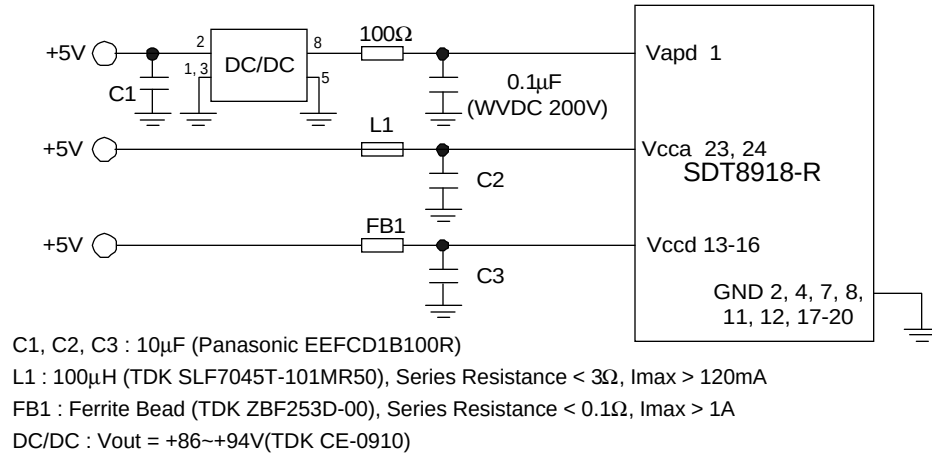


Figure 5 Recommended Power Supply Filtering

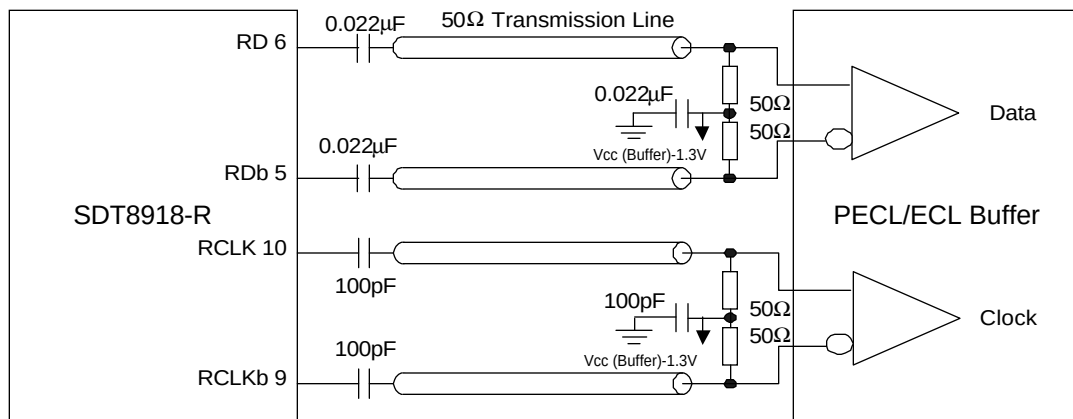


Figure 6 Recommended interface with PECL / ECL Device

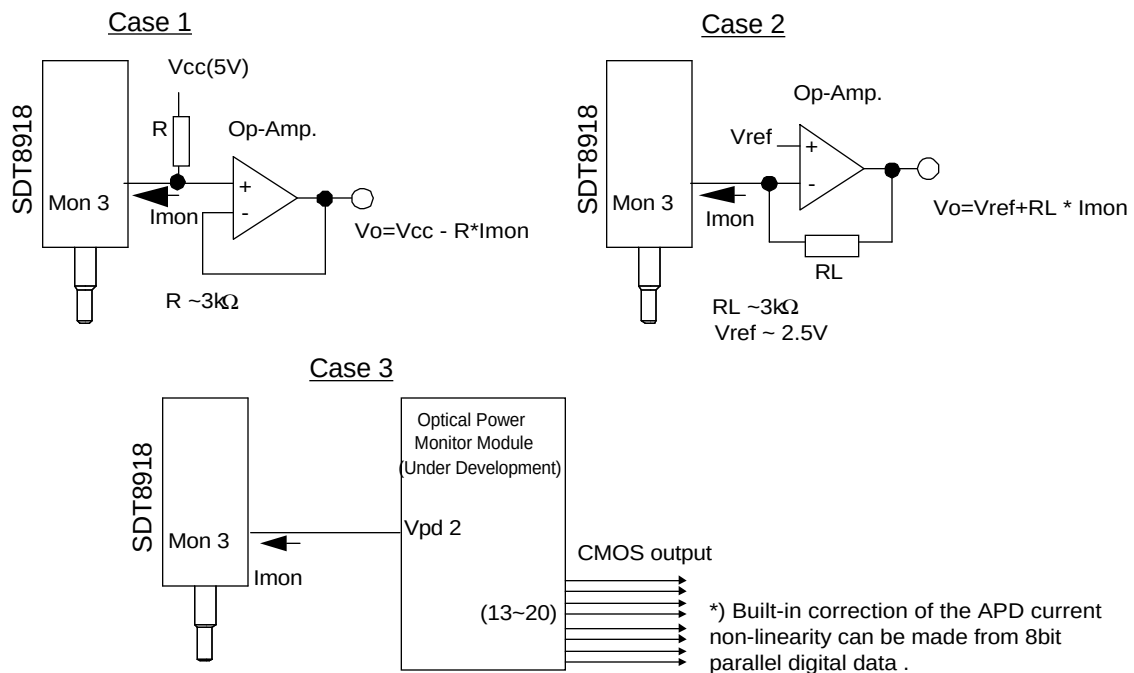


Figure 7 Optical Input Power Monitor Interface

9. Fiber Pigtail Specification

Parameter	Min.	Typ.	Max.	Unit	Note
Core Diameter		9.5		μm	
Cladding Diameter		125		μm	
Outer Diameter		0.9		mm	
Optical Cord Tensile Beak Strength			9.8	N	
Bend Radius	30			mm	





⚠ Caution




Do not give undue force or impact to the optical fiber pigtail. A broken optical fiber may injure skin or human body, or a strong laser beam may cause eye injury. Operate the equipment carefully. Use assisting tools or prospective aids as required.

10. Characteristic Information


@2488.32Mbps, PRBS2²³-1, 50% duty, Vcca=5.0V, Vccd=5.0V, Vapd=90V

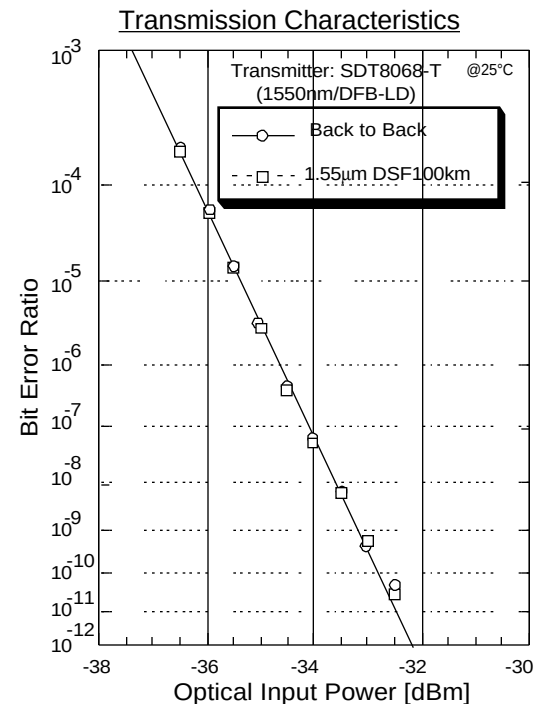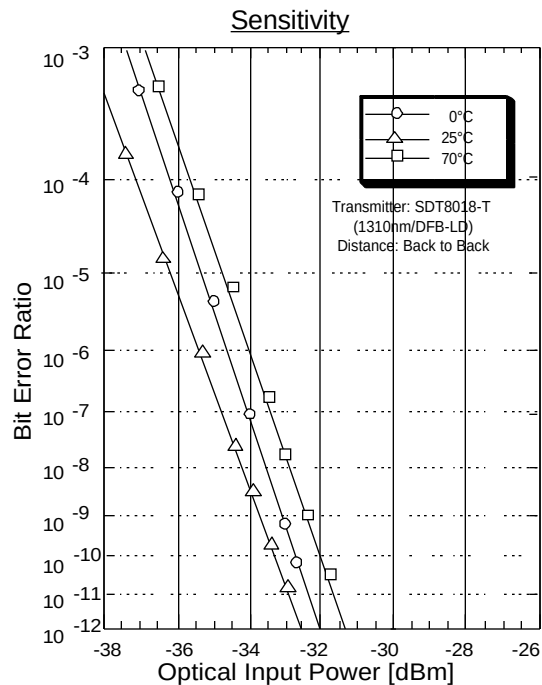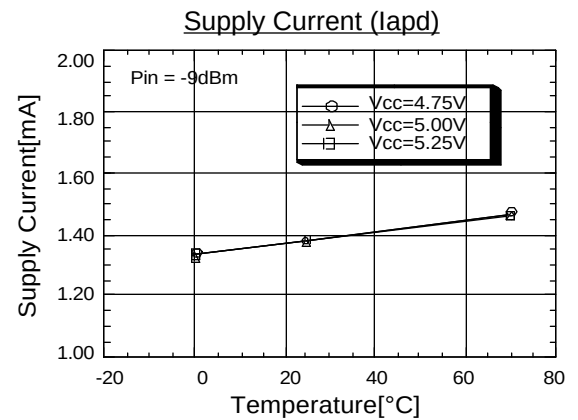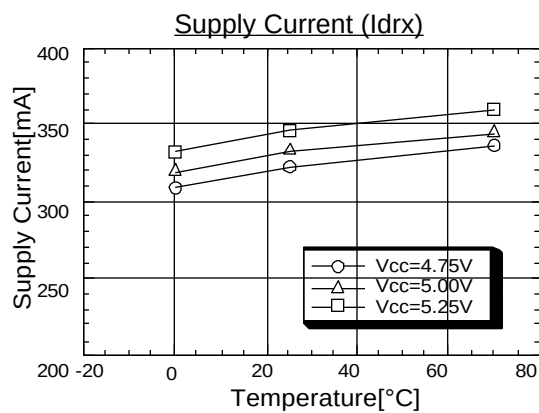


FLAG Level

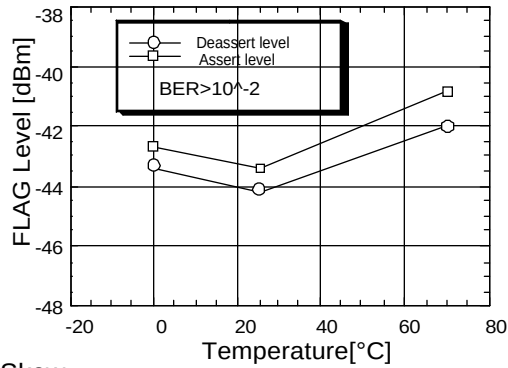


Clock/Data Output Skew

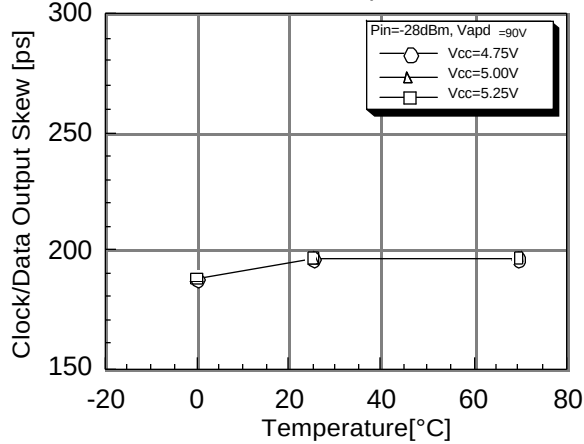


FLAG Deassertion Time

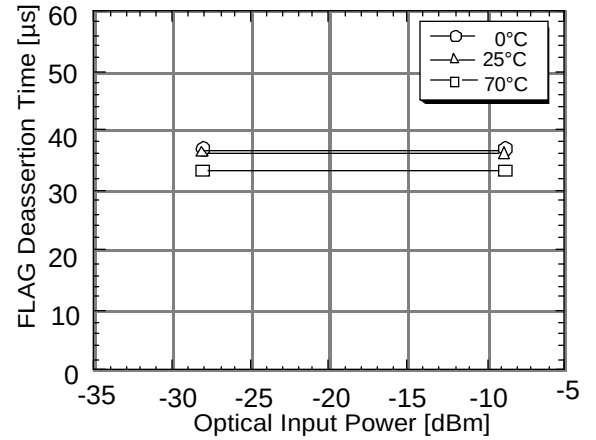


Optical Input Power Monitor

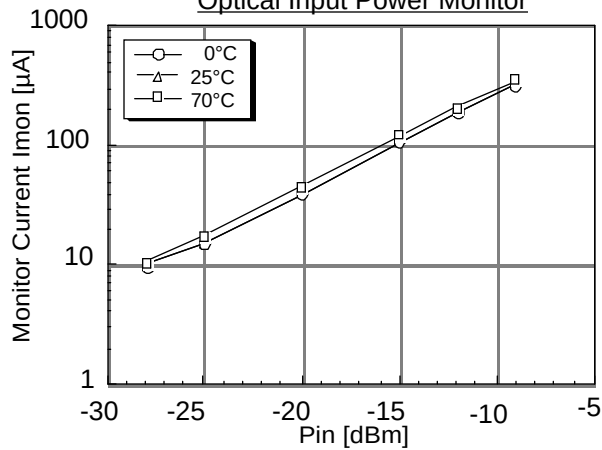


Clock Jitter

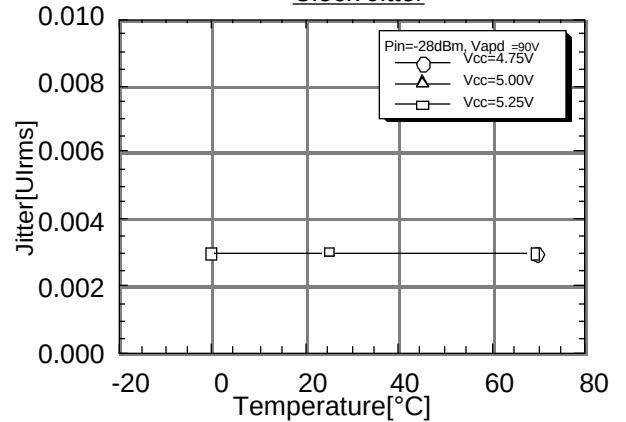


Jitter Transfer

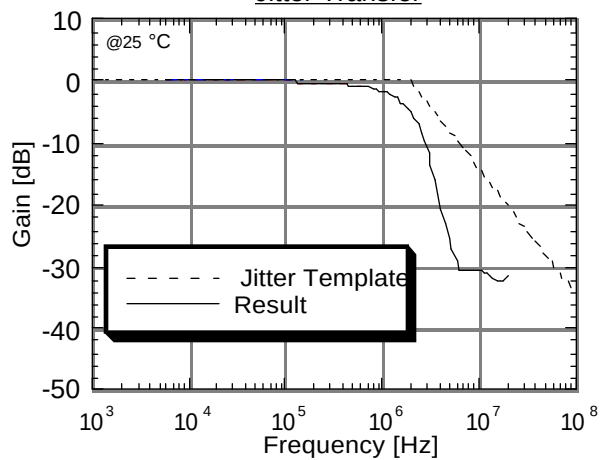

Jitter Tolerance

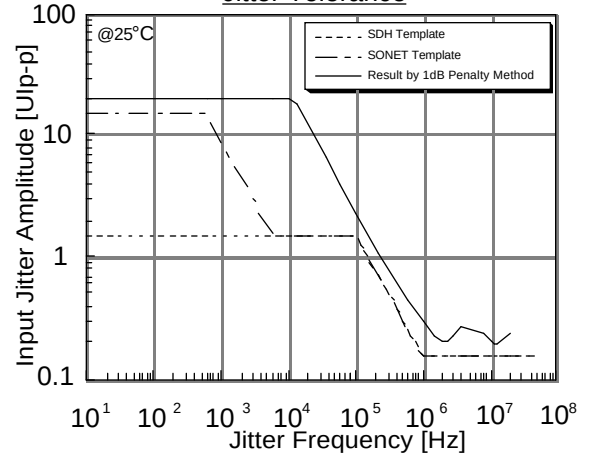

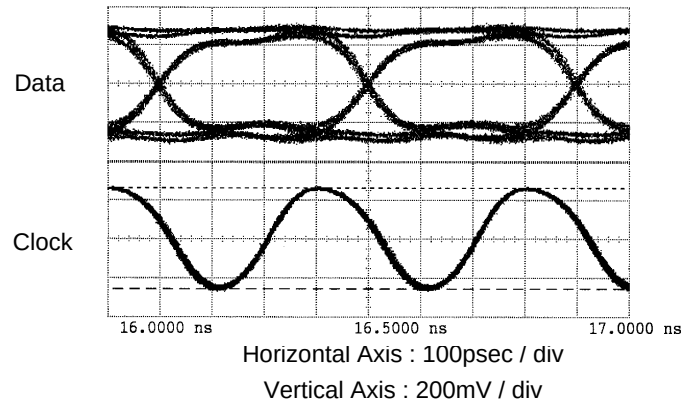Typical Output Waveform @Tc=25°C, Pin=-28.0dBm

11. Reliability Test

Bellcore TA-NWT-000983 Issue 2, December 1993								
Heading	Test	Reference	Condition	Sampling			SEI Plan	
				LTPD	SS	C	SS	F/C
Mechanical Integrity	Mechanical Shock	MIL-STD-883 Method 2002	Condition B 5 times/axis 500G, 1.0 ms 1,500G, 0.5ms	20% 20%	11 11	0 0	11 ---	0 ---
	Vibration	MIL-STD-883 Method 2007	Condition A 20 G 20-2,000 Hz 4 min/cycle; 4 cycles/axis	20%	11	0	11	0
	Thermal Shock	MIL-STD-883 Method 1011	$\Delta T=100^{\circ}\text{C}$	20%	11	0	11	0
	Solderability	MIL-STD-883 Method 2003	(steam aging not required)	20%	11	0	11	0
	Fiber Pull		1 Kg; 3 times; 5sec.	20%	11	0	---	---
			2 Kg; 3 times; 5sec.	20%	11	0	---	---
Endurance	Accel. Aging (High Temp.)	(R)-453 Section 5.18	+85°C; rated power >5,000hrs.	---	25	---	25	0
			>10,000hrs.	---	10	---	---	---
	High Temp. Storage	-----	max. storage T (T=85°C) >2,000	20%	11	0	---	---
	Low Temp. Storage	-----	min. storage T (T=-40°C) >2,000	20%	11	0	11	0
	Temperature Cycling	Section 5.20	- 40°C to +85°C 400 times pass/fail	20% ---	11 11	0 ---	---	---
			500 times pass/fail	20%	11	0	11	0
			1000 times for info.	---	11	---	11	0
	Damp Heat (if using epoxy)	MIL-STD-202 M103 or IEC 68-2-3	40°C , 95%, 56days or 85°C /85%RH 2,000hrs.	20% 20%	11 11	0 0	11 ---	0 ---
	Cyclic Moisture Resistance	Section 5.23	-----	20%	11	0	11	0
Special Tests	Internal Moisture	MIL-STD-883 Method 1018	< 5,000 ppm water vapor	20%	11	0	11	0
	Flammability	TR357:Sec. 4.4.2.5	-----	---	---	---	---	OK
	ESD Threshold	Section 5.22	-----	---	6	---	6	0

12. Ordering Information

Ordering Number	Connector type
SDT8918-RC-QN	SC
SDT8918-RD-QN	FC / PC

13. Other Precaution

Under such a strong vibration environment as in automobile, the performance and reliability are not guaranteed.

The governmental approval is required to export this product to other countries. To dispose of these components, the appropriate procedure should be taken to prevent illegal exportation.

This module must be handled, used and disposed of according to your company's safe working practice.

 Warning	
	Be sure to carry out correct soldering for connection to peripheral circuits in order to prevent contact failure or short-circuit. Otherwise, a strong laser beam may cause eye injury, overheating or fire.
	Do not put this product or components of this product into your mouth. This product contains material harmful to health.

 Caution	
	Be sure to turn the power off when you touch this product connected to the printed circuit boards. Otherwise, electric shock may occur.
	Dispose this product or equipment including this product properly as an industrial waste according to the regulations.

14. For More Information

U.S.A.

Sumitomo Electric Lightwave Corp, 78 Alexander Drive, Research Triangle Park, NC 27709

Tel. (919)541-8100 / Fax. (919)541-8376

E-mail: info@sumitomoelectric.com

<http://www.sumitomoelectric.com>

Europe

Sumitomo Electric Europe Ltd., Unit 11, Magnolia House, Spring Villa Park, Spring Villa Road

Edgware, Middlesex, HA8 7EB, United Kingdom

Tel. (0181)905-6120

Fax. (0181)905-6167

Japan

Sumitomo Electric Industries, Ltd. (International Business Division), 3-12, Moto-Akasaka 1-chome

Minato-ku Tokyo 107-8468

Tel. (03)3423-5771 / Fax. (03)3423-5099

E-mail: product-info@yfocs.sei.co.jp

http://www.sei.co.jp/Electro-optic/eopd_home_e.html