

Sumitomo Electric Industries, Ltd.

Part No.: SLT3000 Series

Document No.: HUW9824040-01C

Date of issue: April 5, 2000



Technical Specification
Of
1.3 μ m MQW-FP Laser Diode Module
SLT3000 Series

1. General

SLT3000 Series are 1.3 μ m InGaAsP/InP MQW-FP laser diode modules designed for fiber optic communication systems. These modules are ideally suitable for intermediate reach of up to 622Mb/s transmission applications and have low threshold current and high performance at high temperature. A laser diode is mounted into a coaxial package integrated with an InGaAs monitor PD, a single mode fiber pigtail.

2. Package dimension and pin assignment

(See attached appendix.)

3. Absolute maximum ratings ($T_c=25^\circ\text{C}$, unless otherwise noted.)

Parameter	Symbol	Ratings	Unit
Storage temperature	Tstq	-40~+90	°C
Operating case temperature	Top	-40~+85	°C
Forward current (LD)	IfL	150	mA
Reverse voltage (LD)	VrL	2	V
Reverse voltage (PD)	VrP	15	V
Reverse current (PD)	IrP	2	mA
Soldering temperature (<10sec.)	Stemp	260	°C

4. Electrical and optical characteristics ($P_f=0.2\text{mW}$, $T_c=25^\circ\text{C}$, unless otherwise noted.)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Threshold current	I _{th}	CW	-	8	15	mA
		CW, $T_c=-40\sim+85^\circ\text{C}$	-	-	40	
Optical output power	P _f	CW, I _f =I _{th} +20mA	0.10	0.20	0.30	mW
		W, I _f =I _{th} +20mA, $T_c=-40\sim+85^\circ\text{C}$	0.05	-	-	
Operating voltage	V _f	CW, $T_c=-40\sim+85^\circ\text{C}$	-	-	1.6	V
Slope efficiency	Se	CW, Average(I _{th} to I _{th} +20mA)	0.005	-	-	mW/mA
Central wavelength	λ_c	CW	1290	1310	1330	nm
		CW, $T_c=-40\sim+85^\circ\text{C}$	1260	-	1360	
Spectral width	$\Delta\lambda$	CW, RMS, $T_c=-40\sim+85^\circ\text{C}$	-	2	5	nm
Tracking error	ΔP_f	I _m hold(@ P _f =0.2mW(25°C)), CW $T_c=-40\sim+85^\circ\text{C}$	-1.0	-	1.0	dB
Rise time	t _r	I _b =I _{th} , 20-80%, $T_c=-40\sim+85^\circ\text{C}$	-	0.30	0.50	nsec.
Fall time	t _f	I _b =I _{th} , 80-20%, $T_c=-40\sim+85^\circ\text{C}$	-	0.30	0.50	nsec.
Extinction ratio	Er	$10\log(0.2\text{mW}/P_f(I_{th}))$ $T_c=-40\sim+85^\circ\text{C}$	10	-	-	dB
Monitor current	I _m	CW, V _{rP} =5V, $T_c=-40\sim+85^\circ\text{C}$	150	-	1500	pA
Monitor dark current	I _d	V _{rP} =5V	-	1	10	nA
Monitor capacitance	C	V _{rP} =5V, f=1 MHz	-	-	10	pF

5. Fiber pigtail specification

Parameter	Min.	Typ.	Max.	Unit
Type	Single Mode			
Mode field diameter	8.5	9.5	10.5	μm
Cladding diameter	122	125	128	μm
Outer jacket diameter	0.8	0.9	1.0	mm
Bending radius	30	-	-	mm

Sumitomo Electric Industries, Ltd.

Part No.: SLT3000 Series

Document No.: HUW9824040-01C

Date of issue: April 5, 2000

6. Ordering Information

Part number	Pin assignment	Connector type	Flange type (hole pitch)
SLT3000-CS	Type A	SC/PC	Horizontal (12.7mm)
SLT3000-DP		FC/PC	Vertical (12mm)
SLT3001-DS	Type B	FC/PC	Horizontal (12.7mm)
SLT3006-XN	Type C	No connector	Flangeless

7. Precaution

- (1) Radiation emitted by laser devices can be dangerous to the eyes. Avoid eye or skin exposure to direct or scattered radiation.
- (2) The governmental approval is required to export this product to other countries. To dispose of this product, the appropriate procedure should be taken to prevent illegal exportation.
- (3) The modules should be handled in the same manner as ordinary semiconductor devices to prevent the electro-static damages. For safe keeping and carrying, the modules should be packaged with ESD proof material. To assemble the modules on PCB, the workbench, the soldering iron and the human body should be grounded.
- (4) The stress to the fiber pigtail may cause the damage on the performance. The fiber pigtail may snap off by dropping the module.
- (5) Please pay special attention to the atmosphere condition because the dew on the module may cause some electrical damages.
- (6) Under such a strong vibration environment as in automobile, the performance and reliability are not guaranteed.

Appendix

Part No.: SLT300□-□□/□□□
(Customize code)

Code	Connector type
C	SC/PC
D	FC/PC
X	No connector

Connector type

Code	Flange type
N	Flangeless
P	Vertical (12.0mm)
S	Horizontal (12.7mm)
X	(Customize)

Flange type


Code	Pin assignment
0	Type A
1	Type B
6	Type C
7	Type D

Pin assignment

Pin No.	Pin function for type D
1	(CASE)
2	LD anode
3	PD cathode
4	LD cathode/PD anode

Pin No.	Pin function for type C
1	(CASE)
2	LD cathode
3	PD anode
4	LD anode/PD cathode

Pin No.	Pin function for type A and type B
1	LD anode (CASE)
2	LD cathode
3	PD cathode
4	PD anode

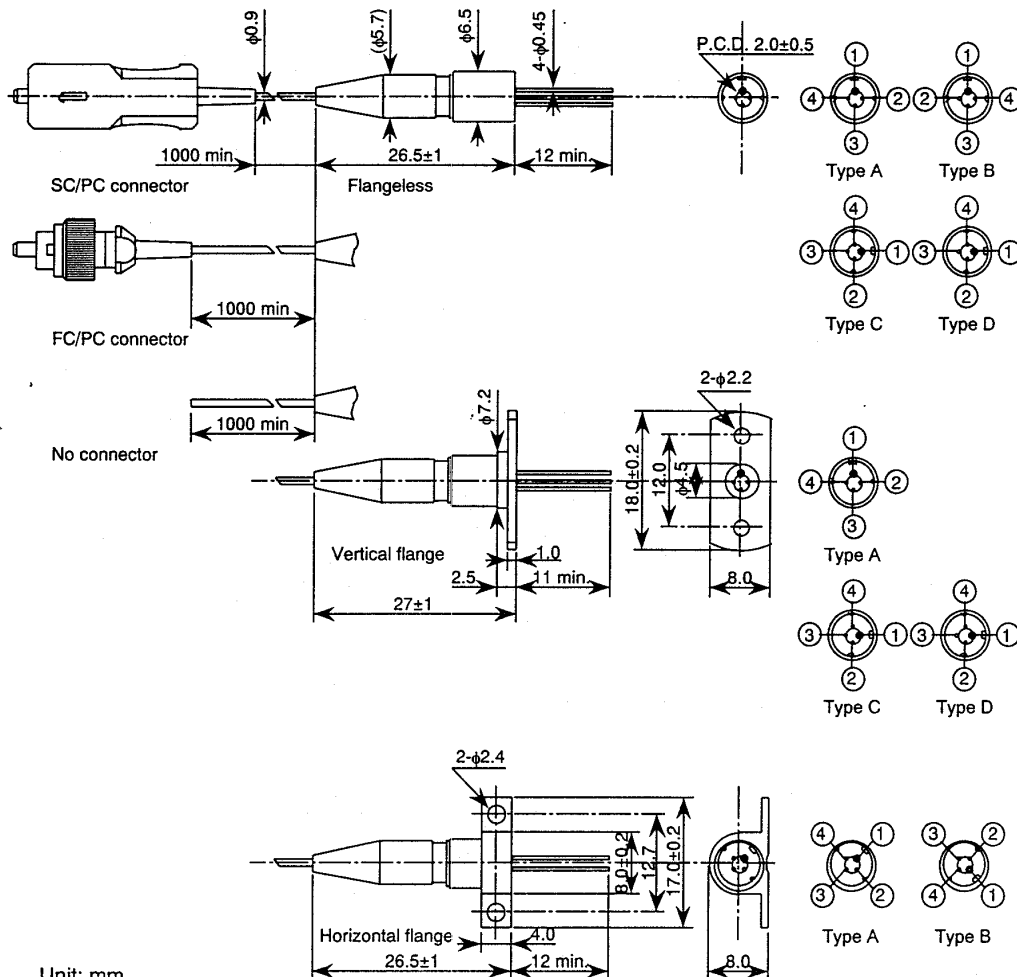

Unit: mm

Tolerance: $\pm 0.1 \text{ mm}$, unless otherwise noted

Sumitomo Electric Industries, Ltd.

Part No.: SLT3000 Series

Document No.: HUW9824040-01C

Date of issue: April 5, 2000

8. For More Information

U.S.A.

Sumitomo Electric Lightwave Corp.
78 Alexander Drive
Research Triangle Park, NC 27709
U.S.A.
Tel. (919)541-8100
Fax. (919)541-8376
www.sumitomoelectric.com
info@sumitomoelectric.com

Europe

Sumitomo Electric Europe Ltd.
Unit 11, Magnolia House
Spring Villa Park, Spring Villa Road
Edgware, Middlesex, HA8 7EB
United Kingdom
Tel. (181)905-6160
Fax. (181)905-6195

Japan

Sumitomo Electric Industries, Ltd.
(International Business Division
3-12, Moto-Akasaka 1-chome
Minato-ku Tokyo 107
Japan
Tel. (03)3423-5771
Fax.(03)3423-5099
www.sei.co.jp/Electro-optic/index_e.html