



Technical Specification
of
1.3 μ m MQW-DFB Laser Diode Module
for CATV Return-Path Application
SLV4260 Series



1. General

SLV4260 Series are 1.3 μ m InGaAsP/InP MQW-DFB laser diode modules designed for fiber optic CATV return path applications. These modules are ideally suitable for high capacity transmission including several video channels. A laser diode is mounted into a coaxial package integrated with a single mode fiber pigtail a single stage isolator and an InGaAs monitor PD.

2. Package dimension and pin assignment (See attached appendix.)

3. Absolute maximum ratings (Tc= +25°C, unless otherwise noted.)

Parameter	Symbol	Ratings	Unit
Storage temperature	Tst	-40 ~ +90	°C
Operating case temperature	Top	-20 ~ +85	°C
Forward current (LD)	IfL	150	mA
Reverse voltage (LD)	VrL	2	V
Reverse voltage PD	VrP	15	V
Reverse current PD	IrP	2	mA
Soldering temperature <10sec.	Stemp	260	°C

4. Electrical and optical characteristics (Pf=1 mW, Tc=+25°C, unless otherwise noted.)

Parameter	Symbol	Condition	Min.	T .	Max.	Unit
Threshold current	Ith	CW	-	10	15	mA
		CW, Tc=-20~+85°C	-	-	45	
Operating current	If	CW	-	18	45	mA
		CW, Tc=-20~+85°C	-	-	80	
Operating voltage	Vf	CW, Tc=-20~+85°C	-	-	1.5	V
Slope efficiency	Se	CW, Average(Ith to Ith+20mA)	0.07	-	-	mW/mA
Thermal slope efficiency	TSe	CW, Se(Tc)/Se(25°C) Tc=-20~+85°C	0.5	-	1.5	-
Peak wavelength	λ_p	CW	1300	1310	1320	nm
		CW, Tc=-20~+85°C	1290	-	1330	
Side-mode suppression ratio	SSR	CW, Tc=-20~+85°C	30	-	-	dB
Tracking error	ΔPf	Im hold(@Pf=1 mW(25°C)) CW, Tc=-20~+85°C	-1.0	-	1.0	dB
Passband flatness	-	peak to peak, f=5~200MHz	-	-	1.0	dB
Second order inter-modulation distortion	IMD2	OMI=11%, (*1)	-	-55	-	dBc
Third order inter-modulation distortion	IMD3	OMI=11%, (*1)	-	-60	-	dBc
Spurious noise with carrier ON	SNon	OMI=11 %, (*2)	-	-50	-	dBc
Spurious noise with carrier OFF	SNoFF	OMI=0%, (*2)	-	-42	-	dBc
Relative intensity noise	RIN	CW, Tc=-20~+85°C, (*3)	-	-145	-	dB/Hz
Monitor current	Im	CW, VrP=5V, Tc=-20~+85°C	50	-	1500	μ A
Monitor dark current	Id	VrP=5V	-	1	10	nA
Monitor capacitance	C	VrP=5V, f=1 MHz	-	-	10	pF

Note: *1. Optical loss=6dB, 2tone (13MHz, 19MHz)

*2. Optical loss=6dB, Modulation signal=19MHz, f=5--85MHz, Res. B.W.=100kHz,

Video B.W.=30kHz, Hold time=30sec.

Using high gain optical receiver with responsivity of 90-100A/W

Since spurious noise is strongly dependent on an optical receiver, cross check is strongly recommended.

*3. Zero link loss, ORL s-50dB, f=5--200MHz

5. Fiber pigtail specification

Parameter	Min.	Typ.	Max.	Unit
Type	Single Mode			-
Mode field diameter@1310nm	8.5	9.5	10.5	μ m
Cladding diameter	122	125	128	μ m
Outer jacket diameter	0.8	0.9	1.0	mm
Bending radius	30	-	-	mm

6. Ordering information

Part number	Pin assignment	Connector type	Flange type (hole pitch)
SLV4260-UP	Type A	SC/Ultra PC	Vertical (12.0mm)
SLV4260-US			Horizontal (12.7mm)
SLV4260-QS		SC/Angled PC	Horizontal (12.7mm)
SLV4260-XP		No connector	Vertical (12.0mm)

7. Precaution

- (1) Radiation emitted by laser devices can be dangerous to the eyes. Avoid eye or skin exposure to direct or scattered radiation.
- (2) The modules should be handled in the same manner as ordinary semiconductor devices to prevent the electro-static damages. For safe keeping and carrying, the modules should be packaged with ESD proof material. To assemble the modules on PCB, the workbench, the soldering iron and the human body should be grounded.
- (3) The stress to the fiber pigtail may cause the damage on the performance. The fiber pigtail may snap off by dropping the module.
- (4) Please pay special attention to the atmosphere condition because the dew on the module may cause some electrical damage
- (5) Under such a strong vibration environment as in automobile, the performance and reliability are not guaranteed.

Appendix

Part No.: SLV426□-□□/□□□


(Customize code)

Code	Connector type	Code	Flange type	Code	Pin assignment	Pin No.	Pin function for typeA typeB
Q	SC/Angled PC	N	Flangeless	0	Type A	1	LD anode (CASE)
U	SC/Ultra PC	P	Vertical (12.0mm)	1	Type B	2	LD cathode
V	FC/Ultra PC	S	Horizontal (12.7mm)			3	PD cathode
X	No connector	X	(Customize)			4	PD anode

Connector type

Flange type

Pin assignment

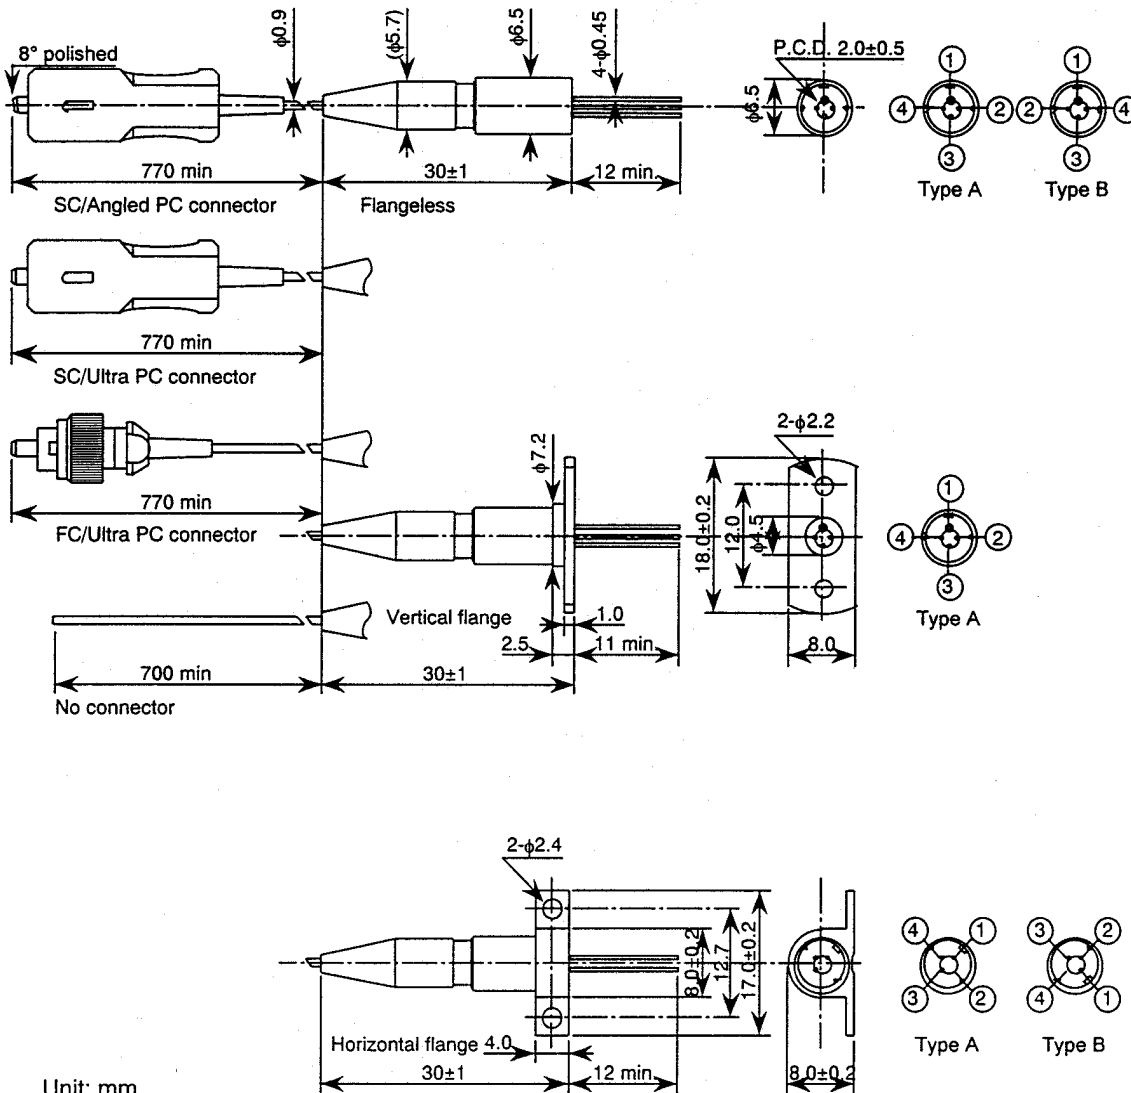

Unit: mm

Tolerance: ±0.1mm, unless otherwise noted

8. For More Information

U.S.A.

Sumitomo Electric Lightwave Corp.

78 Alexander Drive, Research Triangle Park, NC, 27709

U.S.A.

Tel. (919) 541-8100

Fax. (919) 541-8376

E-mail: info@sumitomoelectric.com

URL: <http://www.sumitomoelectric.com>

Europe

Sumitomo Electric Europe Ltd.

220 Centennial Park, Centennial Avenue, Elstree, Herts, WD6 3SL

United Kingdom

Tel. (020) 8953-8118

Fax. (020) 8207-5950

Japan

Sumitomo Electric Industries, Ltd. (International Business Division)

3-12, Moto-Akasaka 1-chome, Minato-ku Tokyo, 107-8468

Japan

Tel. (03) 3423-5771

Fax. (03) 3423-5099

E-mail: product_info@yfocs.sei.co.jp

URL: <http://www.sei.co.jp/Electro-optic/index-e.html>