


SDLO

2500 SERIES

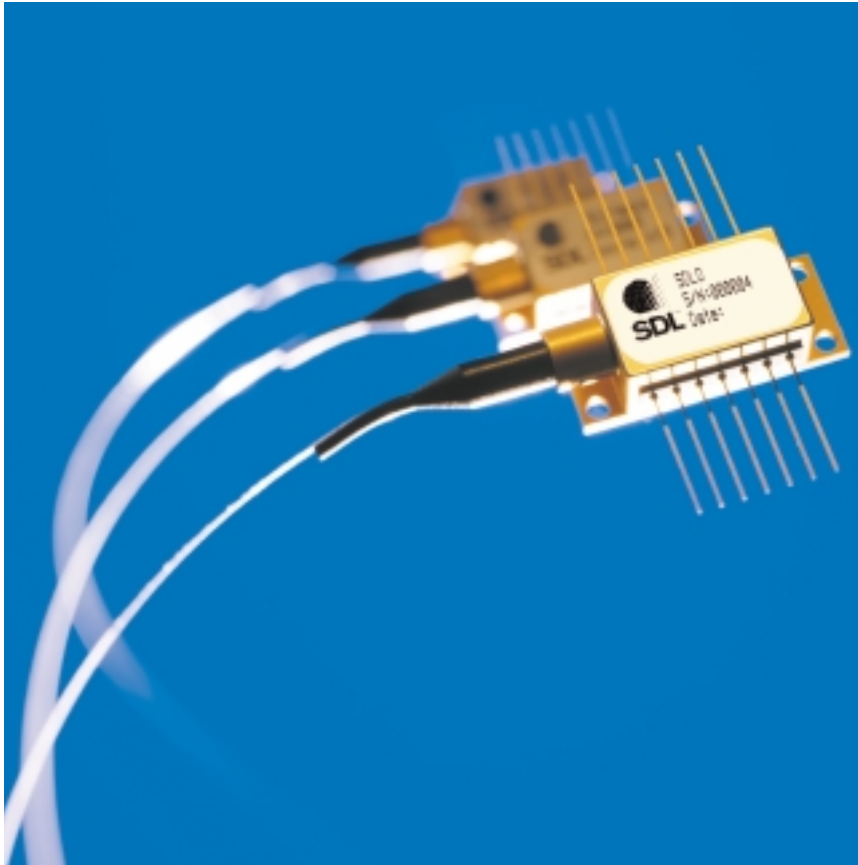

FEATURES

- *Fiber Bragg grating stabilized*
- *High kink-free powers to 170 mW*
- *Wavelength selection available*
- *Superior tracking error and tracking ratio*
- *Integrated TEC and thermistor*

APPLICATIONS

- *DWDM EDFAs*
- *High bit rate, high channel count EDFAs*
- *CATV distribution*

High power fiber Bragg grating stabilized 980 nm pump modules

The SDLO-2500 Series 980nm pump module is currently deployed in many of today's DWDM systems and CATV distribution systems. This module has proven reliability with more than 100 million field deployed hours of operation.

The SDLO-2500 Series pump module uses fiber Bragg grating stabilization to "lock" the emission wavelength and provides a noise-free narrow band spectrum even under changes in temperature, drive current and optical feedback.



Absolute Maximum Ratings

Parameter	Condition	Min	Max	Unit
Laser Diode				
Forward Current			500	mA
Forward Current Transient	1μs max		1	A
Reverse Voltage			4.5	V
Reverse Current			20	uA
Monitor Photodiode				
Reverse Current			5E-9	A
Reverse Voltage			20	V
MPD Forward Current			5	mA
Thermistor				
Voltage			5	V
Current			2	mA
Thermoelectric Cooler				
Voltage			4	V
Current			2.5	A
Package				
Storage Temperature		-40	+75	°C
Operating Temperature		-20	+70	°C
Fiber Pigtail				
Fiber Temperature		-40	+85	°C
Tensile Stress			5	N
Bend Radius			12.5	mm

Operating Powers

Product Number	Operating Power P_{op} (mW)	Maximum Operating Current I_{op} (mA)	Maximum Kink-Free Power P_{max} (mW)	Maximum Kink-Free Current I_{max} (mA)
SDLO-2564-80	70	230	80	250
SDLO-2564-90	80	230	90	250
SDLO-2564-100	90	230	100	250
SDLO-2564-110	100	240	110	260
SDLO-2564-125	115	250	125	280
SDLO-2564-130	120	270	130	290
SDLO-2564-135	120	270	135	300
SDLO-2564-140	125	280	140	310
SDLO-2564-145	130	290	145	320
SDLO-2564-150	135	300	150	330
SDLO-2564-155	140	310	155	340
SDLO-2564-160	145	320	160	350
SDLO-2564-165	150	330	165	360
SDLO-2564-170	150	330	170	370

Electro-Optical Performance

Parameter	Symbol	Test Condition	Value		Units
			Min.	Max.	
Spectrum					
Peak Wavelength	λ_c	(see Note 1)	974	985	nm
Power in Band	P_{band}	$P_{op}<P_f<P_{max}$	90		%
Spectral Shift w/temperature	$\Delta\lambda/\Delta^{\circ}T$		-	0.02	nm/ $^{\circ}C$
Spectrum Stability	$\Delta\lambda/\Delta t$	25°C, I_{max} , t = 60 seconds		0.1	nm
Optical Power Stability	$\Delta P_{opt}/\Delta t$	25°C, I_{max} , t = 60 seconds	-	0.5	%

Laser Diode

Threshold Current	I_{th}	-	-	25	mA
Slope Deviation	$\Delta L/\Delta I$	50mA < I < I_{max}	no negative slope		
Laser diode forward voltage	V_{fwdLD}	I_{max}	-	2.5	volts

Monitor Photodiode

Current	I_{mpd}		50	-	μA
---------	-----------	--	----	---	----

Thermoelectric Cooler Operation

TEC voltage	V_{TEC}	$\Delta T = 45^\circ\text{C}$, I_{max}	-	2.5	volts
TEC current	I_{TEC}	$\Delta T = 45^\circ\text{C}$, I_{max}	-	1.5	amps
Thermistor resistance	R_{therm}		9.5	10.5	KΩ


Parameter	Specification	Units
Fiber Pigtail Specifications		
Type	SM	-
Mode-field Diameter	6.5 ±1	μm
Cladding Diameter	125 ±2	μm
Jacket Diameter	250	μm

Notes

- Wavelength selection available
- All specifications are at BOL for an operating temperature range For $T_{case} = 0$ to 70°C and back reflection < -50 dB.


Outline Drawing

Dimensions in millimeters except where indicated

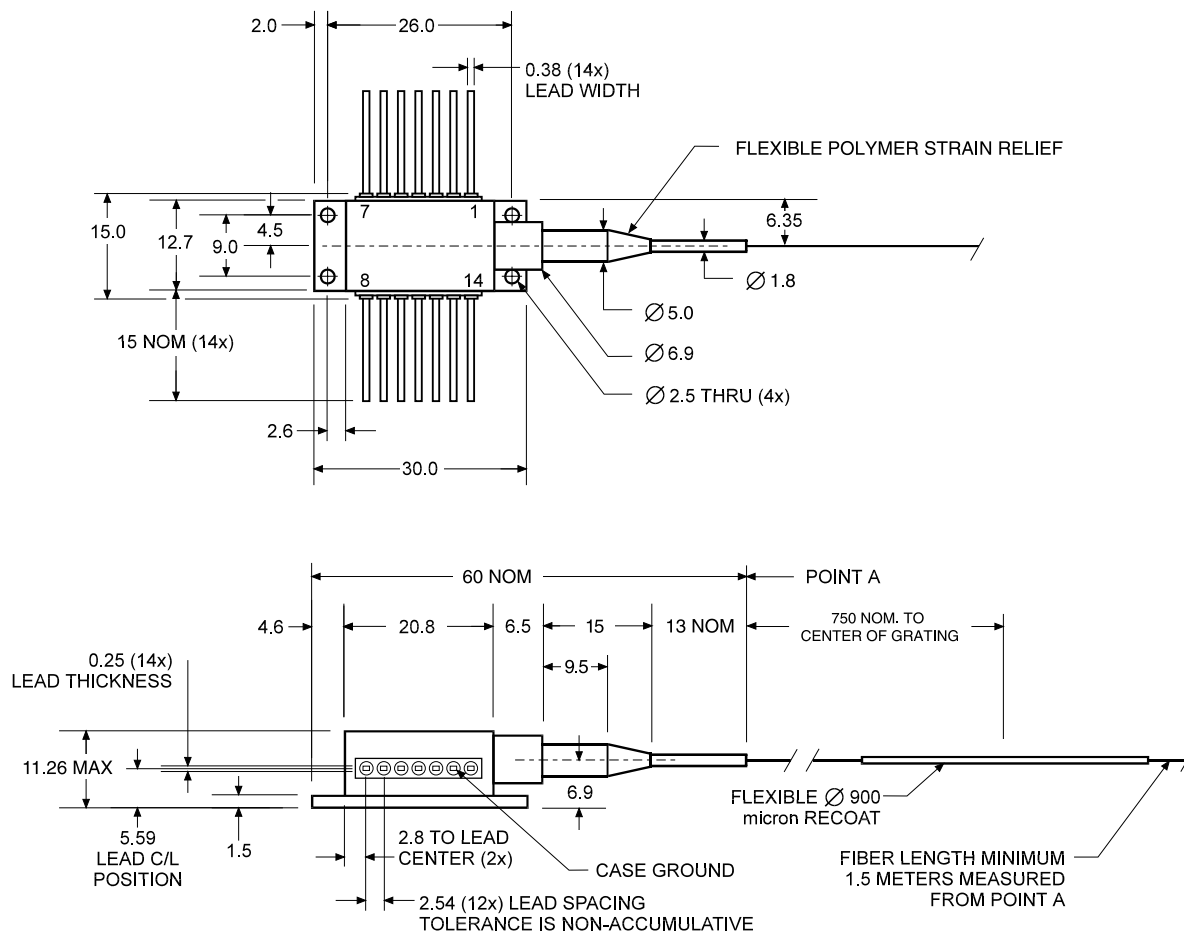

Lead Connection

Electrical Schematic
(Package Viewed From Top)

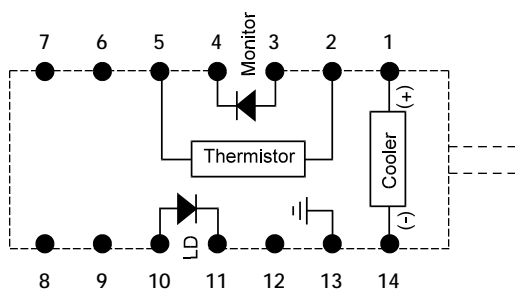

Lead Connections

- 1 Cooler (+)
- 2 Thermistor
- 3 Monitor PD Anode
- 4 Monitor PD Cathode
- 5 Thermistor
- 6 N/C
- 7 N/C
- 8 N/C
- 9 N/C
- 10 Laser Anode
- 11 Laser Cathode
- 12 N/C
- 13 Case Ground
- 14 Cooler (-)

User Safety

Safety and Operating Considerations

The laser light emitted from this laser diode is invisible and may be harmful to the human eye. Avoid looking directly into the fiber when the device is in operation.

CAUTION: THE USE OF OPTICAL INSTRUMENTS WITH THIS PRODUCT WILL INCREASE EYE HAZARD.

Operating the laser diode outside of its maximum ratings may cause device failure or a safety hazard. Power supplies used with the component must be employed such that the maximum peak optical power cannot be exceeded.

CW laser diodes may be damaged by excessive drive current or switching transients. When using power supplies, the laser diode should be connected with the main power on and the output voltage at zero. The current should be increased slowly while monitoring the laser diode output power and the drive current.

Careful attention to heatsinking and proper mounting of this device is required to insure specified performance over its operating life. To maximize thermal transfer to the heatsink, the heatsink mounting surface must be flat to within .001" and the mounting screws must be torqued down to 1.5 in.-lb.

ESD PROTECTION — Electro-static discharge is the primary cause of unexpected laser diode failure. Take extreme precaution to prevent ESD. Use wrist straps, grounded work surfaces, and rigorous anti-static techniques when handling laser diodes.

21 CFR 1040.10 Compliance

Because of the small size of these devices, each of the labels shown is attached to the individual shipping container. They are illustrated here to comply with 21 CFR 1040.10 as applicable under the radiations control for health and safety act of 1968.

SERIAL NUMBER IDENTIFICATION LABEL

Model Number SDLO-2000	 SDL	SDL Optics, Inc. 2261A Keating Cross Rd. Saanichton, BC Canada V8M 2A5 TEL: 250-544-2244 FAX: 250-544-2225	Date: <input type="text"/>	Serial # 81592
---	----------------	---	--------------------------------------	-------------------------------------

OUTPUT POWER AND LASER EMISSION INDICATOR LABEL

<div>DANGER</div> <div> INVISIBLE LASER RADIATION— AVOID DIRECT EXPOSURE TO BEAM PEAK POWER 500 mW WAVELENGTH 630 – 1,550 nm CAUTION — Handle with care. Easily damaged by electrostatic discharge This product complies with 21 CFR Subchapter J CLASS 3B LASER PRODUCT</div>	<div>VISIBLE/ INVISIBLE LASER DIODE</div> <div> ← AVOID EXPOSURE</div> <div>visible/invisible radiation emitted from fiber end or fiber receptacle</div>
---	--



SDL, Inc.
80 Rose Orchard Way
San Jose, CA 95134-1365
Tel: 408-943-9411
Fax: 408-943-1430
E-mail: sales@sdli.com

And for the latest information on all SDL products please visit our web site:

www.sdli.com

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. SDL reserves the right to change at any time without notice the design, specifications, function, fit or form of its products described herein, including withdraw at any time of a product herein as offered for sale. SDL makes no representations that the products herein are free from any intellectual property claims of others.