

Part Number* Relay Description

CA00HD	1A, 250 Vrms, AC Solid State Relay with dual in-line terminals.
SCA00HD	1A, 250 Vrms, AC Solid State Relay with gull wing surface mount terminals.

* The Y suffix denotes parameters tested to MIL-PRF-28750 test methods.
The W suffix denotes parameters tested to Teledyne specifications.



ELECTRICAL SPECIFICATIONS

(-55°C TO +125°C UNLESS OTHERWISE SPECIFIED)

INPUT (CONTROL) CHARACTERISTICS

2 Terminal Configuration (See Fig. 1)	Min	Max	Units
Input Voltage	3.8	32	Vdc
Input Current (See Figure 1)			
$V_{IN} = 5 \text{ Vdc}$	13	15	mA
$V_{IN} = 32 \text{ Vdc}$	13	18	mA
Turn-Off Voltage (Guaranteed Off)		1.5	Vdc
Turn-On Voltage (Guaranteed On)	3.8		Vdc
Reverse Voltage Protection		-32	Vdc

BLOCK DIAGRAM

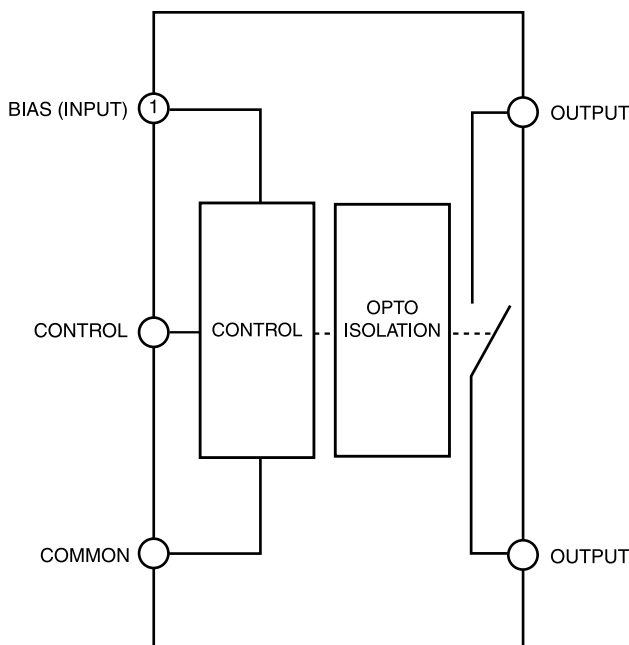

FEATURES/BENEFITS


- Optical Isolation-Isolates control elements from load transients.
- Low Zero Cross Window-Minimizes switching transients and lowers EMI. Ideal as an SCR or TRIAC driver.
- Fully Floating Output-Eliminates ground potential loops
- Meets MIL-STD-704 Requirements for Relay Outputs- Allows relay to be used in avionic systems without external transient protection.
- Buffered Control-Relay can be controlled directly from TTL or CMOS logic circuits.
- Low Profile Ceramic DIP Package- Allows high density packaging for through-hole and surface mount applications.

DESCRIPTION


The CA series is designed for printed circuit board mounting in AC power switching applications. The relay is rated for 1A at 250 Vrms from 40 to 440 Hz for resistive and reactive loads with power factors as low as 0.2. Inverse parallel SCRs are configured for zero voltage turn on. The patented circuit design assures the lowest possible EMI by reducing commutation spikes. Optical isolation allows a floating output with 1200 Vac isolation between the control (input) and load (output). This allows low level logic circuits to safely control AC loads. The low profile ceramic DIP package is hermetically sealed to withstand severe environmental conditions encountered in military and aerospace applications. This relay is available with conventional leads for through-hole PCB mounting or with gull wing leads for surface mount applications.

ENVIRONMENTAL SPECIFICATIONS


Ambient Temperature	-55° C to +125° C Operating -55° C to +130° C Storage
Acceleration	5000 g

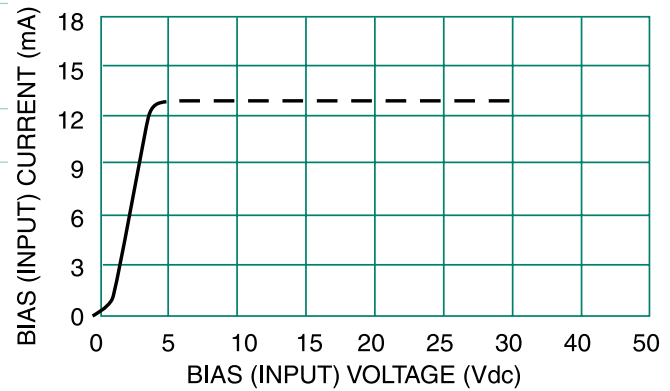


INPUT CURRENT VS VOLTAGE
FIGURE 2

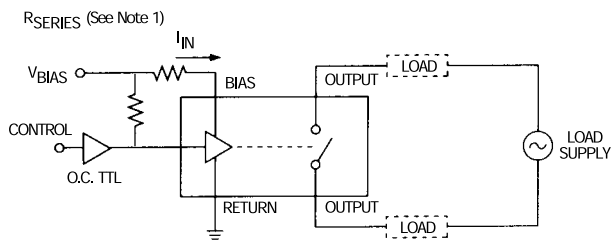

(A) OPEN COLLECTOR TTL DRIVE INPUT CONFIGURATION

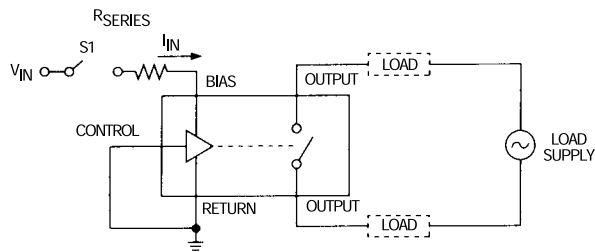


(B) DIRECT DRIVE INPUT CONFIGURATION

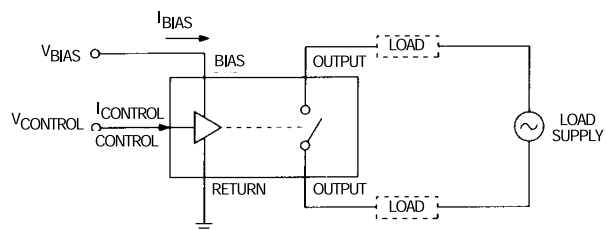


(C) BUFFERED INPUT CONFIGURATION

WIRING CONFIGURATIONS
FIGURE 1 (SEE NOTE 2)

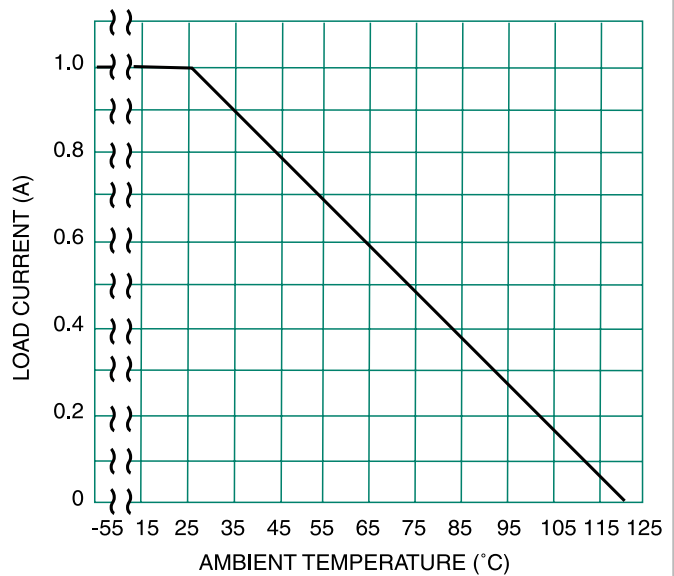


LOAD CURRENT DERATING CURVE
FIGURE 3

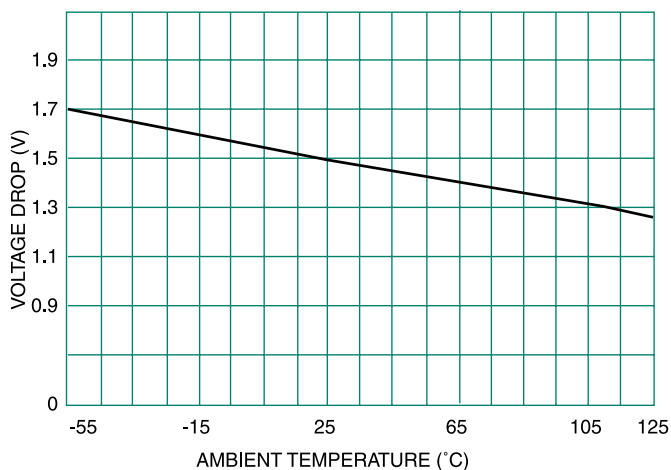

**MAXIMUM VOLTAGE DROP VS AMBIENT
TEMPERATURE AT $I_{L \text{ RATED}}$**

FIGURE 4

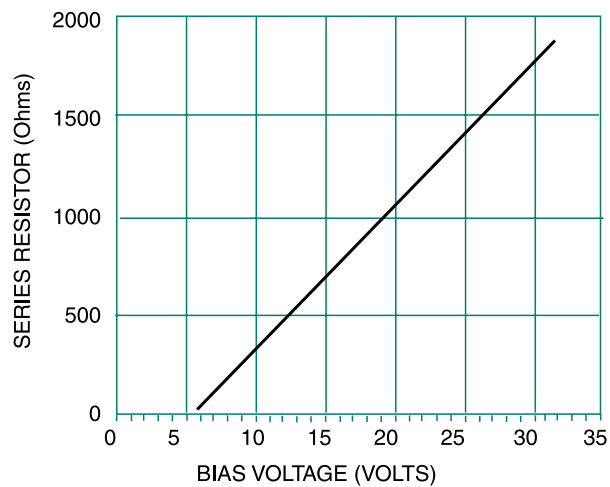

SERIES LIMIT BIAS RESISTOR VS BIAS VOLTAGE

FIGURE 5 (SEE NOTE 3)

NOTES:

1. To increase the dV/dt characteristic to 200V/ μ s, use an RC snubber across the output terminals with $R = 100$ and $C = 0.01 \mu F$.
2. Control input is compatible with CMOS or open collector TTL (with pull up resistor).
3. For bias voltages above 6V, a series resistor is required. Use a standard resistor value equal to or less than the value found from Figure 5.
4. Output may temporarily lose blocking capability during and after a surge, until T_J falls below maximum.
5. Input transition should be ≤ 1 msec duration and input drive should be "bounceless contact" type.
6. Unless otherwise noted, the input voltage for functional tests shall be 5 Vdc.
7. Relay mounted on a printed circuit board.