


Optoelectronic Components

1310nm SEMICONDUCTOR OPTICAL AMPLIFIER MODULE

SAM3S Series

Based on Axon's proprietary MOCVD process, these semiconductor optical amplifiers (SOA) achieve a peak gain of up to 30dB and a 3dB passband of up to 60nm. A strain-compensated structure provides low polarization dependence. Hermetic packaging results in a robust and highly reliable module.

These SOA modules are well suited to all optical network applications providing functions such as optical amplification, switching and wavelength conversion/routing.

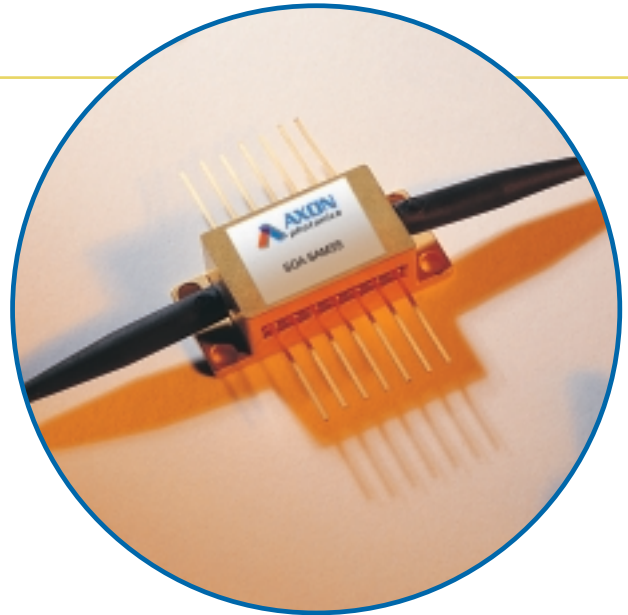

Features

- Up to 60nm wide 3dB bandwidth
- Bit-rate transparent
- Low polarization sensitivity
- Typical gain 25dB
- Up to 30dB gain available
- Ultra-fast <1ns switch time
- Reliable hermetic package

Applications

- Optical amplification or regeneration
- Optical switching
- Optical add/drop multiplexing
- Wavelength routing
- Wavelength conversion
- Broadband light source

Options

- 14 butterfly package shown
- 14-pin DIL package available
- 1550nm SOA available options

PARAMETER	MIN	TYP	MAX	UNITS	COMMENTS
Peak Wavelength	1280		1340	nm	
Gain	20	25		dB	Pin = -25dBm
Polarization Dependent Gain		< 1.0	2.0	dB	
Noise Figure		8	12	dB	
Saturation Output Power	4	10		dBm	Drive current = 200mA
3dB Bandwidth	40			nm	Wider passband available Depends on application
Switching Time		< 1	2	ns	
Drive Current		100	200	mA	Absolute max = 250mA
TEC Drive Voltage			4	V	
TEC Drive Current			1.5	A	
Thermistor Resistance		10		kΩ	@ 25°C
Operating Temperature	-20		70	°C	

Corporate Office


2933 Bayview Drive
Fremont, CA 94538
p: 510.354.6700
f: 510.438.5299
www.axonphotonics.com

East Coast Office

6131A Kellers Church Road
Pipersville, PA 18947
p: 215.766.7747
f: 215.766.1946


sales@axonphotonics.com
www.axonphotonics.com

Schematic of 14-Pin Butterfly Package (Units:mm)

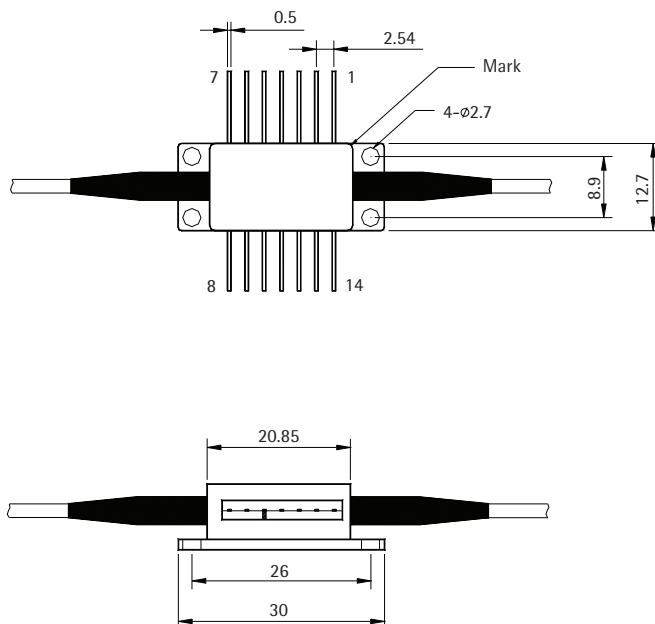

PIN	DESCRIPTION
1	TEC +
2	NC
3	Thermistor
4	Thermistor
5	SOA +
6	NC
7	NC
8	NC
9	NC
10	SOA +
11	SOA -
12	NC
13	NC

Schematic of 14-Pin DIL Package (Units:mm)

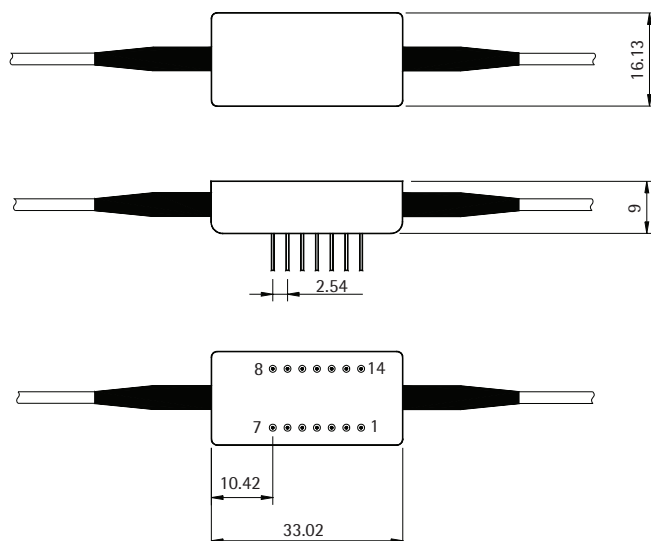

PIN	DESCRIPTION
1	TEC +
2	NC
3	SOA + (GND.)
4	Thermistor
5	Thermistor
6	NC
7	NC
8	NC
9	NC
10	SOA + (GND.)
11	SOA -
12	NC
13	NC
14	TEC -