



SF2-LP11x Small Form Factor Optical Fiber Transceiver

3.3 Volt, LVPECL, 1300nm LED for Multimode Optical Fiber at up to 200 MBaud

ORDERING INFORMATION

Application	Description	Temp. Range	Part Number
Fast Ethernet ESCON ATM	100Base-FX X3.296-1997 OC-3	0 to +70° C	SF2-LP11
Fast Ethernet ESCON ATM	100Base-FX X3.296-1997 OC-3	-40 to +85° C	SF2-LP11H

FEATURES


- MSA SFF 2 x 5 optical fiber transceiver - LC receptacle
- Optimized for 62.5 or 50/125μ multimode optical fiber
- Compatible with solder and aqueous wash processes
- Meets PCI Mezzanine Card Maximum height requirements
- Overall metal shield for enhanced EMI performance
- Full compliance to the IEEE, ANSI and ATM requirements
- Differential LVPECL inputs and outputs
- Single +3.3 V power supply per port

APPLICATIONS

The SF2-LP11x multimode glass optical fiber transceivers provide low profile, cost effective solutions for high data rate multimode (up to 200 Megabaud, up to 2.0 Km) optical fiber data links with a duplex LC connector interface.

These transceivers are fully compliant with IEEE, ATM and ANSI standards but can be used for any other data communications purpose within their operating parameters.

BLOCK DIAGRAM

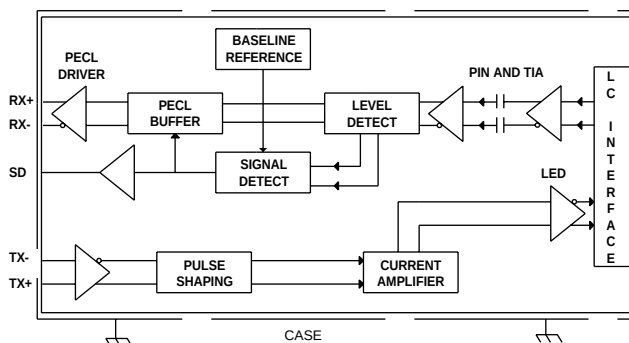

DESCRIPTION

The SF2-LP11x fiber optic transceivers consist of transmitter and receiver functions combined in a multisourced 2x5 SFF transceiver module. The optical transmitter is a high output 1300nm LED. The transmitter input lines are driven with differential LVPECL signals applied to the Transmit (**TX+** and **TX-**) pins. These signals are internally converted to a suitable modulation current by a CMOS integrated circuit.

The optical receivers consist of PIN and Preamplifier assemblies and CMOS limiting post-amplifier integrated circuits. Outputs from the receivers consist of differential LVPECL data signals on the Receive (**RX+** and **RX-**) pins and a single ended LVPECL signal detect function on the Signal Detect (**SD**) pin.

SF2-LP11x Small Form Factor Optical Fiber Transceiver

3.3 Volt, LVPECL, 1300nm LED for Multimode

Optical Fiber at up to 200 MBaud

ABSOLUTE MAXIMUM RATINGS

Absolute maximum limits mean that no catastrophic damage will occur if the product is subjected to these ratings for short periods, provided each limiting parameter is in isolation and all other parameters have values within the performance specification. It should not be assumed that limiting values of more than one parameter can be applied to the product at the same time.

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Storage Temperature	T_S	-55		+100	° C
Lead Soldering Temperature	T_{SOLD}			+260	° C
Lead Soldering Time	t_{SOLD}			10	Seconds
Supply Voltage	V_{CC}	-0.5		3.6	V
Data Input Voltage	V_I	-0.5		V_{CC}	V
Differential Input Voltage (p-p)	V_D			2.0	V
Output Current	I_O			50	mA

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Operating Temp. Limit - SF2-LP11	T_A	0		+70	° C
Operating Temp. Limit - SF2-LP11H	T_A	-40		+85	° C
Supply Voltage	V_{CC}	3.135		3.465	V
Data Input Voltage - Low	$V_{IL} - V_{CC}$	-1.810		-1.475	V
Data Input Voltage - High	$V_{IH} - V_{CC}$	-1.165		-0.880	V
Data Output Load	R_L		50		Ohms
Differential Input Voltage (p-p)	V_D	0.800			V

SF2-LP11x Small Form Factor Optical Fiber Transceiver

3.3 Volt, LVPECL, 1300nm LED for Multimode

Optical Fiber at up to 200 MBaud

TRANSMITTERS

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Baud Rate		10		200	MBaud
Optical Output Power	P_O	-19		-14	dBm
Optical Output Wavelength	λ_{OUT}	1270	1320	1380	nm
Extinction Ratio	ER		-47	-40	dB
Optical Rise Time (10%-90%)	t_R	0.6	1.5	3.0	nS
Optical Fall Time (10%-90%)	t_F	0.6	2.0	3.0	nS
Duty Cycle Distortion	t_{DCD}		<0.1	0.6	nS
Data Dependent Jitter	t_{DDJ}		<0.1	0.7	nS

RECEIVERS

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Baud Rate		10		200	MBaud
Optical Wavelength	λ_{IN}	1270		1380	nm
Optical Sensitivity	P_I		-35	-32	dBm
Input Duty Cycle Distortion	t_{DCD}			1.0	nS
Input Data Dependent Jitter	t_{DDJ}			0.76	nS
Signal Detect Assert Time			<10	100	μ S
Signal Detect Deassert Time			<10	350	μ S


SF2-LP11x Small Form Factor Optical Fiber Transceiver

3.3 Volt, LVPECL, 1300nm LED for Multimode

Optical Fiber at up to 200 MBaud

TRANSCEIVER PRINTED CIRCUIT BOARD LAYOUT PER 1997 MULTISOURCE AGREEMENT

Component Side Shown
Dimensions Are Shown As: $\frac{\text{mm}}{\text{inches}}$

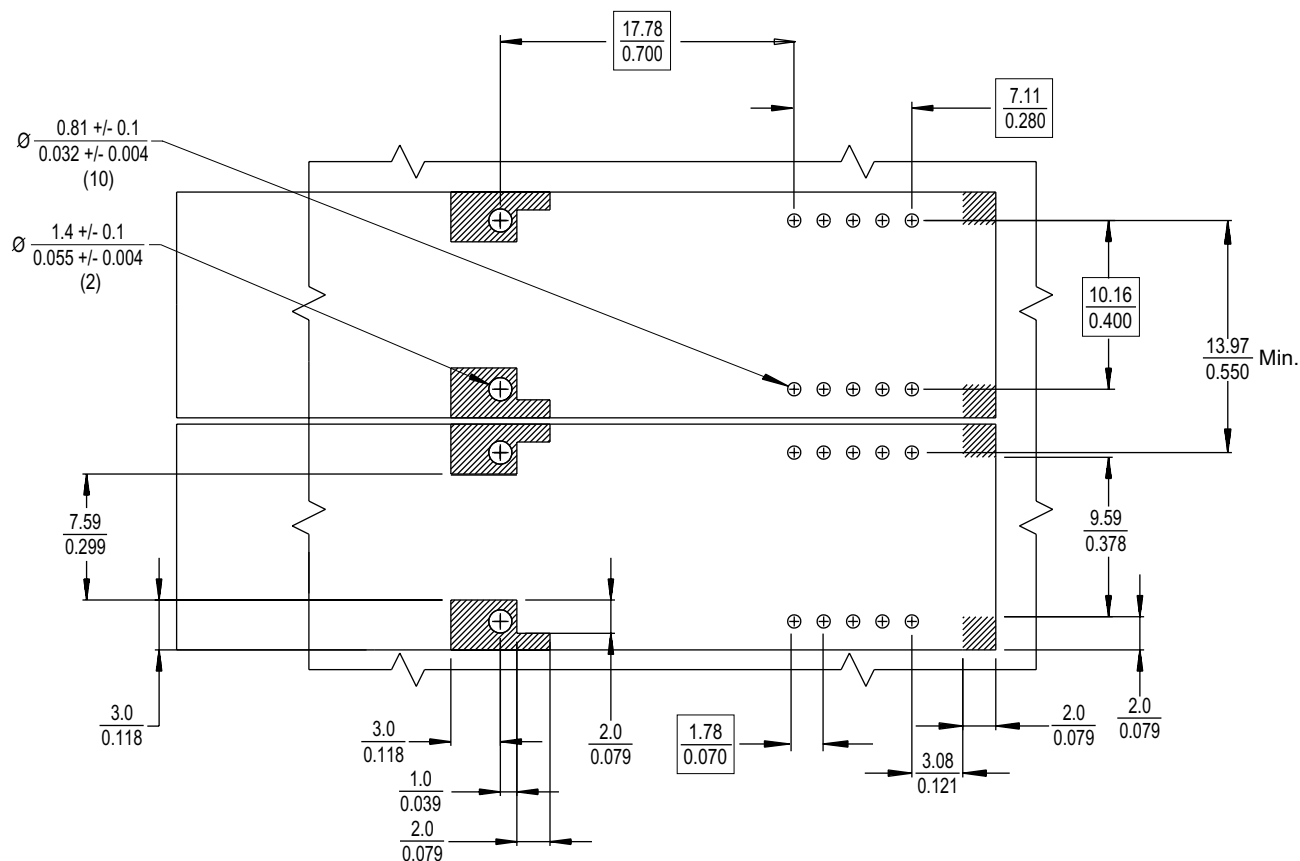

CROSS-HATCHED AREAS SHOULD HAVE NO SIGNAL TRACES ON THE TOP LAYER

SF2-LP11x Small Form Factor Optical Fiber Transceiver

3.3 Volt, LVPECL, 1300nm LED for Multimode


Optical Fiber at up to 200 MBaud

REGULATORY COMPLIANCE

Requirement	Feature	Condition	Notes
MIL-STD-883-3015.7	ESD	Class II	2200V
IEC-801-2	ESD	Human Body Model	25KV
IEC-801-3	EMI	Immunity	>20dB
FCC	EMI	Class B	10V / M
EN 55022 (CISPR 22A)	EMI	Class B	>20dB
IEC-825 issue 1993-11	Eye Safety	Class 1	



UL / CSA File Number: E209124

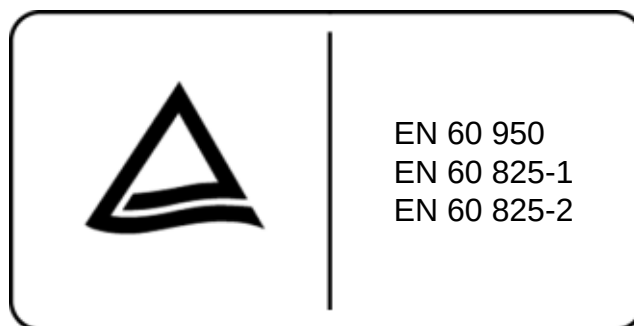


TUV File Number: R2071012

SF2-LP11x Small Form Factor Optical Fiber Transceiver

3.3 Volt, LVPECL, 1300nm LED for Multimode

Optical Fiber at up to 200 MBaud

SMALL FORM FACTOR TRANSCEIVER PIN ASSIGNMENTS

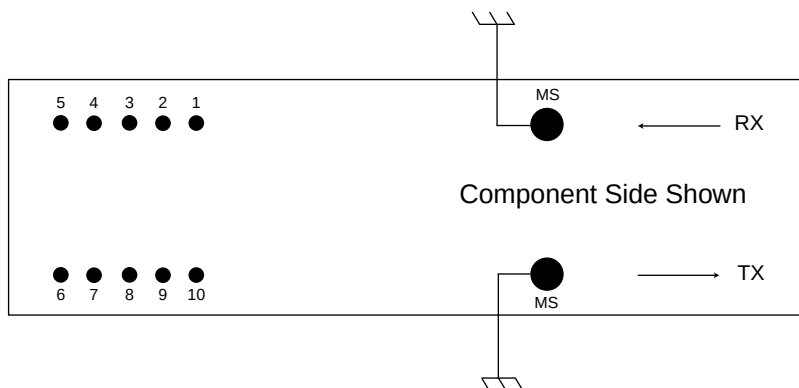


PIN FUNCTIONS

Pin Number	Symbol	Description	Logic Family
MS	MS	Mounting Studs <i>Connect to Chassis Ground</i>	N/A
1	VEEREX	Receiver Signal Ground	N/A
2	VCCR _X	Receiver Power Supply	N/A
3	SD	Signal Detect <i>Normal Operation: Logic "1" Output</i> <i>Fault Condition: Logic "0" Output</i>	LVPECL
4	RD ⁻	Receiver DATA Out	LVPECL
5	RD ⁺	Receiver DATA Out	LVPECL
6	VCCTX	Transmitter Power Supply	N/A
7	VEETX	Transmitter Signal Ground	N/A
8	N/C	N/C	N/A
9	TD ⁺	Transmitter DATA In	LVPECL
10	TD ⁻	Transmitter DATA In	LVPECL

Optical Fiber at up to 200 MBaud

For Interface To +3.3V LVPECL Circuits




SF2-LP11x Small Form Factor Optical Fiber Transceiver

3.3 Volt, LVPECL, 1300nm LED for Multimode

Optical Fiber at up to 200 MBaud

SMALL FORM FACTOR OUTLINE DIMENSIONS PER 1997 MULTISOURCE AGREEMENT

Dimensions Are Shown As: $\frac{\text{mm}}{\text{inches}}$

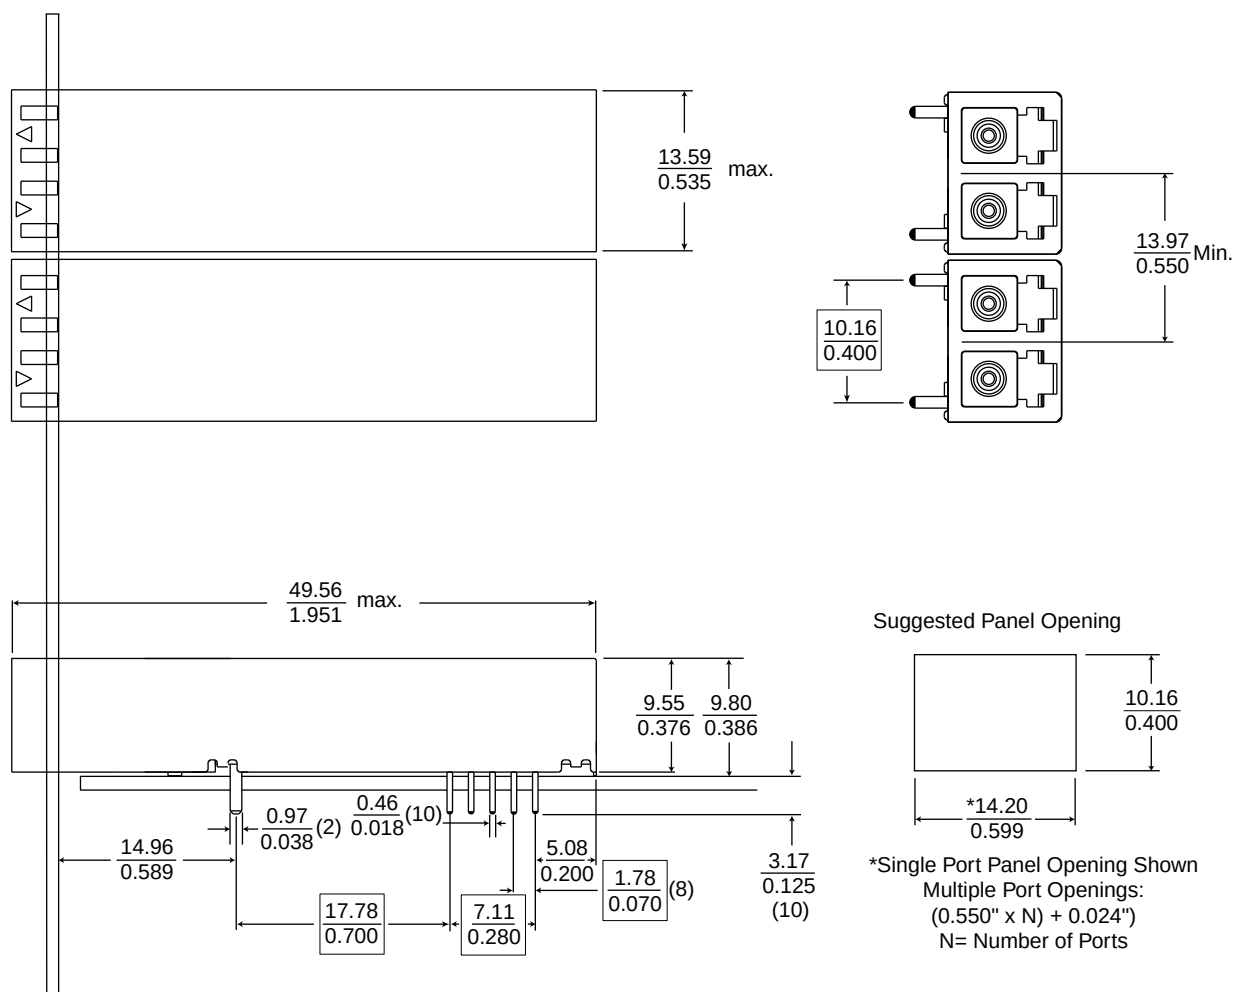

IMPORTANT NOTICE

Stratos Lightwave reserves the right to make changes to or discontinue any optical link product or service identified in this publication, without notice. Stratos Lightwave recommends that its customers to obtain the latest version of the publications to verify, before placing orders, that the information being relied on is current. Stratos Lightwave warrants performance of its optical link products to current specifications in accordance with the Stratos Lightwave standard warranty. Testing and other quality control techniques are utilized to the extent that Stratos Lightwave has determined it to be necessary to support this warranty. Specific testing of all parameters of each optical link product is not necessarily performed on all optical link products. Stratos Lightwave products are not designed for use in life support appliances, devices, or systems where malfunction of a Stratos Lightwave product can reasonably be expected to result in a personal injury. Stratos Lightwave customers using or selling optical link products for use in such applications do so at their own risk and agree to fully indemnify Stratos Lightwave for any damages resulting from such improper use or sale. Stratos Lightwave assumes no liability for Stratos Lightwave applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does Stratos Lightwave warrant or represent that a license, either expressed or implied is granted under any patent right, copyright, or intellectual property right, and makes no representations or warranties that these products are free from patent, copyright, or intellectual property rights. Applications that are described herein for any of the optical link products are for illustrative purposes only. Stratos Lightwave makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.