



SF50-005G THRU SF50-06G


5A GLASS PASSIVATED SUPER FAST RECOVERY RECTIFIER

FEATURES

- LOW POWER LOSS, HIGH EFFICIENCY
- LOW FORWARD VOLTAGE
- HIGH CURENT CAPABILITY
- HIGH SPEED SWITCHING
- HIGH RELIABILITY
- HIGH SURGE CAPABILITY
- GLASS PASSIVATED CHIP JUNCTION

MECHANICAL DATA

- CASE : MOLDED PLASTIC
- EPOXY : UL 94V-0 MOLDING COMPOUND
- LEADS : MIL-STD-202E,METHOD 208C GUARANTEED
- MOUNTING POSITION : ANY
- WEIGHT : 1.2 GRAMS

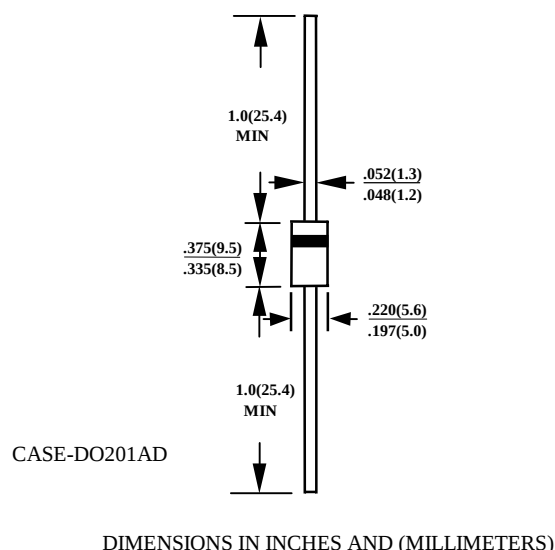

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

RATINGS AT 25°C AMBIENT TEMPERATURE UNLESS OTHERWISE SPECIFIED
SINGLE PHASE, HALF WAVE, 60 HZ, RESISTIVE OR INDUCTIVE LOAD.
FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%

RATINGS	SYMBOL	SF50-005G	SF50-01G	SF50-015G	SF50-02G	SF50-03G	SF50-04G	SF50-05G	SF50-06G	UNITS
MAXIMUM RECURRENT PEAK REVERSE VOLTAGE	V _{RRM}	50	100	150	200	300	400	500	600	V
MAXIMUM RMS VOLTAGE	V _{RMS}	35	70	105	140	210	280	350	420	V
MAXIMUM DC BLOCKING VOLTAGE	V _{DC}	50	100	150	200	300	400	500	600	V
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT .375" (9.5mm) LEAD LENGTH AT TA=55°C	I _O	5.0								A
PEAK FORWARD SURGE CURRENT, 8.3ms SINGLE HALF SINE-WAVE SUPERIMPOSED ON RATED LOAD	I _{FSM}	150								A
TYPICAL JUNCTION CAPACITANCE (NOTE 1)	C _J	50				30				PF
TYPICAL THERMAL RESISTANCE (NOTE 2)	R _{θjc}	30								°C/W
STORAGE TEMPERATURE RANGE	T _{STG}	- 55 TO + 150								°C
OPERATING TEMPERATURE RANGE	T _{OP}	- 55 TO + 150								°C

ELECTRICAL CHARACTERISTICS ($A_T T_A=25^{\circ}C$ UNLESS OTHERWISE NOTED)

CHARACTERISTICS	SYMBOL	SF50-005G	SF50-01G	SF50-015G	SF50-02G	SF50-03G	SF50-04G	SF50-05G	SF50-06G	UNITS	
MAXIMUM FORWARD VOLTAGE AT I_O DC	V_F	0.95				1.25		1.85		V	
MAXIMUM REVERSE CURRENT AT 25°C	I_R	10									μA
MAXIMUM REVERSE CURRENT AT 100°C	I_R	100									μA
MAXIMUM REVERSE RECOVERY TIME (NOTE 3)	T_{RR}	35									nS

NOTE :

1. MEASURED AT 1 MHZ AND APPLIED REVERSE VOLTAGE OF 4.0 VOLTS
2. BOTH LEADS ATTACHED TO HEATSINK 30x 30x 1t(mm) COPPER PLATE AT LEAD LENTH 5mm
3. REVERSE RECOVERY TEST CONDITIONS: $I_F=0.5A$, $I_R=1.0A$, $I_{RR}=0.25A$

RATINGS AND CHARACTERISTIC CURVE SF50-005G THRU SF50-06G

FIG. 1-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

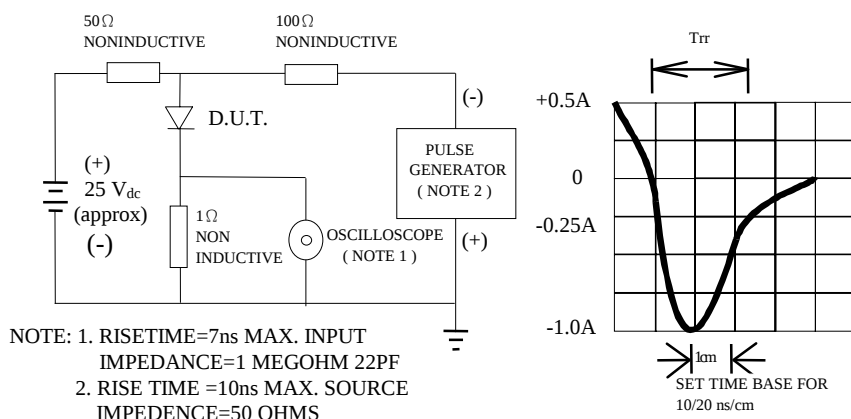


FIG. 2-TYPICAL FORWARD CURRENT DERATING CURVE

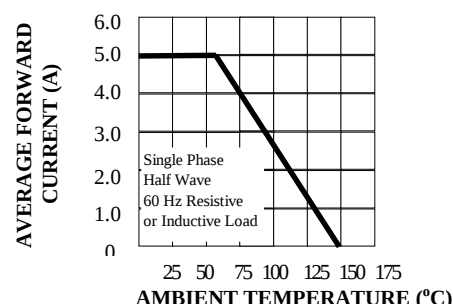


FIG. 3-TYPICAL REVERSE CHARACTERISTICS

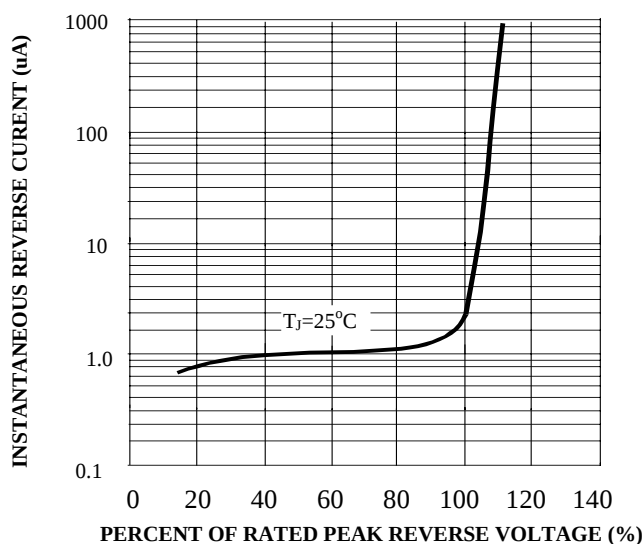


FIG. 4-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

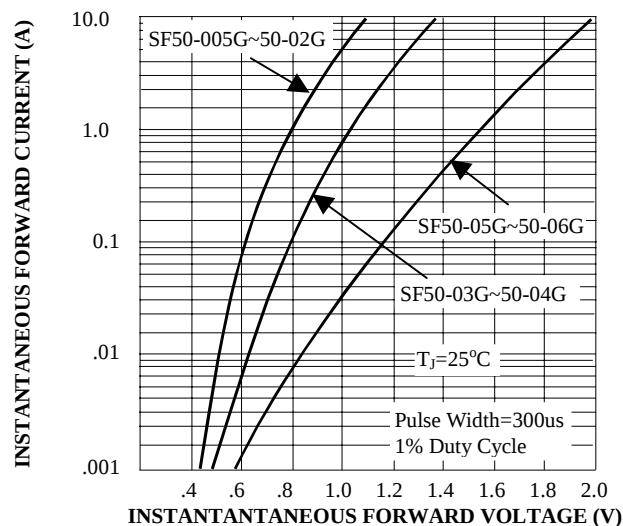


FIG. 5-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

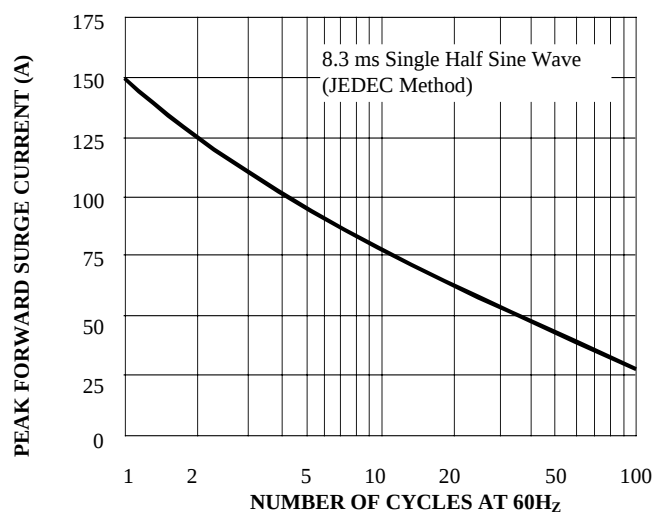


FIG. 6-TYPICAL JUNCTION CAPACITANCE

