


0.8A SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS

FEATURES

- EXTREMELY LOW VF
- LOW STORED CHARGE, MAJORITY CARRIER CONDUCTION
- LOW POWER LOSS / HIGH EFFICIENCY
- UL 94V-0 FLAME RETARDANT EPOXY MOLDING COMPOUND

MECHANICAL DATA

- CASE : TRANSFER MOLDED
- TERMINALS : SOLDERABLE PER MIL-STD-750, METHOD 2026
- POLARITY : CATHODE INDICATED BY COLOR BAND
- WEIGHT : 0.015 GRAM

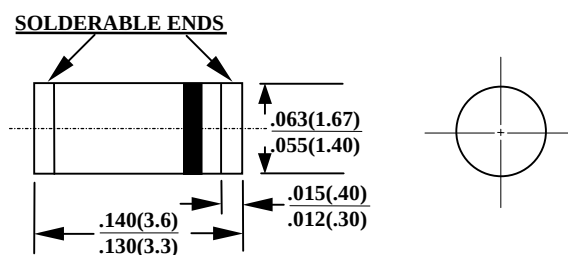

CASE-DO-213AA
(GL34)

DIMENSIONS IN INCHES AND (MILLIMETERS)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

RATINGS AT 25°C AMBIENT TEMPERATURE UNLESS OTHERWISE SPECIFIED

SINGLE PHASE, HALF WAVE, 60 HZ, RESISTIVE OR INDUCTIVE LOAD.

FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%

RATINGS	SYMBOL	SGL34-02	SGL34-03	SGL34-04	SGL34-05	SGL34-06	UNITS
MAXIMUM RECURRENT PEAK REVERSE VOLTAGE	V_{RRM}	20	30	40	50	60	V
MAXIMUM RMS VOLTAGE	V_{RMS}	14	21	28	35	42	V
MAXIMUM DC BLOCKING VOLTAGE	V_{DC}	20	30	40	50	60	V
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT AT $T_J=75^{\circ}\text{C}$	I_O	0.8					A
PEAK FORWARD SURGE CURRENT, 8.3ms SINGLE HALF SINE-WAVE SUPERIMPOSED ON RATED LOAD	I_{FSM}	10					A
TYPICAL JUNCTION CAPACITANCE (NOTE 1)	C_J	80					PF
MAXIMUM THERMAL RESISTANCE $R_{\theta JL}$ (NOTE 2)	$R_{\theta JL}$	30					$^{\circ}\text{C}/\text{W}$
$R_{\theta JA}$ (NOTE 2)	$R_{\theta JA}$	75					
STORAGE TEMPERATURE RANGE	T_{STG}	- 55 TO + 150					$^{\circ}\text{C}$
OPERATING TEMPERATURE RANGE	T_{OP}	- 55 TO + 125					$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS ($A_T T_A = 25^{\circ}\text{C}$ UNLESS OTHERWISE NOTED)

CHARACTERISTICS	SYMBOL	SGL34-02	SGL34-03	SGL34-04	SGL34-05	SGL34-06	UNITS
MAXIMUM FORWARD VOLTAGE AT 0.8A DC	V_F	0.5			0.7		V
MAXIMUM REVERSE CURRENT AT $T_J=25^{\circ}\text{C}$	I_R	0.5			10		mA
$T_J=100^{\circ}\text{C}$							

NOTE :

1. MEASURED AT 1.0 MHz AND APPLIED REVERSE VOLTAGE OF 4.0V D.C.
2. THERMAL RESISTANCE JUNCTION TO TERMINAL 6.0 mm × 6.0 mm COPPER PADS TO EACH TERMINAL

RATINGS AND CHARACTERISTIC CURVE SGL34-02 THRU SGL34-06

