



PECL / LVPECL to LVDS Translator

HIGH-PERFORMANCE PRODUCTS

ADVANCED

Description

The SK1300 is a high speed PECL / LVPECL to LVDS translator. This device is designed to support frequency rates in excess of 800 MHz utilizing low voltage differential signaling (LVDS) technology. SK1300 operates over an extended supply range of 3.0 to 5.5V which allow either PECL or LVPECL signal at its inputs based on the supply voltage range. It also provides a new alternative to high power pseudo-ECL devices for high speed point-to-point interface using LVDS type signals.

The SK1300 provides a VBB outputs for either single-ended use or as a DC bias for AC coupling to the device. The VBB output should only be used as a bias for the SK1300 as its current sink/source capability is limited. Whenever used, the VBB output should be bypassed to VCC via a 0.01 μ F capacitor.

Under open input condition, the pulldown on D and pullup and pulldown on D* will force the Q output low and Q* output high.

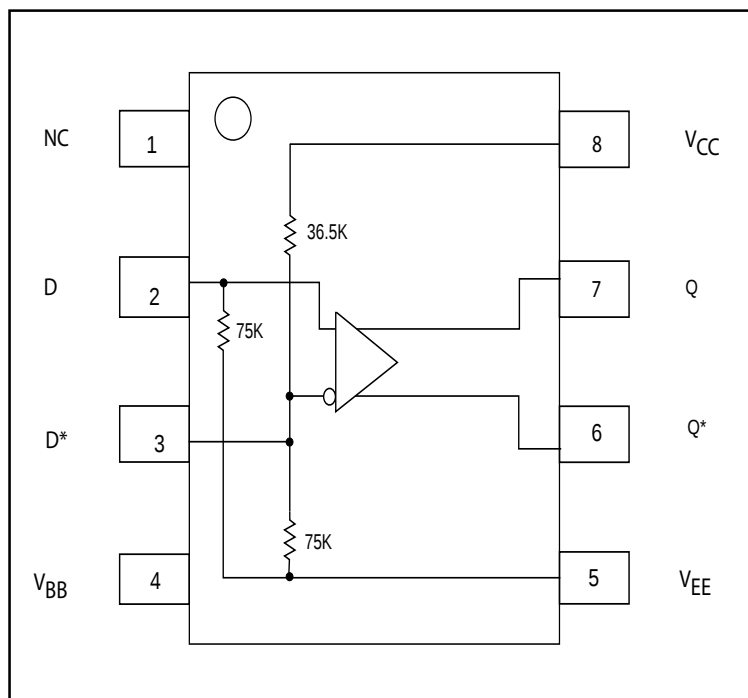
Features

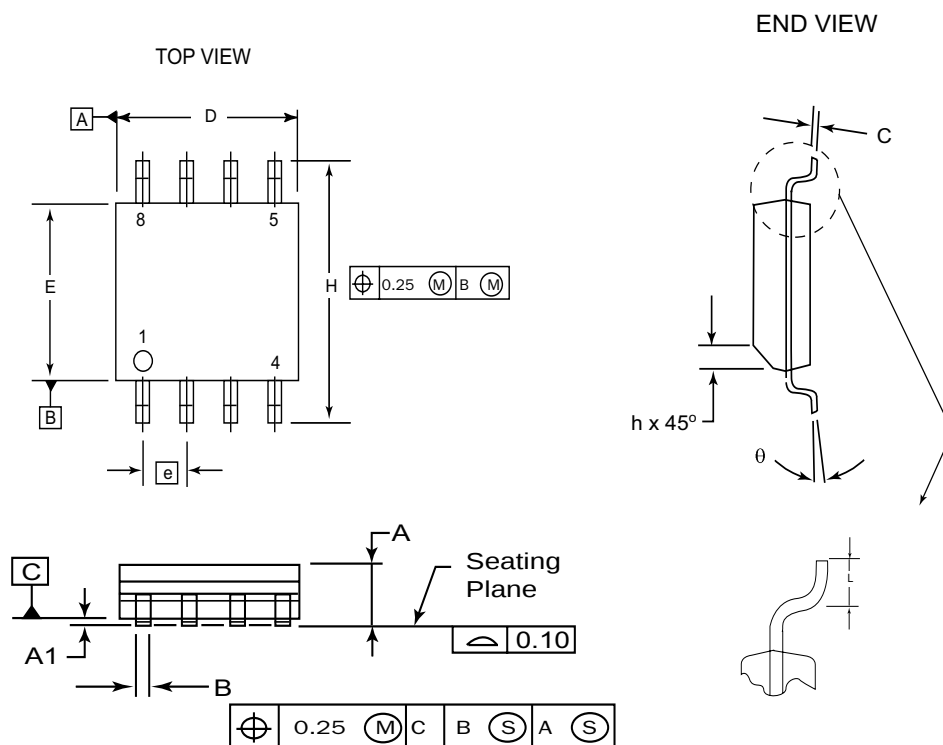
- Extended Supply Voltage Range: (VCC = 3.0V to 5.5V; VEE = 0V)
- 800 MHz Min. Toggle Frequency
- Typical 350 mV Differential LVDS Output
- VBB Output for Single-ended Applications
- Internal Input Resistors; Pulldown on D, Pulldown and Pullup on D*
- ESD Protection > 4000V
- Specified Over Industrial Temperature Range: -40°C to 85°C
- Available in 8 Lead SOIC and MSOP Packages

Pin Descriptions

Pin Name	Function
D, D*	Differential PECL / LVPECL inputs
Q, Q*	Differential LVDS Outputs
VBB	Reference Output Voltage

Functional Block Diagram

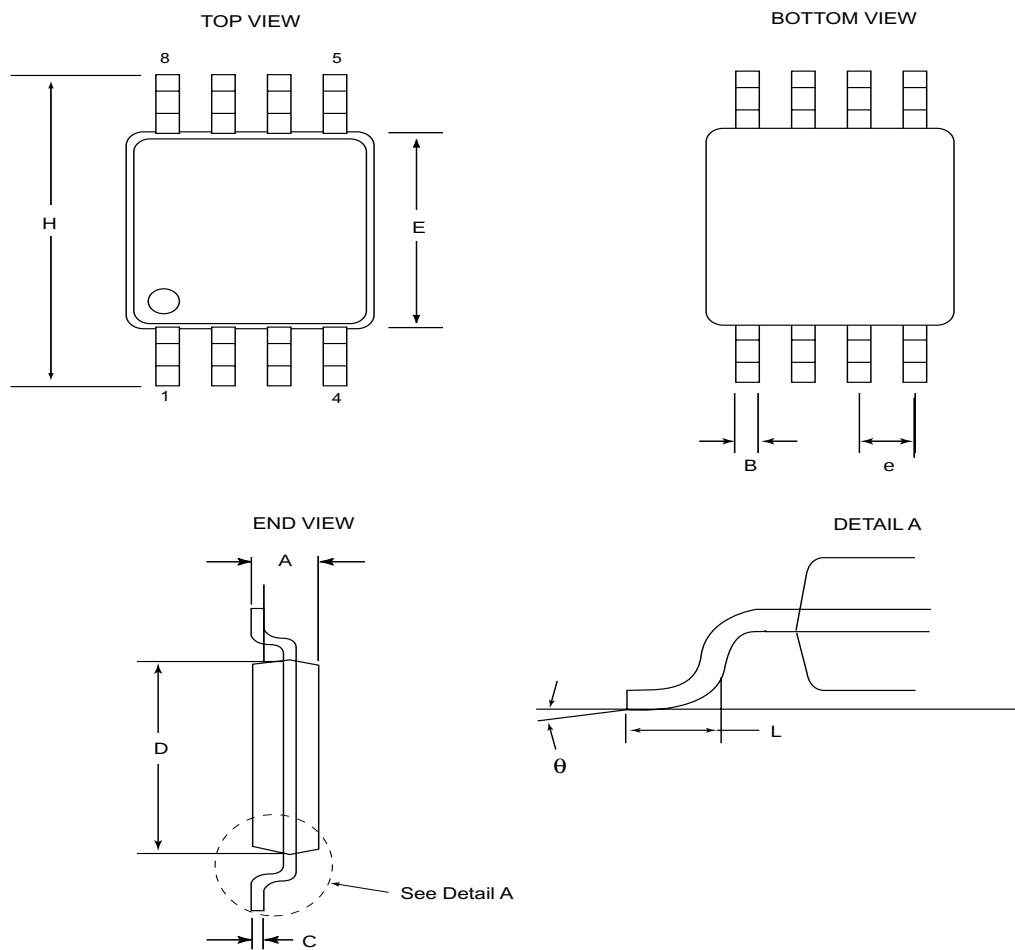


Package Information
8 Pin SOIC Package


DIM	MILLIMETERS	
	MIN	MAX
A	1.35	1.75
A1	0.10	0.25
B	0.33	0.51
C	0.19	0.25
D	4.80	5.00
E	3.80	4.00
e	1.27 BSC	
H	5.80	6.20
h	0.25	0.50
L	0.40	1.27
θ	0°	8°

NOTES:

1. Dimensions are in millimeters.
2. Dimensions D and E do not include mold protrusion.
3. Maximum mold protrusion 0.15 per side.
4. Dimension B does not include Dambar protrusion. Allowable Dambar protrusion shall be 0.127 total in excess of the B dimension at maximum material condition.

8-Pin MSOP


DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.94	1.1	0.037	0.043
B	0.15	0.3	0.006	0.012
C	0.1	0.26	0.004	0.001
D	2.85	3.15	0.114	0.122
E	2.9	3.1	0.114	0.122
e	0.5 BSC		0.02 BSC	
H	4.9 BSC		0.193 BSC	
L	0.40	0.7	.016	0.028
θ	0°	3°	0°	3°

NOTES:

1. Dimensions are in mm.
2. Controlling dimension: mm
3. Dimension does not include mold flash or protrusions, either of which shall not exceed 0.20.

Absolute Maximum Ratings

Symbol	Parameter	Value	Unit
V _{EE}	Power Supply (V _{CC} = 0V)	-6.0 to 0	V
V _{CC}	Power Supply (V _{EE} = 0V)	6.0 to 0	V
V _I	Input Voltage (V _{CC} = 0V, V _I not more negative than V _{EE})	-6.0 to 0	V
V _I	Input Voltage (V _{EE} = 0V, V _I not more positive than V _{CC})	6.0 to 0	V
I _{OUT}	Output Current Continuous Surge	50 100	mA mA
T _A	Operating Temperature Range	-40 to +85	°C
T _{stg}	Storage Temperature	-65 to +150	°C
θ _{JA} for SOIC	Thermal Resistance (Junction-to-Ambient) Still Air	153.7	°C/W
θ _{JC} for SOIC	Thermal Resistance (Junction-to-Case)	41.2	°C/W
θ _{JA} for MSOP	Thermal Resistance (Junction-to-Ambient) Still Air 500 lfpm (>2 layers)	206.3 140	°C/W °C/W
θ _{JC} for MSOP	Thermal Resistance (Junction-to-Case)	39.1	°C/W
T _{sol}	Solder Temperature (<2 to 3 seconds: 245°C desired)	265	°C

* Maximum Ratings are those values beyond which damage to the device may occur.

DC Characteristics
SK1300 LVDS Outputs DC Electrical Characteristics

(V_{CC} = +3.0V to +5.5V; V_{EE} = 0V)

Symbol	Characteristic	T _A = -40°C			T _A = 0°C			T _A = +25°C			T _A = +85°C			Unit
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
V _{OH}	Output High Voltage	1.25		1.8	1.25		1.8	1.25		1.8	1.25		1.8	V
V _{OL}	Output Low Voltage	0.95		1.5	0.95		1.5	0.95		1.5	0.95		1.5	V
R _O	Output Impedance			30			30			30			30	Ω
DV _{OUT} Single	Peak-to-Peak Single-Ended	250	350	470	250	350	470	250	350	470	250	350	470	mV

DC Characteristics (Continued)
SK1300 PECL / LVPECL Input DC Electrical Characteristics

(VCC = +3.0V to +5.5V; VEE = 0V)

Symbol	Characteristic	TA = -40°C		TA = 0°C		TA = +25°C		TA = +85°C		Unit	Cond
		Min	Max	Min	Max	Min	Max	Min	Max		
I _{IN}	Input Current	-150	150	-150	150	-150	150	-150	150	μA	
V _{BB}	Output Reference Voltage	3.62 1.92	3.74 2.04	3.62 1.92	3.74 2.04	3.62 1.92	3.74 2.04	3.62 1.92	3.74 2.04	V V	VCC = 5.0V VCC = 3.3V
V _{IH}	Input HIGH Voltage	3835 2135	4120 2420	3835 2135	4120 2420	3835 2135	4120 2420	3835 2135	4120 2420	mV mV	VCC = 5.0V VCC = 3.3V
V _{IL}	Input LOW Voltage	3190 1490	3525 1825	3190 1490	3525 1825	3190 1490	3525 1825	3190 1490	3525 1825	mV mV	VCC = 5.0V VCC = 3.3V
IEE	Supply Current		50		50		50		50	mA	

AC Characteristics
SK1300 AC Electrical Characteristics

(VCC = +3.0V to +5.5V; VEE = 0V)

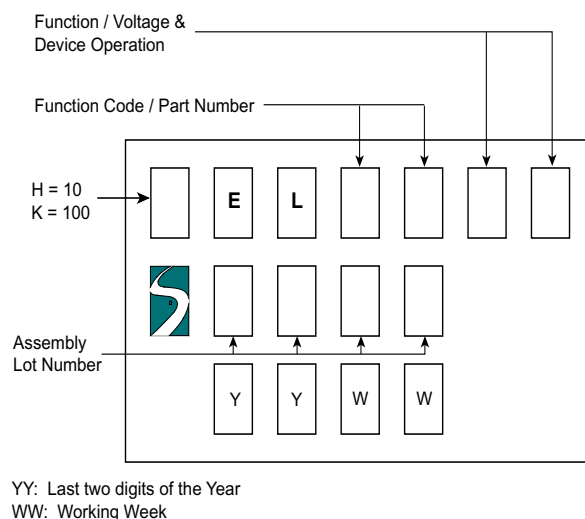
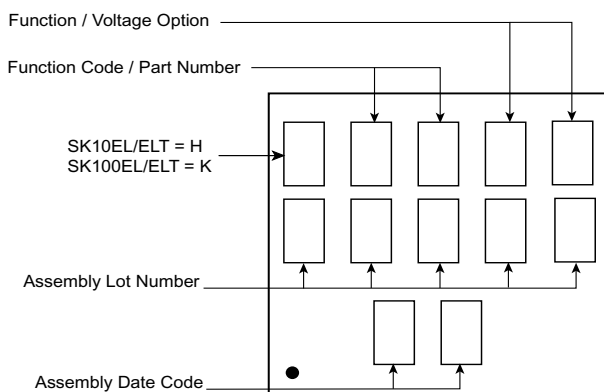
Symbol	Characteristic	TA = -40°C		TA = 0°C		TA = +25°C		TA = +85°C		Unit
		Min	Max	Min	Max	Min	Max	Min	Max	
F _{MAX}	Max Toggle Frequency ³	800		800		800		800		MHz
t _{PLH} t _{PHL}	Propagation Delay D to Q	280	545	280	545	305	620	375	720	ps
V _{PP}	Minimum Peak-to-Peak Input	200	1000	200	1000	200	1000	200	1000	mV
V _{CMR}	Common Mode Range 2	VEE+1.5	VCC-0.4	VEE+1.5	VCC-0.4	VEE+1.5	VCC-0.4	VEE+1.5	VCC-0.4	V
tr, tf	Output Rise/Fall	185	260	185	260	185	265	185	265	ps

Notes:

- For part ordering description, see HPP Part Ordering Information Data Sheet.
- CMR range is referenced to the most positive side of the differential input signal. Normal operation is obtained if the high level falls within the specified range and the peak-to-peak voltage lies between V_{PP}_(min) and 1V. The lower end of the CMR range varies 1:1 with VEE and is equal to VEE + 1.5V.
- 250 mV minimum output peak-to-peak swing for Max Toggle Frequency.

Ordering Information

Ordering Code	Package ID	Temperature Range
SK1300D	8-SOIC	Industrial
SK1300DT	8-SOIC	Industrial
SK1300MS	8-MSOP	Industrial
SK1300MST	8-MSOP	Industrial

Marking Information
8 PIN SOIC PACKAGE

8/10 PIN MSOP PACKAGES

Contact Information

Division Headquarters
10021 Willow Creek Road
San Diego, CA 92131
Phone: (858) 695-1808
FAX: (858) 695-2633

Semtech Corporation
High-Performance Products Division

Marketing Group
1111 Comstock Street
Santa Clara, CA 95054
Phone: (408) 566-8776
FAX: (408) 727-8994