


Features

- Schottky Barrier Chip
- Guard Ring for Transient Protection
- Low Power Loss, High Efficiency
- High Current Capability, Low V_F
- High Surge Capability
- For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Applications
- Plastic Material: UL Flammability Classification Rating 94V-0

Mechanical Data

- Case: TO220AC, Molded Plastic
- Terminals: Plated Leads, Solderable per MIL-STD-202, Method 208
- Polarity: See Diagram
- Weight: 2.3 grams (approx.)
- Mounting Position: Any
- Marking: Type Number

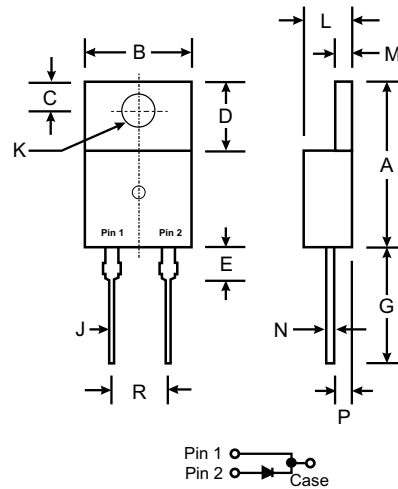

TO-220AC		
Dim	Min	Max
A	14.22	15.88
B	9.65	10.67
C	2.54	3.43
D	5.84	6.86
E	—	6.35
G	12.70	14.73
J	0.51	1.14
K	3.53 $\varnothing$	4.09 $\varnothing$
L	3.56	4.83
M	1.14	1.40
N	0.30	0.64
P	2.03	2.92
R	4.83	5.33
All Dimensions in mm		

Maximum Ratings and Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

Characteristic	Symbol	SBL 870	SBL 880	SBL 890	SBL 8100	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	70	80	90	100	V
RMS Reverse Voltage	$V_R(RMS)$	49	56	63	70	V
Average Rectified Output Current (Note 1) @ $T_C = 110^{\circ}C$	I_O	8.0				A
Non-Repetitive Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	175				A
Forward Voltage (Note 2) @ $I_F = 8.0A$, $T_C = 25^{\circ}C$	V_{FM}	0.85				V
Peak Reverse Current at Rated DC Blocking Voltage @ $T_C = 25^{\circ}C$ @ $T_C = 125^{\circ}C$	I_{RM}	0.1 100				mA
Typical Junction Capacitance (Note 3)	C_j	200				pF
Typical Thermal Resistance Junction to Case	$R_{\theta JL}$	3.0				$^{\circ}C/W$
Voltage Rate of Change	dV/dt	10000				$V/\mu s$
Operating and Storage Temperature Range	T_j, T_{STG}	-65 to +150				$^{\circ}C$

- Notes:
1. Thermal resistance junction to case mounted on heatsink.
 2. 300 μs pulse width, 2% duty cycle.
 3. Measured at $V_R = 4.0\text{V}$ and $f = 1.0\text{MHz}$

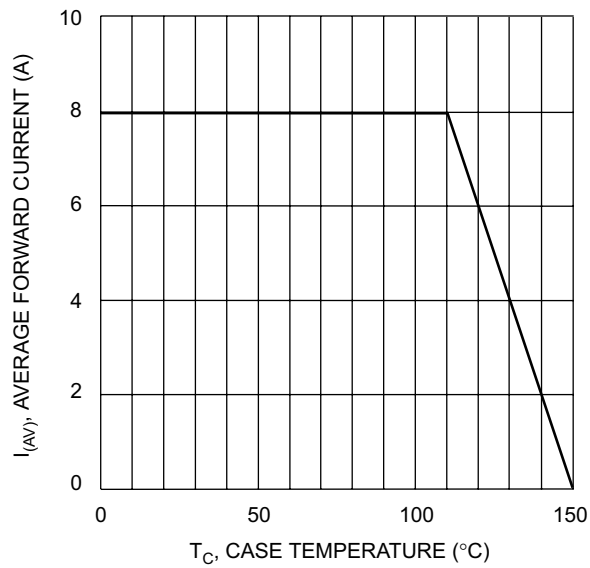


Fig. 1 Forward Current Derating Curve

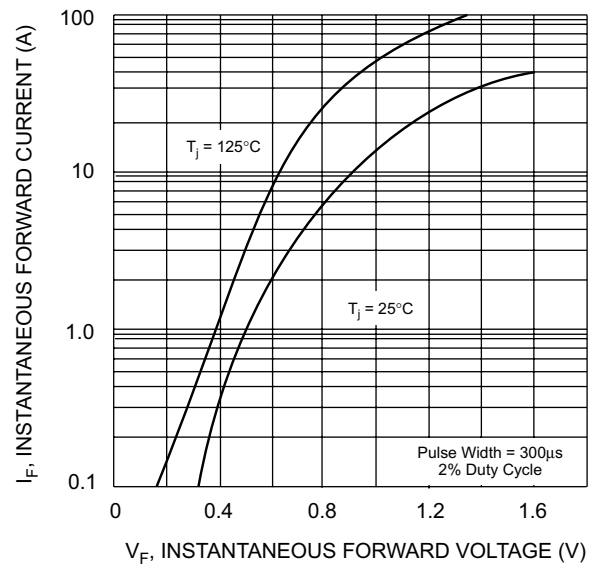


Fig. 2 Typical Forward Characteristics

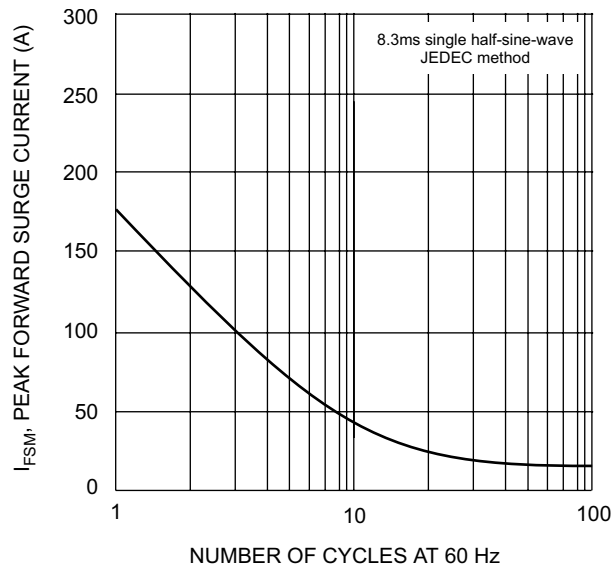


Fig. 3 Max Non-Repetitive Surge Current

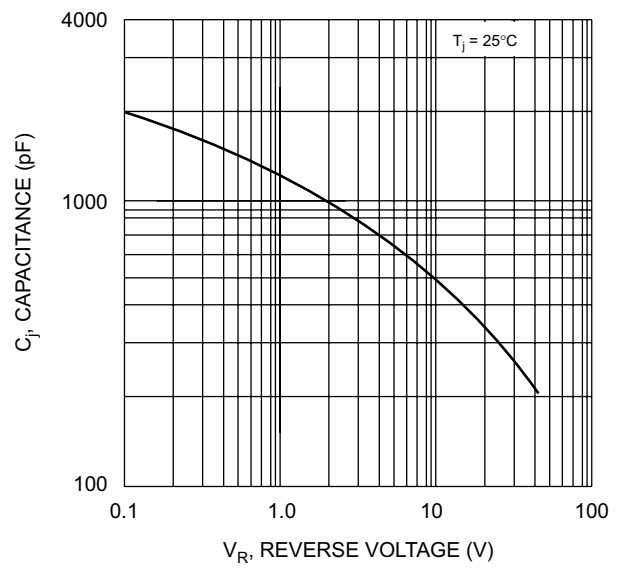


Fig. 4 Typical Junction Capacitance