




12/14 VDC Edison-Base SolarLED® Lamps


25mm Medium Screw Edison-Base

Options

- Frosted Lenses
- Other Standard Voltages
- Larger LED Clusters

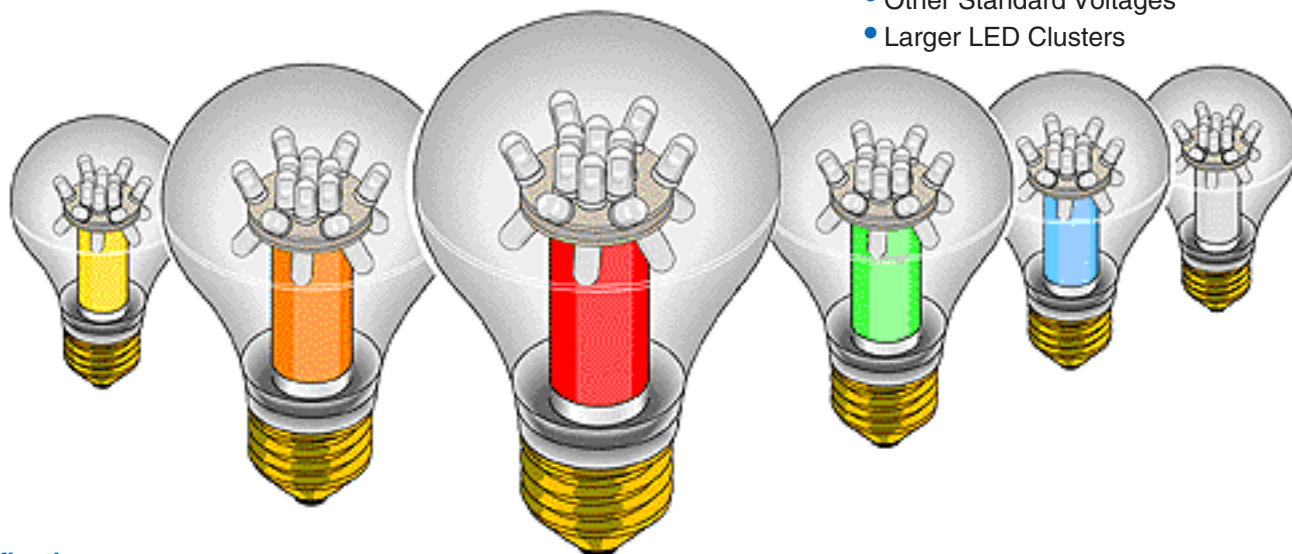

Specifications

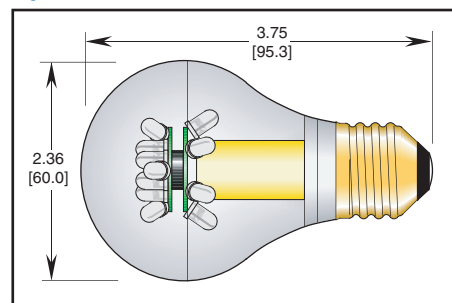

Part Number	Color	Voltage	Energy Used (Watts)	Total Lighting Elements	Total Light Output I _v (mcd)	Beam Spread
SLR-A19-0UR-N3	Red ●	12/14 VDC	1.7W	18	22,500	
SLR-A19-0UO-N3	Amber ●	12/14 VDC	1.7W	18	22,500	
SLR-A19-0UY-N3	Yellow ●	12/14 VDC	1.7W	18	22,500	
SLR-A19-0CW-N3	White ○	12/14 VDC	1.7W	18	13,500	
SLR-A19-0AG-N3	Green ●	12/14 VDC	1.7W	18	26,000	
SLR-A19-0UB-N3	Blue ●	12/14 VDC	1.7W	18	36,000	


Option: Available with Low-Voltage Disconnect (LVD) battery protection circuit (the LVD option Part Number replaces "-N3" with "-03")

Applications

Garden lighting



Offshore oil platforms

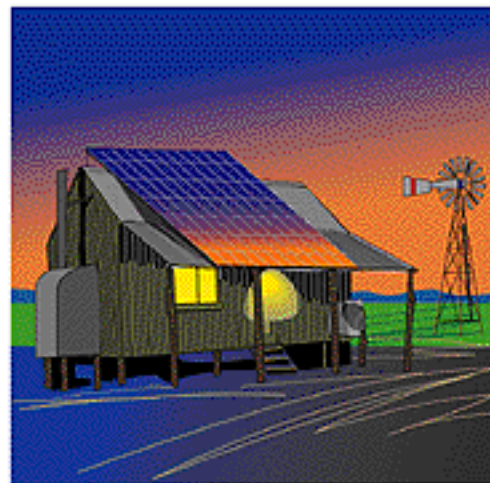

Solar lighting