

Scope

This specification shall cover the characteristics of SAW filter with SF465B at 465.000 MHz in F-11 package used for RF receiving system.

SF465B



Absolute Maximum Rating (Ta=25°C)		
Parameter	Rating	Unit
CW RF Power Dissipation	+ 0	dBm
DC Voltage VDC	10	V
Operating Temperature Range	-20 ~ +60	°C
Storage Temperature Range	-45 ~ +85	°C

Specifications					
Parameter	Sym	Minimum	Typical	Maximum	Unit
Center Frequency (25°C)	fc	NS	465.000	NS	MHz
3dB Passband	BW3	-	±3.0	-	MHz
Insertion Loss at Passband	IL	-	-	4.0	dB
Passband Ripple	-	-	-	2.0	dB
Rejection	fc – 13.7MHz ~ fc – 7.7MHz	-	8	-	dB
	fc – 45.8MHz ~ fc – 39.8Hz	-	50	-	dB
	fc + 39.8MHz ~ fc + 45.8MHz	-	45	-	dB
Input/Output Impedance	-	-	150 0	-	Ω pF
DC Insulation Resistance Between any Two Pins	-	10	-	-	MΩ

NS = Not Specified

Notes	Package Outline (F-11)
-------	------------------------

- Reference temperature shall be $25 \pm 2^\circ\text{C}$. However, the measurement may be carried out at 5°C to 35°C unless there is a dispute.
- Static voltage
Static voltage between signal load & ground may cause deterioration & destruction of the component. Please avoid static voltage.
- Ultrasonic cleaning
Ultrasonic vibration may cause deterioration & destruction of the component. Please avoid ultrasonic cleaning.
- Soldering
Only leads of component may be solder. Please avoid soldering another part of component.

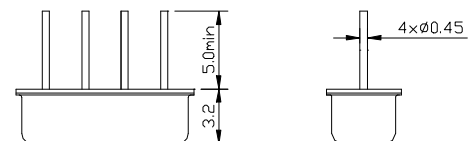

Pin	Connection
1	Input
2	Ground
3	Ground
4	Output

All dimensions are in mm