


SBL10L30, SBLF10L30 & SBLB10L30


Schottky Barrier Rectifier

Reverse Voltage 30V


Forward Current 10A

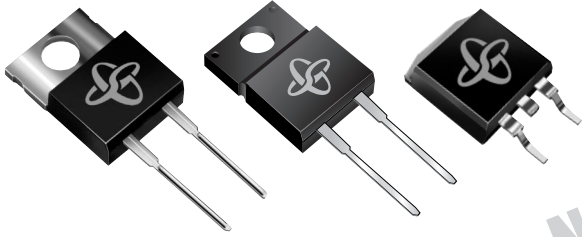

TO-220AC (SBL10L30)

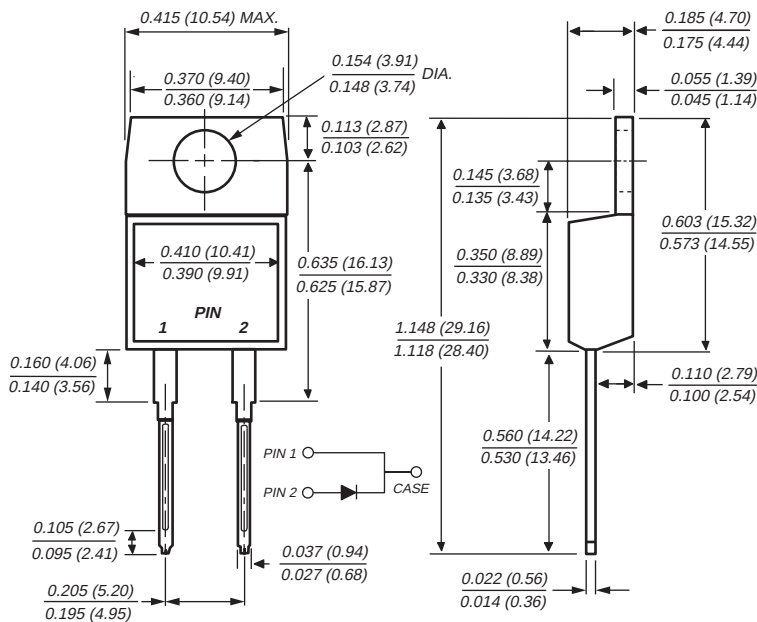


Mounting Pad Layout TO-263AB

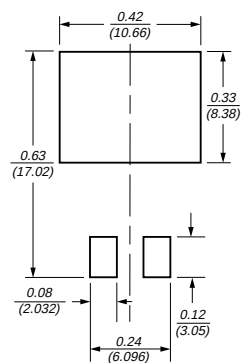


*Dimensions in inches
and (millimeters)*

ITO-220AC (SBLF10L30)

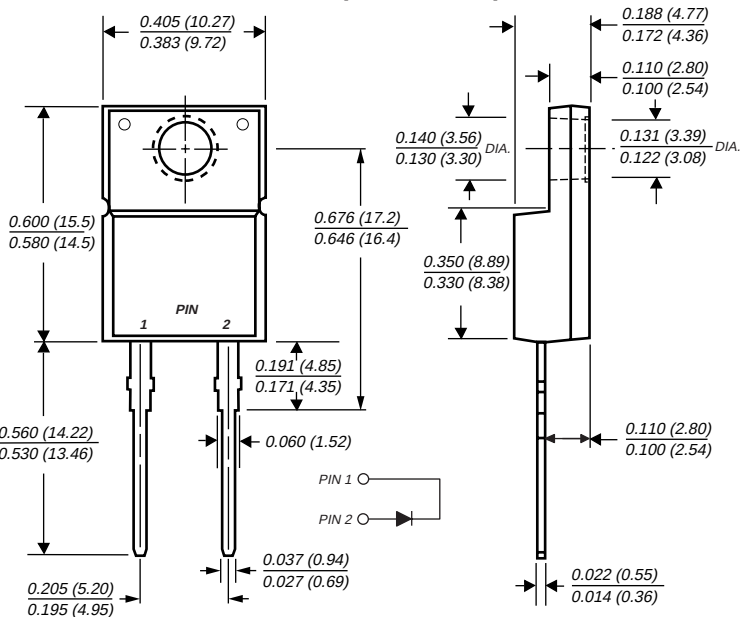

TO-263AB (SBLB10L30)

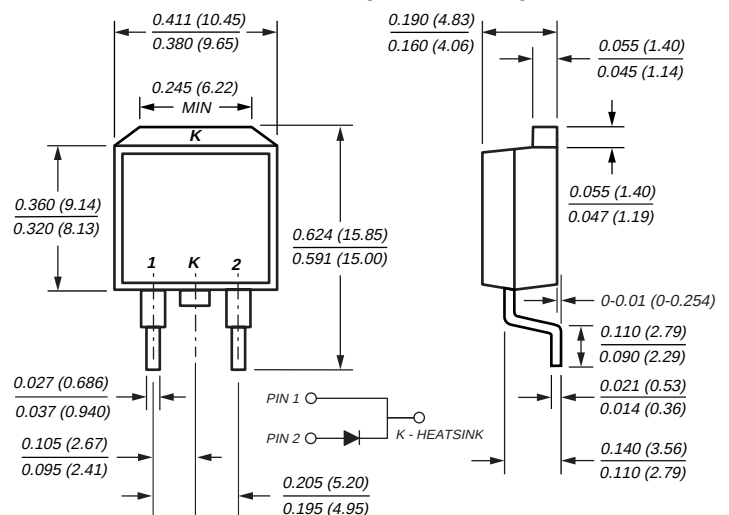

Mechanical Data

Case: JEDEC TO-220AC, ITO-220AC & TO-263AB
molded plastic body

Terminals: Plated leads, solderable per MIL-STD-750, Method 2026

High temperature soldering guaranteed:
250°C/10 seconds, 0.25" (6.35mm) from case

Polarity: As marked

Mounting Position: Any

Mounting Torque: 10 in-lbs maximum

Weight: 0.08 ounce, 2.24 grams

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Dual rectifier construction, positive center tap
- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency
- Guardring for overvoltage protection
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

SBL10L30, SBLF10L30 & SBLB10L30

Schottky Barrier Rectifier

Maximum Ratings (T_C = 25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Maximum repetitive peak reverse voltage	V _{RRM}	30	V
Working peak reverse voltage	V _{RWM}	21	V
Maximum DC blocking voltage	V _{DC}	30	V
Maximum average forward rectified current at T _C = 140 °C	I _{F(AV)}	10	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) per leg	I _{FSM}	250	A
Peak repetitive reverse current at t _p = 2μs, 1kHz	I _{RRM}	1.0	A
Voltage rate of change (rated V _R)	dv / dt	10,000	V / μs
Operating junction and storage temperature range	T _J , T _{STG}	-65 to +150	°C
RMS Isolation voltage (SBLF type only) from terminals to heatsink with t = 1 second, RH ≤ 30%	V _{ISOL}	4500 ⁽¹⁾ 3500 ⁽²⁾ 1500 ⁽³⁾	V

Electrical Characteristics (T_C = 25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Maximum instantaneous forward voltage ⁽⁴⁾ at I _F = 10A, T _J = 25°C at I _F = 10A, T _J = 125°C	V _F	0.52 0.43	V
Maximum instantaneous reverse current at DC blocking voltage ⁽⁴⁾ T _J = 25°C T _J = 125°C	I _R	1.0 100	mA

Thermal Characteristics (T_C = 25°C unless otherwise noted)

Parameter	Symbol	SBL	SBLF	SBLB	Unit
Typical thermal resistance from junction to case per leg	R _{θJC}	4.3	4.8	4.3	°C/W

Notes:

- (1) Clip mounting (on case), where lead does not overlap heatsink with 0.110" offset
- (2) Clip mounting (on case), where leads do overlap heatsink
- (3) Screw mounting with 4-40 screw, where washer diameter is ≤ 4.9 mm (0.19")
- (4) Pulse test: 300μs pulse width, 2% duty cycle

Ordering Information


Product	Case	Package Code	Package Option
SBL10L30	TO-220AC	45	Anti-Static tube, 50/tube, 2K/carton
SBLF10L30	ITO-220AC	45	Anti-Static tube, 50/tube, 2K/carton
SBLB10L30	TO-263AB	31	13" reel, 800/reel, 4.8K/carton
		45	Anti-Static tube, 50/tube, 2K/carton
		81	Anti-Static 13" reel, 800/reel, 4.8K/carton

SBL10L30, SBLF10L30 & SBLB10L30


Schottky Barrier Rectifier

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)


**Fig. 1 - Forward Current
Derating Curve**

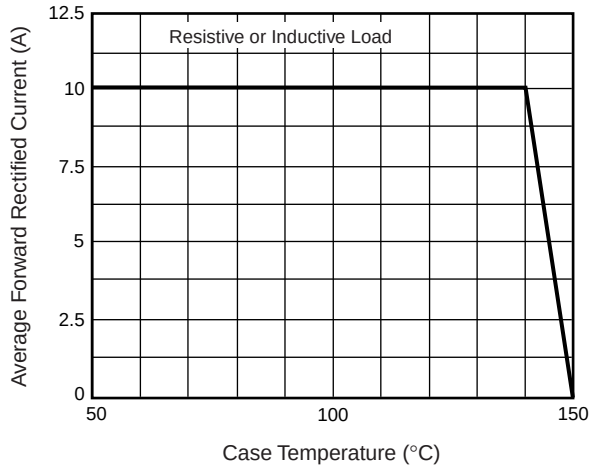


**Fig. 2 - Typical Instantaneous
Forward Characteristics Per Leg**

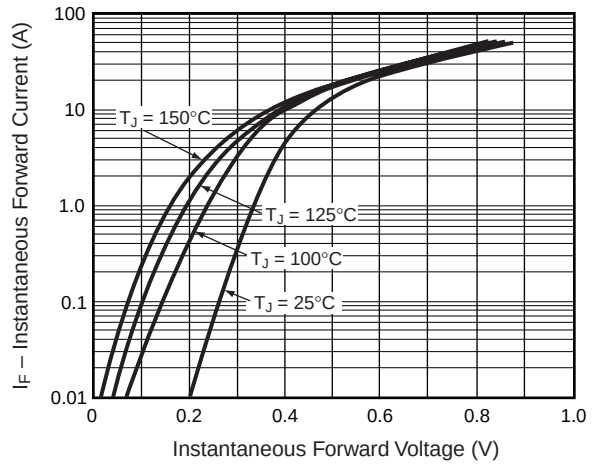

**Fig. 3 - Typical Reverse Characteristics
Per Leg**

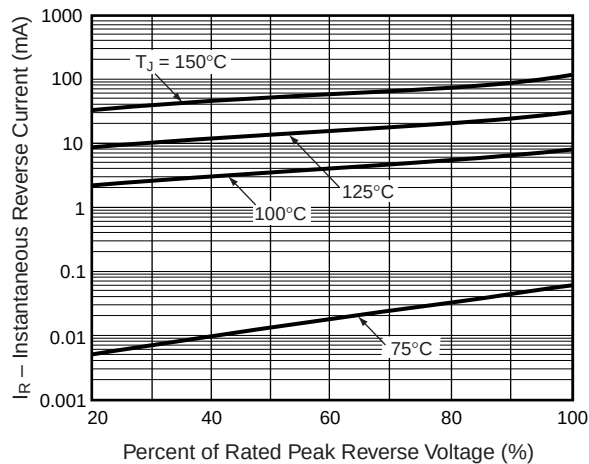

**Fig. 4 - Typical Junction Capacitance
Per Leg**

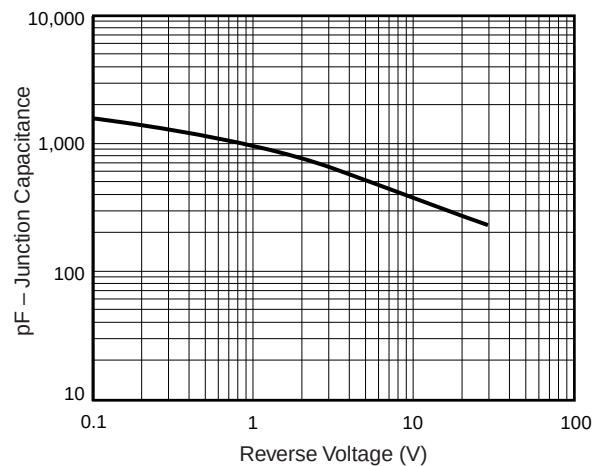

**Fig. 5 - Typical Thermal
Impedance Per Leg**

