




PRELIMINARY

SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424**SED150LB30**
SED150LE30**Designer's Data Sheet****FEATURES:**

- Low Reverse Leakage
- Low Forward Voltage Drop
- Hermetically Sealed Power Surface Mount Package
- Guard Ring for Overvoltage protection
- Eutectic Die Attach
- 175°C Operating Temperature
- TX, TXV and Space Level Screening Available

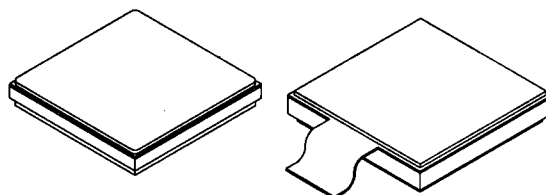150 AMPS
30 VOLTS
SCHOTTKY
RECTIFIER**SEDPACK 3****MAXIMUM RATINGS**

RATING	SYMBOL	VALUE	UNIT
Peak Repetitive Reverse and DC Blocking Voltage	VRRM VRWM VR	30	Volts
Average Rectified Forward Current (Resistive Load, 60Hz, Sine Wave, TC=100°C)	Io	150	Amps
Peak Surge Current (8.3 ms Pulse, Half Sine Wave Superimposed on Io, allow junction to reach equilibrium between pulses, TA=25°C)	IFSM	1000	Amps
Operating and storage temperature	Top & Tstg	-55 TO +175	°C
Maximum Thermal Resistance Junction to Case	RθJC	0.2	°C/W

ELECTRICAL CHARACTERISTICS

Instantaneous Forward Voltage Drop (IF = 50 Adc, TA=25°C, 300μs Pulse) (IF = 110 Adc, TA=25°C, 300μs Pulse) (IF = 150 Adc, TA=25°C, 300μs Pulse)	VF1	0.46 0.55 0.65	Vdc
Instantaneous Forward Voltage Drop (IF = 150 Adc, TA= +125°C, 300μs Pulse)	VF2	0.60	Vdc
Reverse Leakage Current (Rated VR, TA=25°C, 300μs pulse minimum)	IR1	7.5	mA
Reverse Leakage Current (Rated VR, TA=125°C, 300μs pulse minimum)	IR2	500	mA
Junction Capacitance (VR = 5 Vdc, TA=25°C, f= 1 MHz)	CJ	7500	pf

NOTE: All specifications are subject to change without notification.
SCD's for these devices should be reviewed by SSDI prior to release.**DATA SHEET#: RSED15 A****MED**


SED150LB30 SED150LE30

PRELIMINARY


SSDI
SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424

CASE OUTLINE: P/N SED150LB30

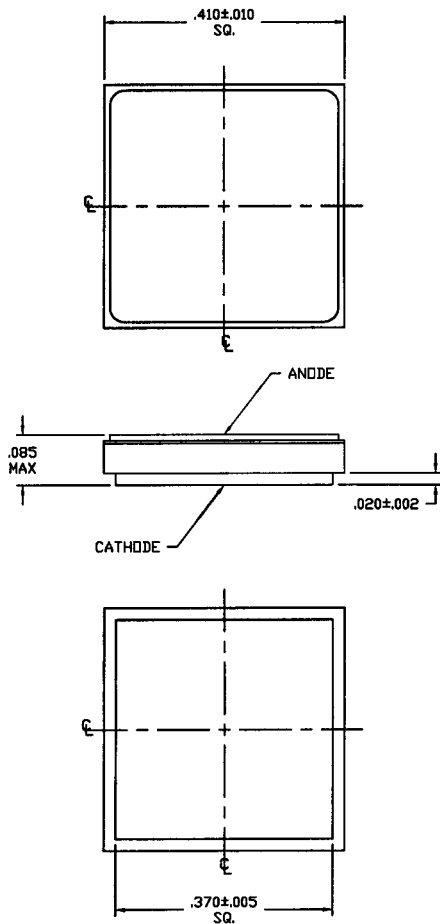

CASE OUTLINE: P/N SED150LE30

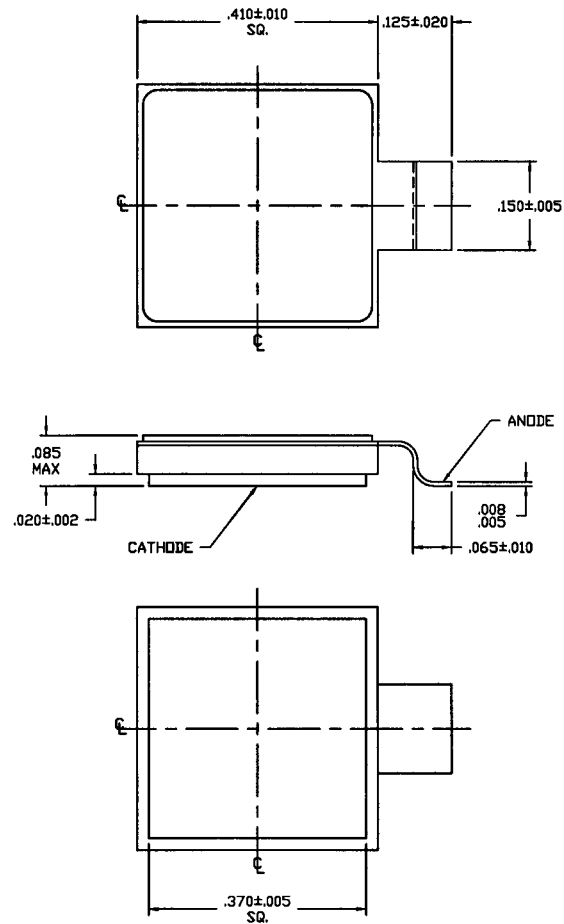

TYPICAL OPERATING CURVES (TA=25°C unless otherwise specified)

