

**SDR998N&P
 thru
 SDR9911N&P**


Designer's Data Sheet

FEATURES:


- Ultrafast Recovery: 60 nsec typical
- High Surge Rating
- Low Reverse Leakage Current
- Low Forward Voltage Drop
- Low Junction Capacitance
- Hermetically Sealed Package
- Gold Eutectic Die Attach available
- Ultrasonic Aluminum Wire Bonds
- Ceramic Seals for improved hermeticity available
- TX, TXV and Space Level Screening Available

**100 AMP
 800-1100 VOLTS
 80 nsec
 ULTRA FAST
 RECTIFIER**

TO-258



TO-259



MAXIMUM RATINGS

RATING	SYMBOL	VALUE	UNIT
Peak Repetitive Reverse and DC Blocking Voltage SDR998N&P SDR999N&P SDR9910N&P SDR9911N&P	VRRM VRWM VR	 800 900 1000 1100	 Volts
Average Rectified Forward Current (Resistive Load, 60Hz, Sine Wave, TA=25°C) note 1	IO	50	Amps
Peak Surge Current (8.3 ms Pulse, Half Sine Wave, TA=25°C) note 2	IFSM	550	Amps
Operating and storage temperature	Top & Tstg	-65 to +200	°C
Maximum Thermal Resistance Junction to Case, note 1	RθJC	0.5	°C/W

note 1 Pins 2&3 connected
 note 2 Higher surge ratings available

NOTE: All specifications are subject to change without notification.
 SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET#: RU0117 A

MED

SDR998N&P thru SDR9911N&P

PRELIMINARY



SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424


ELECTRICAL CHARACTERISTICS

CHARACTERISTICS	SYMBOL	MAXIMUM	UNIT
Instantaneous Forward Voltage Drop (IF = 50 Adc, TA=25°C, 300ms Pulse) note 1 (IF=100 Adc, TA=25°C, 300ms Pulse) note 1	VF	1.5 1.7	Vdc
Instantaneous Forward Voltage Drop (IF = 50 Adc, TA=100°C, 300ms Pulse) note 1 (IF = 50 Adc, TA= - 55°C, 300ms Pulse) note 1	VF	1.4 1.6	Vdc
Reverse Leakage Current (Rated VR, TA=25°C, 300ms pulse minimum)	IR	200	μA
Reverse Leakage Current (Rated VR, TA=100°C, 300ms pulse minimum)	IR	20	mA
Junction Capacitance (VR = 10 Vdc, TA=25°C, f= 1 MHz)	CJ	300	pf
Reverse Recovery Time (IF=500mA, IR=1 A, IRR=250mA, TA=25°C)	trr	80	nsec

CASE OUTLINE: TO-258


PIN 1: CATHODE
PIN 2: ANODE
PIN 3: ANODE

note 1:
Pin 2 & 3
connected
together

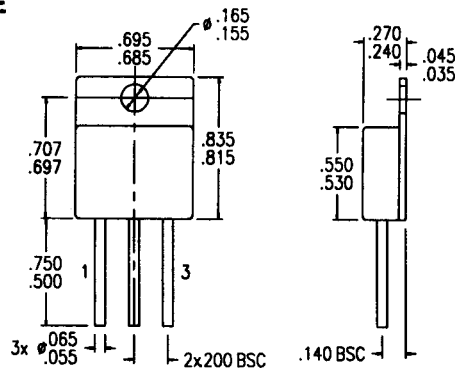

CASE OUTLINE: TO-259

PIN 1: CATHODE
PIN 2: ANODE
PIN 3: ANODE

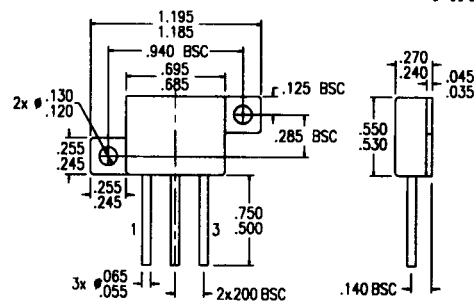

TYPICAL OPERATING CURVES

TA=25°C Unless otherwise specified

