


SDR811N & P AND SDR814N & P**100 AMP****ISOLATED FLAT PACK****HYPER FAST RECTIFIER****500 AND 800 VOLTS****SSDI**

14849 FIRESTONE BLVD.
LA MIRADA, CA 90638
TEL: (213) 921-9660
FAX: (213) 921-2396

CASE STYLE

T0-259(P)

T0-258(N)

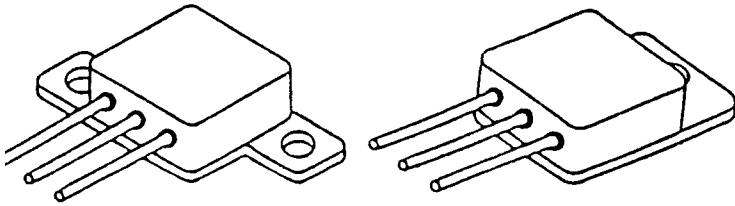**FEATURES**

- ▶ ISOLATED LOW PROFILE PACKAGE
- ▶ HYPER FAST RECOVERY 35nsec MAX
- ▶ 200 °C OPERATING, EUTECTIC DIE ATTACH
- ▶ REVERSE VOLTAGE TO 800 VOLTS
- ▶ LOW REVERSE LEAKAGE
- ▶ 10 OF 100 AMPS
- ▶ HERMETICALLY SEALED
- ▶ LOW THERMAL RESISTANCE 0.5 °C/W

MAXIMUM RATINGS

RATING	SYMBOL	VALUE	UNIT
Peak Repetitive Reverse Voltage and DC Blocking Voltage (IR = 100 μA) SDR811N & P SDR814N & P	VRM(rep) VR	500 800	Volts
Half Wave Rectified Forward Current Averaged Over Full Cycle (Resistive Load, 60Hz, Sine Wave, TC=25 °C)	IO	100	Amps
Peak Repetitive Forward Current (TC=55 °C, 8.3ms Pulse, Allow Junction to Reach Equilibrium Between Pulses)	IFM(rep)	200	Amps
Peak Surge Current (TC=55 °C, 8.3ms Pulse, Superimposed on Rated Current at Rated Voltage)	IFM(surge)	1000	Amps
Operating and Storage Temperature	TJ, Tstg	-65 to +200	°C

THERMAL CHARACTERISTICS

CHARACTERISTIC	SYMBOL	VALUE	UNIT
Thermal Resistance, Junction to Case, terminal 2 and 3 tied together	RθJC	0.5	°C/W

ELECTRICAL CHARACTERISTICS



CHARACTERISTIC	SYMBOL	VALUE	UNITS
Max Instantaneous Forward Voltage Drop * (IF = 100Adc. TA = 25 °C) SDR811N & P SDR814N & P	VF	1.5 1.7	Volts
Max Instantaneous Forward Voltage Drop * (IF = 100Adc. TA = 100 °C) SDR811N & P SDR814N & P	VF	1.4 1.6	Volts
Max Reverse Leakage Current * (Rated VR. TA = 25 °C)	IR	200	μAdc
Max Reverse Leakage Current * (Rated VR. TA = 100 °C)	IR	20	mAdc
Max Junction Capacitance (VR = 10V. TA = 25 °C)	CJ	700	pf
Max Reverse Recovery Time (IF = 500mA. IR = 1A. IRR = 250mA) SDR811N & P SDR814N & P	trr	35 60	ns

*) Pulse Width = 300μs. Duty Cycle = 2 %.

PHYSICAL DIMENSIONS

TO-258 (N)

TO-259 (P)

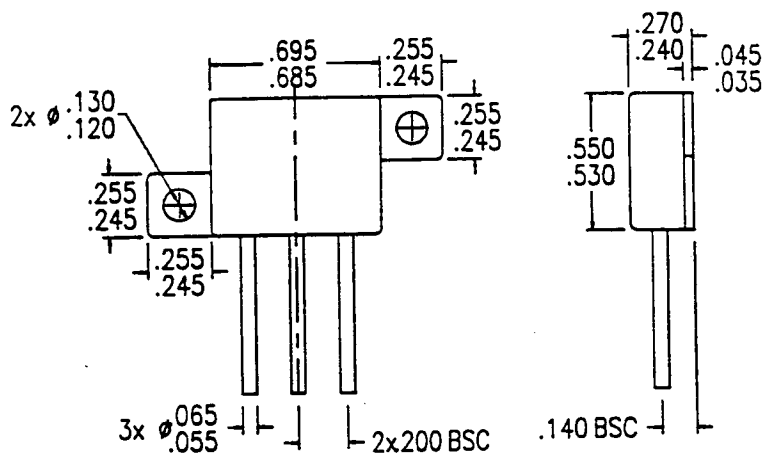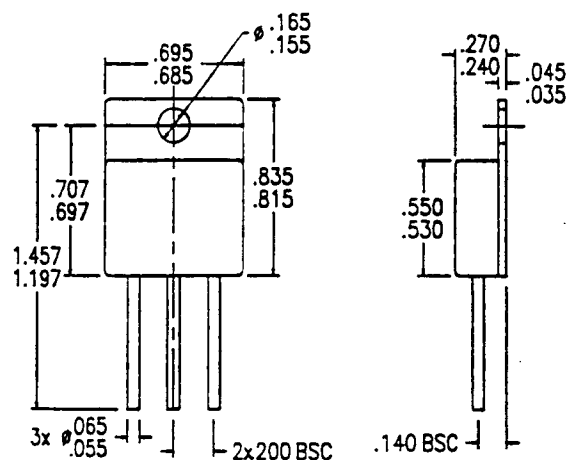

SSDI

SOLID STATE DEVICES, INC.

14849 FIRESTONE BOULEVARD ♦ LA MIRADA, CA 90638
TELEPHONE (213) 921-9660 ♦ FAX (213) 921-2396