

M4Z M4Z

SDR952CT~~/254~~ THROUGH SDR955CT~~/254~~

80 AMP
ULTRA FAST RECOVERY
RECTIFIER

POSITIVE CENTERTAP

200 - 500 VOLTS

SSDI

X00185

14849 FIRESTONE BLVD.
 LA MIRADA, CA 90638
 TEL: (213) 921-9660
 FAX: (213) 921-2396


CASE STYLE

TO-254

"Z"-PACK

(ADD Z SUFFIX)

FEATURES

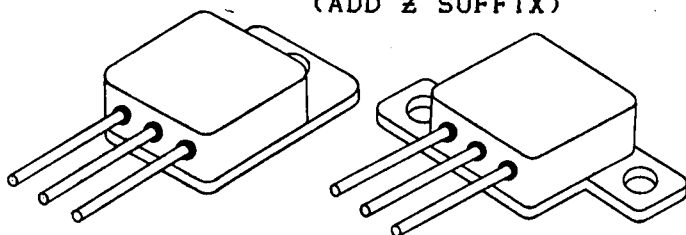

- ▶ ISOLATED LOW PROFILE PACKAGE
- ▶ HERMETICALLY SEALED
- ▶ ULTRA FAST RECOVERY 35nsec MAX
- ▶ REVERSE VOLTAGE TO 500 VOLTS
- ▶ LOW REVERSE LEAKAGE, LOW CAPACITANCE
- ▶ 200 °C OPERATING, EUTECTIC DIE ATTACH

MAXIMUM RATINGS

RATING	SYMBOL	VALUE	UNIT
Peak Repetitive Reverse Voltage Per Leg and DC Blocking Voltage Per Leg (IR = 100 μ A)	VRM(rep) VR		Volts
SDR952CT /254 M4Z		200	
SDR953CT /254 M4Z		300	
SDR954CT /254 M4Z		400	
SDR955CT /254 M4Z		500	
RMS Reverse Voltage Per Leg	Vr		Volts
SDR952CT /254 M4Z		140	
SDR953CT /254 M4Z		210	
SDR954CT /254 M4Z		280	
SDR955CT /254 M4Z		350	
Half Wave Rectified Forward Current Averaged Over Full Cycle (Resistive Load, 60Hz, Sine Wave, TC=55 °C)	IO	80	Amps
Peak Repetitive Forward Current (TC=55 °C, 8.3ms Pulse, Allow Junction to Reach Equilibrium Between Pulses)	IFM(rep)	300	Amps
Peak Surge Current (TC=55 °C, 8.3ms Pulse, Superimposed on Rated Current at Rated Voltage)	IFM(surge)	900	Amps
Operating and Storage Temperature	TJ, Tstg	-65 to +200	°C

THERMAL CHARACTERISTICS

CHARACTERISTIC	SYMBOL	VALUE	UNIT
Thermal Resistance, Junction to Case, both legs tied together	R θ JC	0.75	°C/W

ELECTRICAL CHARACTERISTICS


CHARACTERISTIC	SYMBOL	VALUE	UNITS
Max Full Cycle Forward Voltage Drop, Averaged Over Full Cycle Per Leg (10(MAX), 60Hz, Square Wave, TC=55 °C)	VF(AV)	0.85	Volts
Max Instantaneous Forward Voltage Drop * Per Leg (IF=40 Adc, TC=25 °C, 300us Pulse)	VF	1.7	Volts
Max Reverse Leakage Current Per Leg * (VR = 80 % Rated VR, TC = 100 °C)	IR	5.0	mAdc
Max Reverse Leakage Current Per Leg (VR = 80 % Rated VR, TC = 25 °C)	IR	50	uAdc
Max Junction Capacitance Per Leg (VR = 10V, TC = 25 °C)	CJ	150	pf

*) Pulse Test: Pulse Width = 300 μ s, Duty Cycle = 2 %.

REVERSE RECOVERY CHARACTERISTICS


Characteristic	Symbol	Min	Typ	Max	Unit
Reverse Recovery Time Per Leg (IF=500mA, IR=1A, IRR=250mA)	trr	-	30	35	ns

PHYSICAL DIMENSIONS

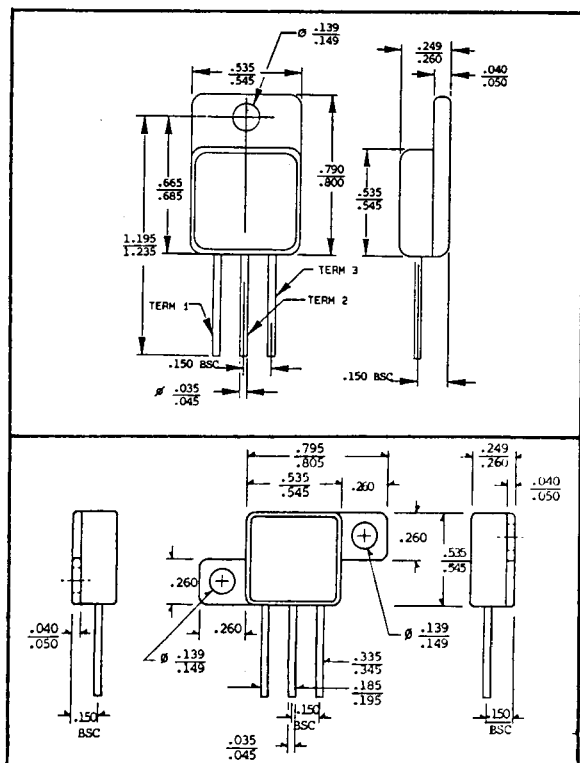


TYPICAL OPERATING CURVES

MAXIMUM FORWARD CURRENT VS. LEAD TEMP.

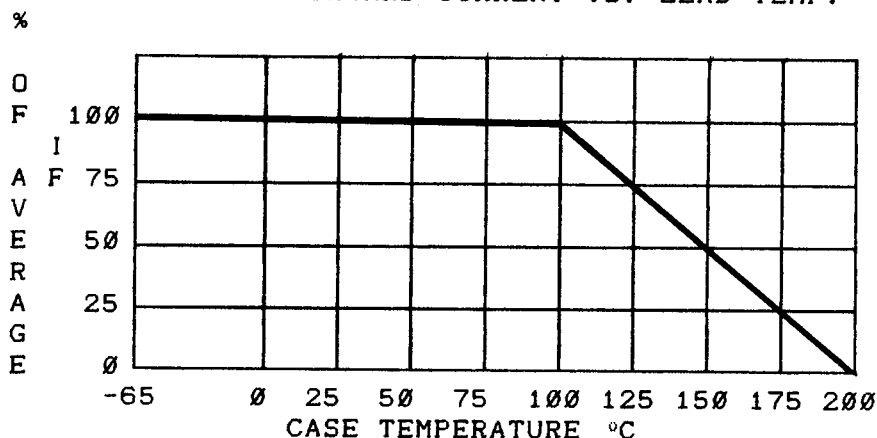

POLARITY:



SSDI SOLID STATE DEVICES, INC.

14849 FIRESTONE BOULEVARD, LA MIRADA, CA 90638

Telephone: (213) 921-9660 ♦ FAX: 213-921-2396