TOSHIBA RECTIFIER SILICON DIFFUSED TYPE

# S5688B, S5688G, S5688J, S5688N

GENERAL PURPOSE RECTIFIER APPLICATIONS.


Unit in mm

Average Forward Current : I<sub>F (AV)</sub>=1.0A

• Repetitive Peak Reverse Voltage: VRRM=100~1000V

### MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	RATINGS	UNIT	
Repetitive Peak Reverse Voltage	S5688B		100		
	S5688G	$v_{ m RRM}$	400	$\mathbf{v}$	
	S5688J		600		
	S5688N		1000		
Average Forward Current		I <sub>F (AV)</sub>	1.0	A	
Peak One Cycle Surge Forward Current (Non Repetitive)	S5688B		45 (50Hz)		
	S5688G	$I_{ ext{FSM}}$	49 (60Hz)		
	S5688J		30 (50Hz)	A	
	S5688N		33 (60Hz)		
Junction Temperature		$T_{j}$	-40~150	°C	
Storage Temperature Range		$\mathrm{T_{stg}}$	-40~150	°C	

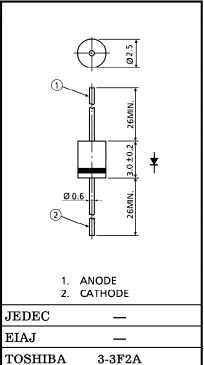

Weight: 0.18g


## ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Peak Forward Voltage	$V_{\mathbf{FM}}$	$I_{\text{FM}} = 1.0 \text{A}$	_	_	1.2	V
Repetitive Peak Reverse Current	$I_{ m RRM}$	V <sub>RRM</sub> =Rated	_	_	10	$\mu$ <b>A</b>

961001EAA2

<sup>●</sup> TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

## **MARK**



#### Color

TYPE	COLOR	
S5688B	White	
S5688G	Blue	
S5688J	Yellow	
S5688N	Green	

#### LOT NUMBER

LOT NOWIDER						
YEAR MONTH	1996	1997	1998			
1	•	•	•			
2	<u>•</u> 1•1	••	<u>•</u> 1•			
3	<u>•</u> ,•,•	• • •	<u>•</u>  ••			
4	<u>•,•,• •</u>	• • • •	• • • •			
5	•	•	•			
6	●, •,	• •	<u>•</u> ,•			
7	0,0,0	• • •	<u>•</u> ,••			
8	0,0,00	• • • •	•,•••			
9	0,0,	••	0,0			
10	•,•,•	•••	0,0 •			
11	•,•,••	••••	<b>9</b> ₁ <b>0</b> • •			
12						

961001EAA2

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
 The information contained herein is subject to change without notice.

