

Spread Spectrum Clock Generator**Features**

- 54 to 200 MHz Operating Frequency Range
- Wide (9) Range of Spread Selections
- Accepts Clock and Crystal Inputs
- Low Power Dissipation
3.3V = 165 mw. (Fin = 200 MHz)
- Frequency Spread Disable Function
- Center Spread Modulation
- Low Cycle-to Cycle Jitter
- 8-pin SOIC package

Applications

- High Resolution VGA Controllers
- LCD Panels and Monitors
- Work Stations and Servers

Benefits

- Peak EMI reduction by 8 to 16dB
- Fast Time to Market
- Cost Reduction

General Description

The **CYPRESS SM562** is a Spread Spectrum Clock Generator (SSCG) IC used for the purpose of reducing Electro Magnetic Interference (EMI) found in today's high-speed digital electronic systems.

The SM562 uses a Cypress proprietary Phase-Locked Loop (PLL) and Spread Spectrum Clock (SSC) technology to synthesize and frequency modulate the input frequency of the reference clock. By frequency modulating the clock, the measured EMI at the fundamental and harmonic frequencies of clock (SSCLK) is greatly reduced.

This reduction in radiated energy can significantly reduce the cost of complying with regulatory requirements and time to market without degrading system performance.

The SM562 is a very simple and versatile device to use. The frequency and spread % range is selected by programming S0 and S1 digital inputs. These inputs use three (3) logic states including High (H), Low (L) and Middle (M) logic levels to select one of the 9 available Frequency Modulation and Spread % ranges. Refer to table 2 for programming details.

The SM562 is intended for applications with a reference frequency in the range of 54 to 200 MHz.

A wide range of digitally selectable spread percentages is made possible by using Three-Level (High, Low and Middle) logic at the S0 and S1 digital control inputs.

The output spread (frequency modulation) is symmetrically centered on the input frequency.

Spread Spectrum Clock Control (SSCC) function enables or disables the frequency spread and is provided for easy comparison of system performance during EMI testing.

The SM562 is available in an 8-pin SOIC package with a 0 to 70°C operating temperature range.

Refer to the SM561 for applications with lower drive requirements and the SM560 with lower drive and frequency requirements.

Block Diagram

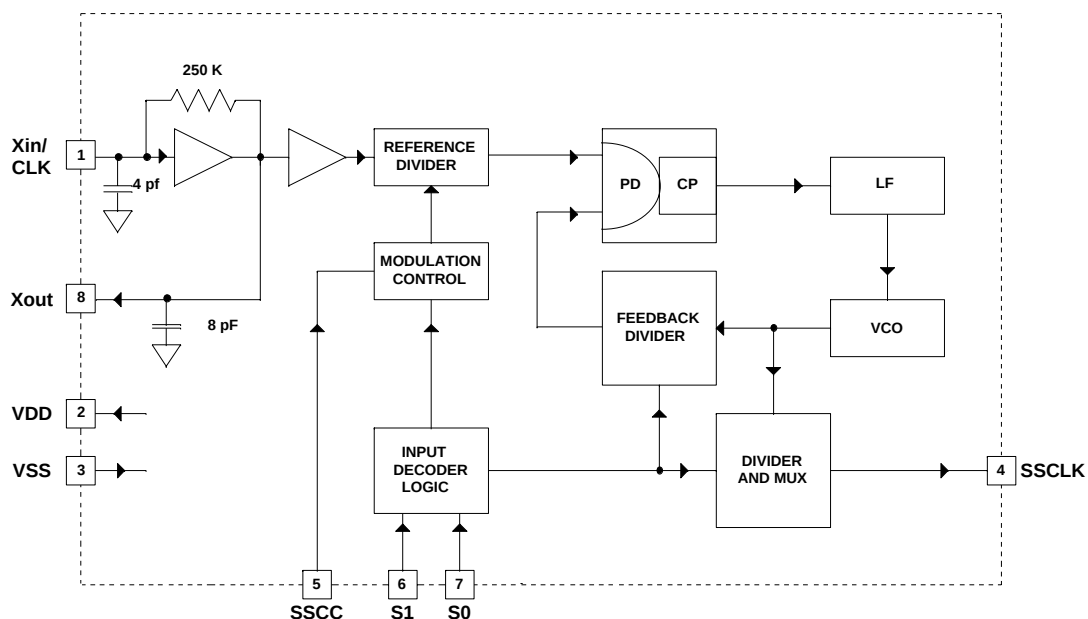


Figure 1. Block Diagram

Ordering Information

Part No.	Package	Operating Temperature Range
SM562BZ	8 Pin SOIC	0 to 70°C

Pin Configuration

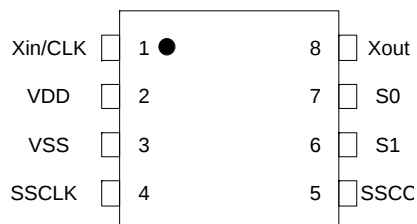


Figure 2. Pin Configuration

Pin Description

Pin #	Symbol	Type	Description
1	Xin/CLK	I	Clock or Crystal connection input. Refer to table 2 for input frequency and bandwidth range selections.
2	VDD	P	Power supply positive connection.
3	GND	P	Power supply negative connection.
4	SSCLK	O	SSCG modulated clock output.
5	SSCC	I	Spread Spectrum Clock Control (Enable/Disable) function. SSCG function is enabled when input is high and disabled when input is low. This pin is pulled high internally.
6	S1	I	Tri-Level Logic input control pin used to select Frequency and Bandwidth. Refer to page 4 for programming details. This pin does not have an internal pull-up or pull-down resistor.
7	S0	I	Tri-Level Logic input control pin used to select Frequency and Bandwidth. Refer to page 4 for programming details. This pin does not have an internal pull-up or pull-down resistor.
8	Xout	O	Oscillator output pin connected to crystal. Leave this pin unconnected when Xin/CLK is driven by an external clock source.

Table 1. Pin Description

Frequency and Spread % Selection

54– 108 MHz (Low Range)

Input Frequency (MHz)	S1=M S0=M	S1=M S0=0	S1=1 S0=0	S1=0 S0=0	S1=0 S0=M	Select the Frequency and Spread % desired and then set S1, S0 as indicated.
54– 60	3.6	3.1	2.6	2.1	1.8	←
60 – 70	3.5	3.0	2.5	2.0	1.7	
70 – 80	3.3	2.8	2.4	1.9	1.6	
80 - 100	3.0	2.5	2.1	1.7	1.4	
100 - 108	2.6	2.3	1.9	1.5	1.3	

108 – 200 MHz (High Range)


Input Frequency (MHz)	S1=1 S0=M	S1=0 S0=1	S1=1 S0=1	S1=M S0=1	Select the Frequency and Spread % desired and then set S1, S0 as indicated.
108 – 120	2.3	1.7	1.1	0.9	←
120 – 130	2.3	1.7	1.1	0.9	
130 – 140	2.3	1.7	1.1	0.9	
140 – 150	2.2	1.6	1.1	0.9	
150 - 160	2.1	1.5	1.0	0.8	
160 – 170	2.0	1.5	0.9	0.8	
170 - 180	1.9	1.4	0.9	0.7	
180 – 190	1.8	1.3	0.8	0.7	
190 - 200	1.7	1.2	0.7	0.6	

Table 2. Frequency and Spread % Selection

Tri-Level Logic

With binary logic, 4 states can be programmed with 2 control lines where as Tri-Level Logic can program 9 logic states using 2 control lines. Tri-Level Logic in the SM562 is implemented by defining a third logic state in addition to the standard logic “1” and “0”. Pin 6 and 7 of the SM562 recognize a logic state by the voltage applied to the respective pin. These states are defined as “0” (Low), “M” (Middle) and “1” (High). Each of these states have a defined voltage range that is interpreted by the SM562 as a “0”, “M” or “1” logic state. Refer to table 5 for voltage ranges for each logic state. By using two equal value resistors (typically 20K) the “M” state can be easily programmed. Pins 6 or 7 can be tied directly to ground or VDD for Logic “0” or “1” respectively. Pins 6 and 7 do not have internal pull-up or pull-down resistors.

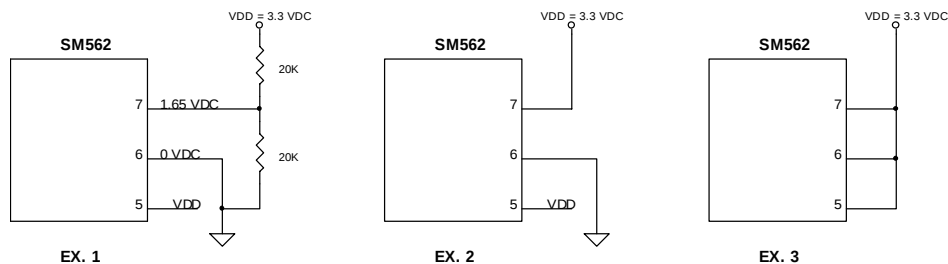See examples below;



**Spread Spectrum Clock Generator****Absolute Maximum Ratings**

Supply Voltage (AVDD or DVDD): +6V

AVDD - DVDD: +/-300mV

AGND - DGND: +/-300mV

Junction Temperature (10-sec. soldering): +300°C

Operating Temperature: 0 to 70°C

Storage Temperature: -65 to +150°C

Note: Operation at any Absolute Maximum Rating is not implied.**DC Electrical Characteristics**

Test Conditions: VDD=3.3V, Temp. =25°C and CL (Pin 4) =15pF, unless otherwise noted.

Symbol	Parameter	Min.	Typ.	Max.	Unit	Conditions
VDD	Power Supply Range	2.97	3.3	3.63	V	+/- 10 %
VINH	Input High Voltage	0.85VDD	VDD	VDD	V	S0 and S1 only.
VINM	Input Middle Voltage	0.40VDD	0.50VDD	0.60VDD	V	S0 and S1 only.
VINL	Input Low Voltage	0.0	0.0	0.15VDD	V	S0 and S1 only.
VOH1	Output High Voltage	2.4	-	-	V	IOH = 6 ma
VOH2	Output High Voltage	2.0	-	-	V	IOH = 20 ma
VOL1	Output Low Voltage	-	-	0.4	V	IOH = 6 ma
VOL2	Output Low Voltage	-	-	1.2	V	IOH = 20 ma
Cin1	Input Capacitance	3	4	5	pF	Xin/CLK (Pin 1)
Cin2	Input Capacitance	6	8	10	pF	Xout (Pin 8)
Cin2	Input Capacitance	3	4	5	pF	S0, S1, SSCC (Pins 7,6,5)
IDD1	Power Supply Current	-	35	45	ma	Fin = 65 MHz, CL = 15 pF.
IDD2	Power Supply Current	-	50	56	ma	Fin = 200 MHz, CL = 33 pF.
IDD3	Power Supply Current	-	48	54	Ma	Fin = 200 MHz, No Load.

Table 5**Electrical Timing Characteristics**

Test Conditions: VDD=3.3V, T=25°C and CL=15pF unless otherwise noted.

Rise/Fall @ 0.4 – 2.4 volts, Duty @ 1.5 volts.

Symbol	Parameter	Min.	Typ.	Max.	Unit	Conditions
ICLKFR	Input Clock Frequency Range	54		200	MHz	Pk-Pk = 3.0 volts.
TR	Clock Rise Time (Pin 4)	0.70	0.75	0.80	ns	SSCLK1, CL = 15 pF., 200 MHz
TF	Clock Fall Time (Pin 4)	0.70	0.75	0.80	ns	SSCLK1, CL = 15 pF., 200 MHz
TR	Clock Rise Time (Pin 4)	1.40	1.50	1.60	ns	SSCLK1, CL = 33 pF., 200 MHz
TF	Clock Fall Time (Pin 4)	1.65	1.75	1.85	ns	SSCLK1, CL = 33 pF., 200 MHz
DTYin	Input Clock Duty Cycle	20	50	80	%	XIN/CLK (Pin 1)
DTYout	Output Clock Duty Cycle	45	50	55	%	SSCLK1 (Pin 4)
FM1	Frequency Modulation	29.5	30.0	30.5	kHz	Fin = 70 MHz
FM2	Frequency Modulation	85.0	85.4	86.0	kHz	Fin = 200 MHz
JCC1	Cycle-to-Cycle Jitter	-	150	175	ps	Fin = 54 MHz, Mod ON
JCC2	Cycle-to-Cycle Jitter	-	175	200	ps	Fin = 120 MHz, Mod ON
JCC3	Cycle-to-Cycle Jitter	-	250	300	ps	Fin = 200 MHz, Mod ON

Table 6

Spread Spectrum Clock Generator

SSCG Theory of Operation

The SM562 is a Phase-Locked Loop (PLL) type clock generator using a proprietary Cypress design to modulate the reference clock. By precisely controlling the bandwidth of the output clock, the SM562 becomes a Low EMI clock generator. The theory and detailed operation of the SM562 will be discussed in the following sections.

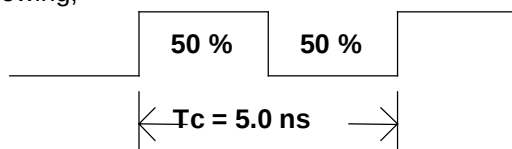
EMI

All digital clocks generate unwanted energy in their harmonics. Conventional digital clocks are square waves with a duty cycle that is very close to 50 %. Because of this 50/50-duty cycle, digital clocks generate most of their harmonic energy in the odd harmonics, i.e.; 3rd, 5th, 7th etc. It is possible to reduce the amount of energy contained in the fundamental and odd harmonics by increasing the bandwidth of the fundamental clock frequency. Conventional digital clocks have a very high Q factor, which means that all of the energy at that frequency is concentrated in a very narrow bandwidth, consequently, higher energy peaks. Regulatory agencies test electronic equipment by the amount of peak energy radiated from the equipment. By reducing the peak energy at the fundamental and harmonic frequencies, the equipment under test is able to satisfy agency requirements for Electro-Magnetic Interference (EMI). Conventional methods of reducing EMI have been to use shielding, filtering, multi-layer PCB's etc. The SM562 uses the approach of reducing the peak energy in the clock by increasing the clock bandwidth, thus, lowering the Q.

SSCG

SSCG uses a patented technology of modulating the clock over a very narrow bandwidth and controlled rate of change, both peak and cycle to cycle. The SM562 takes a narrow band digital reference clock in the range of 54 - 200 MHz and produces a clock that sweeps between a controlled start (F1) and stop (F2) frequency at a precise rate of change. To understand what happens to a clock when SSCG is applied, consider a 200 MHz clock with a 50 % duty cycle. From a 200 MHz clock we know the following;

Clock Frequency = $f_c = 200 \text{ MHz}$.
Clock Period = $T_c = 1/200 \text{ MHz} = 5.0 \text{ ns}$.



If this clock is applied to the Xin/CLK pin of the SM562, the output clock at pin 4 (SSCLK) will be sweeping back and forth between two frequencies. These two frequencies, F1 and F2, are used to calculate the total amount of spread or bandwidth applied to the reference clock at pin 1. As the clock is making the transition, sweep, from F1 to F2, the amount of time and sweep waveform become a very important factor in the amount of EMI reduction realized from an SSCG clock.

The modulation domain analyzer is used to visualize the sweep waveform and sweep period. Figure 3 shows the modulation profile of a 200 MHz SSCG clock. Notice that the actual sweep waveform is not a simple sine or sawtooth waveform. Figure 3 also shows a scan of the same SSCG clock using a spectrum analyzer. The spectrum analyzer scan in figure 3 shows a 10 dB reduction in the peak RF energy when using the SM562 SSCG clock.

Spread Spectrum Clock Generator

Modulation Rate

Spectrum Spread Clock Generators utilize frequency modulation (FM) to distribute energy over a specific band of frequencies. The maximum frequency of the clock (Fmax) and minimum frequency of the clock (Fmin) determine this band of frequencies. The time required to transition from Fmin to Fmax and back to Fmin is the period of the Modulation Rate, T_{mr}. Modulation Rates of SSCG clocks are generally referred to in terms of frequency or F_{mod} = 1/T_{mod}.

The input clock frequency, F_{in}, and the internal divider count, C_{div}, determine the Modulation Rate. In some SSCG clock generators, the selected range determines the internal divider count. In other SSCG clocks, the internal divider count is fixed over the operating range of the part. The SM562 has a fixed divider count of 2332.


Device	Cdiv
SM562	2332 (All Ranges)

Example:

Device = SM562
 Fin = 200 MHz
 Range = S1 = 1, S0 = 1


Then;

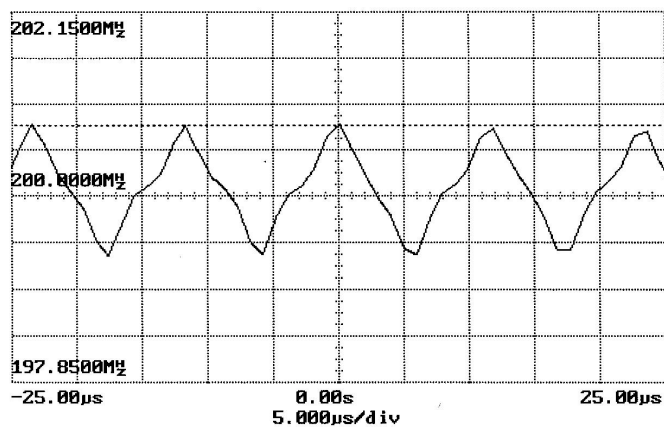Modulation Rate = F_{mod} = 200 MHz/2332 = 85.7 kHz.




Min	199.311MHz	Max	200.840MHz
Rate	85.36kHz	Pk-Pk	1.529MHz

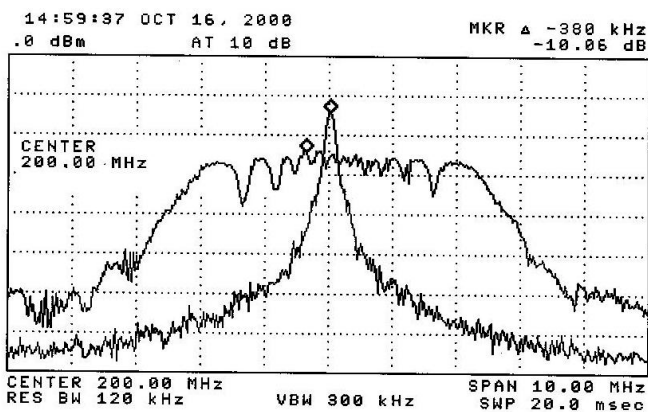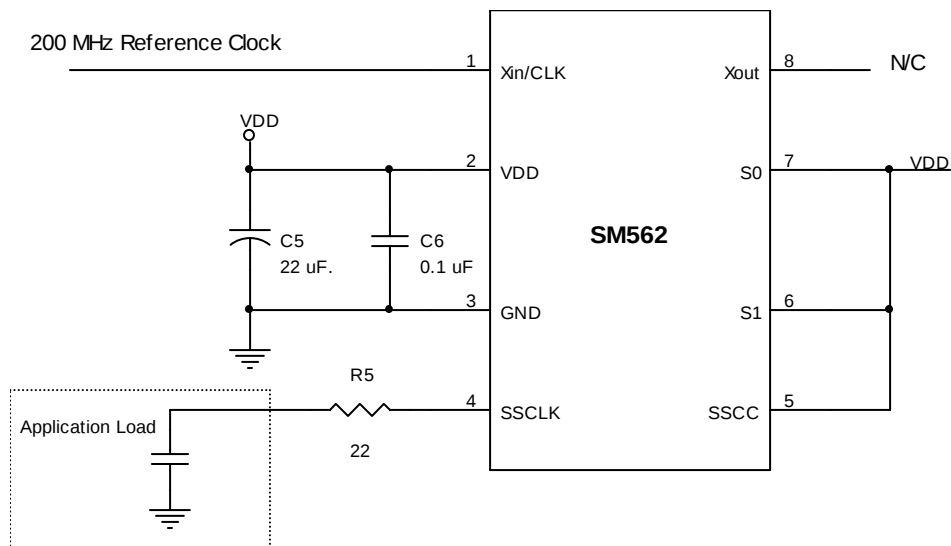Modulation Profile



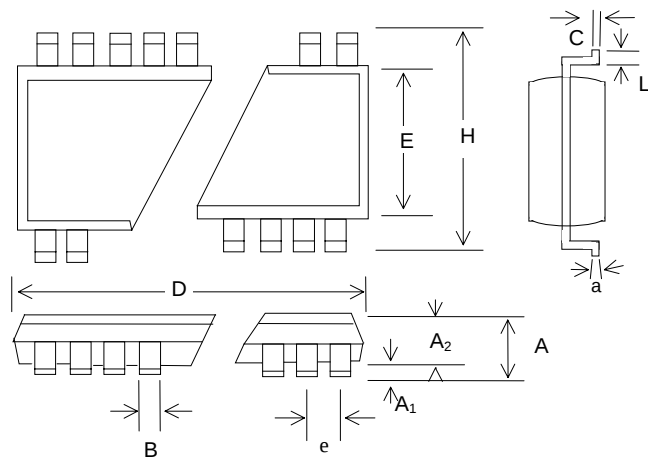
Spectrum Analyzer

Figure 3. SSCG Clock, SM562, F_{in} = 200 MHz

SM562 Application Schematic

Figure 4. Application Schematic

The schematic in figure 4 above demonstrates how the SM562 is configured in a typical application. This application is using a 200 MHz reference clock connected to pin 1. Because an external reference clock is used, pin 8 (Xout) is left unconnected.

This configuration depicts the profile and spectrum scans shown in figure 3. Note that $S0 = S1 = 1$, for a spread of approximately 0.7 %.

8 PIN SOIC Packing Drawing

8 Pin SOIC Outline Dimensions

SYMBOL	INCHES			MILLIMETERS		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.053	-	0.069	1.35	-	1.75
A ₁	0.004	-	0.010	0.10	-	0.25
A ₂	0.047	-	0.059	1.20	-	1.50
B	0.013	-	0.020	0.33	-	0.51
C	0.007	-	0.010	0.19	-	0.25
D	0.189	-	0.197	4.80	-	5.00
E	0.150	-	0.157	3.80	-	4.00
e	0.050 BSC			1.27 BSC		
H	0.228	-	0.244	5.80	-	6.20
L	0.016	-	0.050	0.40	-	1.27
a	0°	-	8°	0°	-	8°

Notes:



APPROVED PRODUCT

SM562

Spread Spectrum Clock Generator

NOTICE

Cypress Semiconductor Corporation reserves the right to make changes to its products in order to improve design, performance or reliability. Cypress Semiconductor Corporation assumes no responsibility for the use of its products in life supporting and medical applications where the failure or malfunction of the product could cause failure of the life supporting and medical systems. Products are not authorized for use in such applications unless a written approval is requested by the manufacturer and an approval is given in writing by Cypress Semiconductor Corporation for the use of its products in the life supporting and medical applications.



APPROVED PRODUCT

SM562

Spread Spectrum Clock Generator

Document Title: SM562 Spread Spectrum Clock Generator

Document Number: 38-07022

Rev.	ECN No.	Issue Date	Orig. of Change	Description of Change
**	106950	06/06/01	IKA	Convert from IMI to Cypress