


Miniature, Ceramic, Surface Mount, Tristate HCMOS Oscillators

SM996 • SM997



FEATURES

- Ceramic/seam sealed package
- TTL/CMOS compatible
- Reflow solderable at 260°C for 10 seconds
- Tristate enable/disable
- Can be used as standard HCMOS oscillator by not connecting Pin #1
- 16mm tape & reel: 500pcs/reel Std or Bulk [<500pcs]


APPLICATIONS

- Wireless RF
- PCMCIA
- Cameras
- Disk Drives
- PDAs

SPECIFICATIONS

	SM996	SM997
Frequency Range	1.5 ~ 100.0 MHz	1.5 ~ 125.0 MHz
Supply Voltage	5.0 VDC \pm 0.5 V	3.3 VDC \pm 0.3 V
Symmetry	60/40% at 1/2 Vcc max 55/45% available	60/40% at 1/4 Vcc max 55/45% available
Input Current (MHz: mA max)	1.5 ~ 20.0 : 20 20.1 ~ 70.0 : 40 70.1 ~ 80.0 : 60	1.6 ~ 20.0 : 10 20.1 ~ 70.0 : 20 70.1 ~ 90.0 : 35 90.1 ~ 120.0 : 45
Rise & Fall Time (MHz: nS max)	1.5 ~ 25.0 : 10 25.1 ~ 70.0 : 8	1.5 ~ 25.0 : 10 25.1 ~ 70.0 : 8 70.0 ~ 120.0 : 5
Load Capacitance	15 pF standard (50 pF available)	
Start up Time	5.0 mS max	
Frequency Stability	\pm 100ppm standard (\pm 25ppm available)	
Oper Temp Range	0°C to 70°C standard (-40°C to 85°C available)	
Logic "0" Level	10% of Vcc max	
Logic "1" Level	80% of Vcc min	
E/D Phase Delay	100 nS max	

Monitor has a proven track record as a pioneer manufacturer in the frequency control market. If our extensive selection of standard and engineered crystals and oscillators does not meet your spec, we will work with you towards a customized solution.

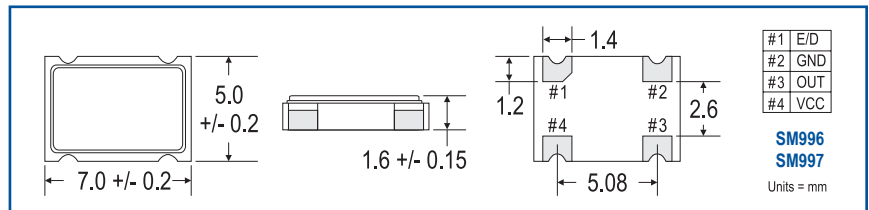


Monitor Products Company Inc reserves the right to make changes to its products and product specifications without notice. No liability is assumed as a result of their use or application.

SM996 • SM997


ENVIRONMENTAL PERFORMANCE SPECIFICATIONS

Operating Temp Range	0°C to 70°C standard (-40°C to 85°C available)
Storage Temp Range	-55°C to 125°C
Vibration	MIL-STD-202F Method 204, 35G, 50 to 2000 Hz
Shock	MIL-STD-202F Method 213B Test Cond E, 1000G, 1/2 Sine Wave
Humidity	85% RH, 85°C, 48 Hours
Hermetic Seal	Leak Rate 2×10^{-8} ATM-cm ³ /sec max
Solderability	MIL-STD-202F Method 208E
MIL-0-55310	Exceeds environmental and electrical specifications of equivalent MIL-0-55310
Packaging	16mm Tape & Reel (500pcs/reel standard, or Bulk <500pcs)

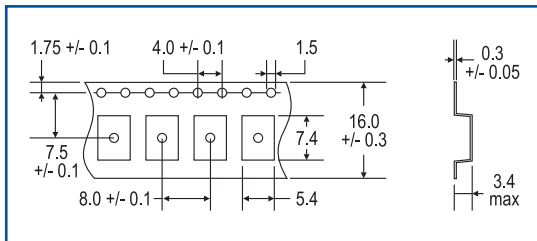


TAPE DIMENSIONS


Units : mm

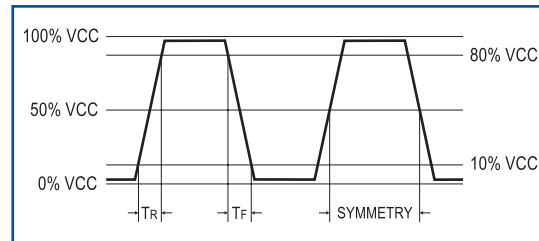

TYPICAL OUTPUT WAVEFORM

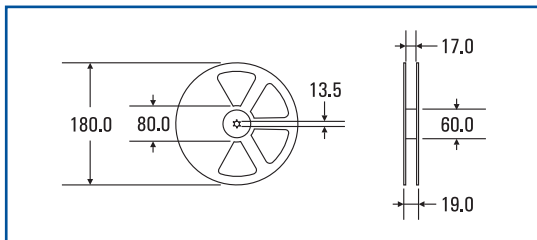

REEL DIMENSIONS (500pcs/reel std)

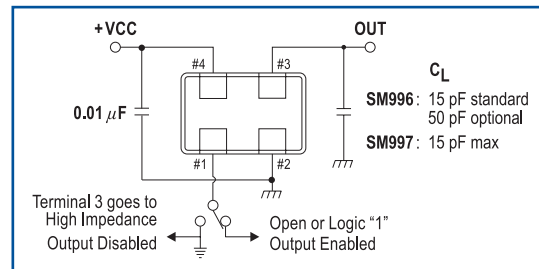

TEST CIRCUIT

PART NUMBERING KEY

Sample Part Numbers

SM99621B2E @ 19.44 MHz	=	SM996	21	B	2	E	19.44
SM99722E2A @ 22.0 MHz	=	SM997	22	E	2	A	22.0

* Standard

Call plant for additional options. Use full descriptive part number when ordering. Parts will be marked with series and frequency only.

Monitor Products Company Inc reserves the right to make changes to its products and product specifications without notice. No liability is assumed as a result of their use or application.