



Technical Specification for 2.5Gbps Fiber Optic Receiver Module

SDT9308-R

- | | | |
|--|--|--|
| ☐ 155.52Mb/s | ☐ 622.08Mb/s | ☒ other <u>0.1 ~ 2.7Gbps</u> |
| ☒ Short Haul | ☐ Long Haul | ☐ other _____ |
| ☒ Intermediate Reach | ☐ Long Reach | ☐ other _____ |
| ☒ Single 5.0 V | ☐ Single 3.3 V | ☐ other _____ |
| ☒ 1.3 μ m | ☒ 1.55 μ m | ☐ other _____ |
| ☐ Transmitter | ☒ Receiver | ☐ Transceiver |
| | (☒ 2R / ☐ 3R) | (☐ 2R / ☐ 3R) |



Sumitomo Electric reserves the right to make changes in this specification without prior notice.

#Safety Precaution Symbols This specification uses various picture symbols to prevent possible injury to operator or other persons or damage to properties for appropriate use of the product. The symbols and definitions are as shown below. Be sure to be familiar with these symbols before reading this specification.

	Warning	Wrong operation without following this instruction may lead to human death or serious injury.
	Caution	Wrong operation without following this instruction may lead to human injury or property damage.

indicates prohibition of actions. Action details are explained thereafter.

indicates compulsory actions or instructions. Action details are explained thereafter.

1. General

The features of SDT9308-R are listed below:

- * SDH STM-16 I-16, S-16.1 & S-16.2 / SONET OC-48 SR-1, IR-1 & IR-2 Compliant
- * Power Supply Voltage Single +5V
- * Low Power Supply Current 100mA(typ.)
- * Compact Package Size 58.4 X 26.8 X 8.5 mm
- * Differential PECL output
- * Signal Detect (FLAG) Function
- * Optical Input Power Monitor Function
- * Optical Connector Interface FC / SC connector

2. Block Diagram

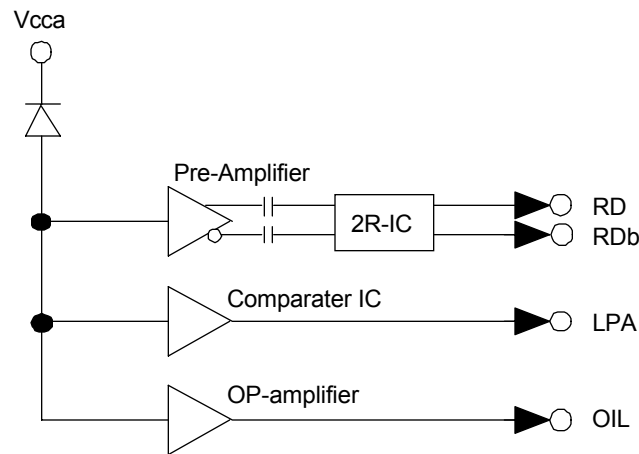


Figure 1 Block Diagram

3. Package Dimension

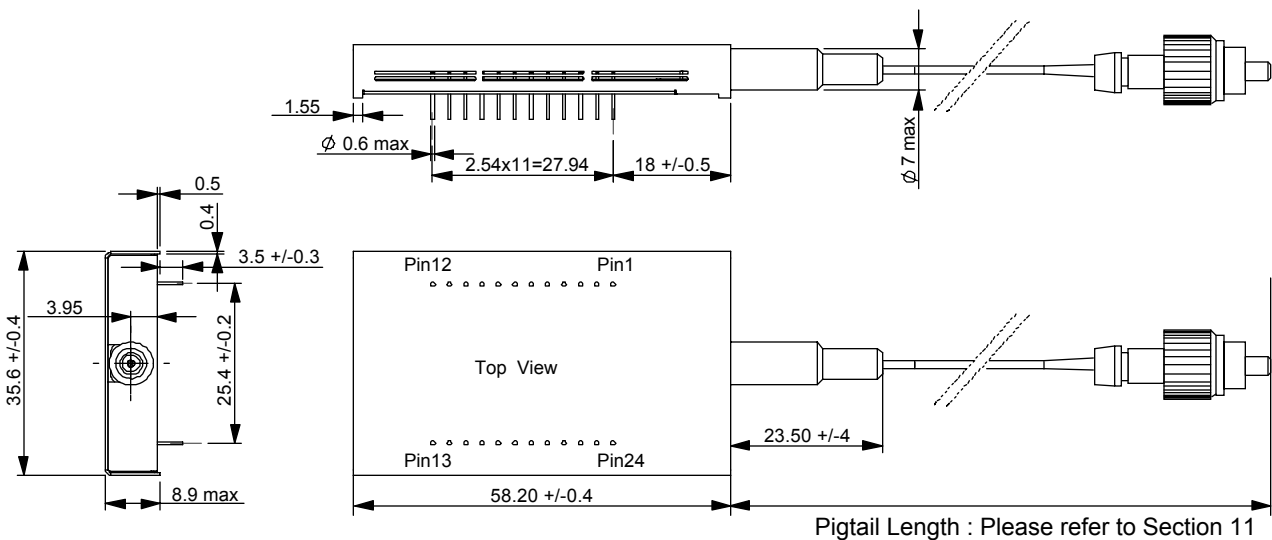


Figure 2 Package Dimension

⚠ Caution



Do not disassemble this product. Otherwise, failure, electrical shock, overheating or fire may occur.

Handle the lead pins carefully. Use assisting tools or prospective aids as required. A lead pin may injure skin or human body

4. Pin Assignment

No.	Symbol	Function	No.	Symbol	Function
1	NIC	No Internal Connection	24	NUC	No User Connection
2	NUC	No User Connection	23	OIL	Optical Input Level
3	LPA	Loss of Power Alarm	22	Vcca	Positive power supply (Analogue)
4	GND	Ground	21	NUC	No User Connection
5	NIC	No Internal Connection	20	GND	Ground
6	NIC	No Internal Connection	19	GND	Ground
7	GND	Ground	18	NIC	No Internal Connection
8	Vccd	Positive power supply (Digital)	17	GND	Ground
9	GND	Ground	16	GND	Ground
10	RD	True data output	15	GND	Ground
11	RDb	False data output	14	GND	Ground
12	GND	Ground	13	NUC	No User Connection

5. Absolute Maximum Ratings

Parameter	Symbol	min.	Max	Unit	Note
Storage Case Temperature	Ts	-40	85	°C	1
Operating Case Temperature	Tc	-5	75	°C	
Supply Voltage	Vccd, Vcca	0.0	6.0	V	2
Maximum Input Power	Pmax		3	dBm	
Lead Soldering (Temperature) (Time)			260 10	°C sec.	3

Note 1. No condensation allowed. 2. GND=0.0V

3. Measured on lead pin at 2mm (0.079in.) off the package bottom

Warning

 Use the product with the rated voltage described in the specification. If the voltage exceeds the maximum rating, overheating or fire may occur.

Caution

 Do not store the product in the area where temperature exceeds the maximum rating, where there is too much moisture or dampness, where there is acid gas or corrosive gas, or other extreme conditions. Otherwise, failure, overheating or fire may occur.

6. Electrical Interface

(Unless otherwise specified, V_{cca} , V_{ccd} = 4.75 to 5.25 V, @2488.32Mbps, PRBS2²³-1, 50% duty and all operating temperature shall apply.)

Parameter		Symbol	Min.	Typ.	Max.	Unit	Note
Supply Voltage		V_{cca} , V_{ccd}	4.75	5.00	5.25	V	
Supply Current (V_{cca} and V_{ccd})		I_{dix}		100	150	mA	1, 2
Output Voltage Level (RD, RDb)	High	V_{oh}	$V_{cc}-1.1$		$V_{cc}-0.65$	V	3, 4
	Low	V_{ol}	$V_{cc}-1.8$		$V_{cc}-1.3$	V	3, 4
Output Voltage (LPA)	High	V_{ofgh}	$V_{cc}-0.4$		V_{cc}	V	3
	Low	V_{ofgl}	0		0.40	V	3
Output Signal Rise / Fall Time (RD, RDb, 20% - 80%)		T_{rd}/T_{fd}		130	180	ps	
Input Power Monitor Voltage	@-18dBm	V_{oil}		0.065		V	
	@0dBm	V_{oil}		4.0		V	

1. 2488.32Mbps, PRBS 2²³-1 2. Output current is not included. 3. V_{ccd} , V_{cca} = 5.0V, T_c = 25°C

4. R_I = 50Ω to $V_{cc}-2V$, Single end out.

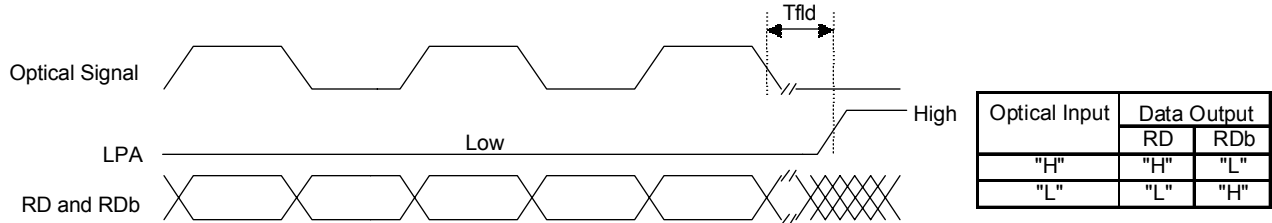


Figure 3 Output Timing Chart

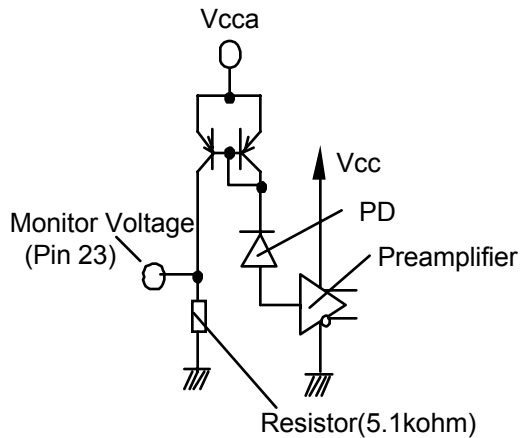


Figure 4 Input Power Monitoring Circuit

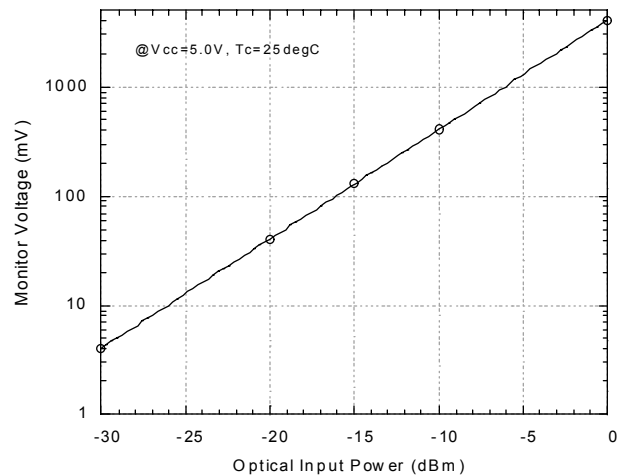


Figure 5 Relation Between Optical Input Power


7. Optical Interface

(Unless otherwise specified, V_{cca} , V_{ccd} = 4.75 to 5.25 V, @2488.32Mbps, PRBS2²³-1, 50% duty and all operating temperature shall apply.)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Bit Rate Range		0.1		2.7	Gbps	
Center Wavelength Range	λ_c	1260		1360	nm	
		1430		1580		
Minimum Sensitivity	P_{min}		-22.0	-18.0	dBm	1
Overload	P_{max}	0			dBm	1
LPA Deassert Level	P_a	-40.0	-23.0	-18.0	dBm	
LPA Assert Level	P_d	-40.0	-25.0	-18.0	dBm	
Hysteresis	Hys	0.5	2.0	6.0	dB	
LPA Deassertion Time	T_{lpa}	2.3		100	μs	2
Optical Reflectance	Or			-27	dB	

1. BER = 10⁻¹⁰ 2. Refer to Figure 4

8. Recommended User Interface

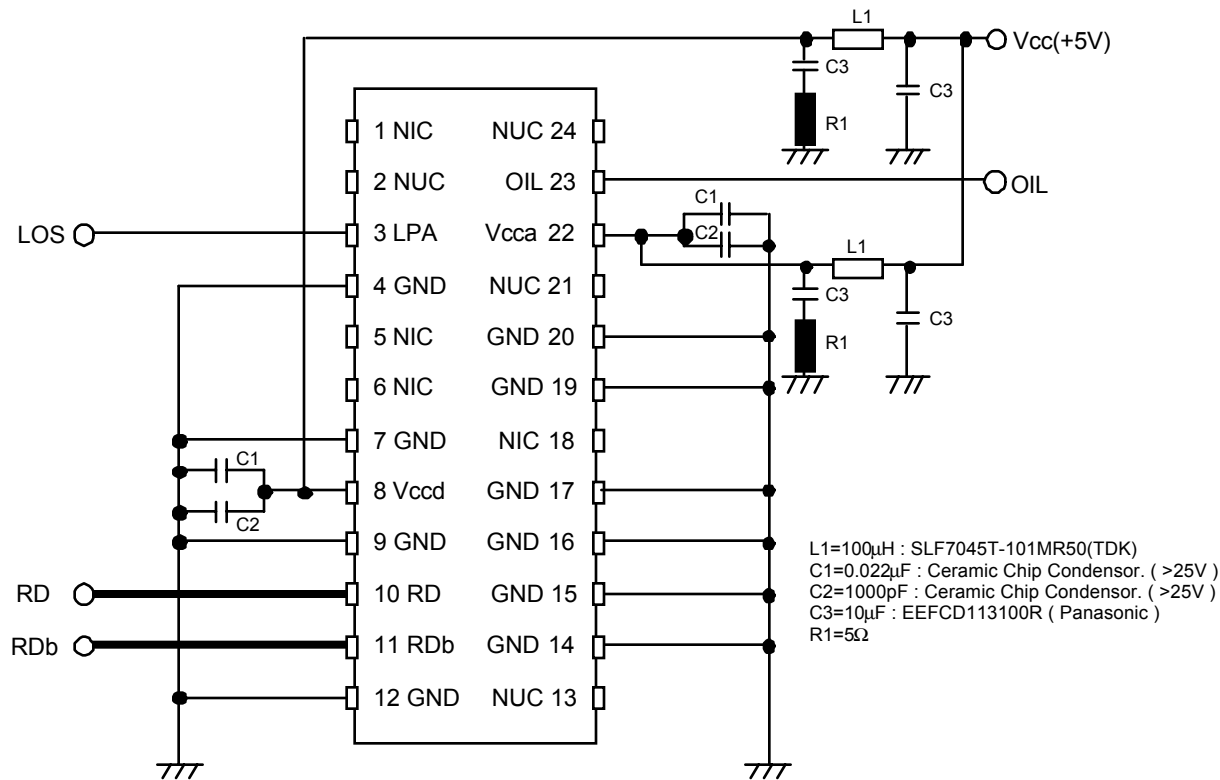

1. Power supply filter should be located as close as possible to the lead pins of module.
2. The impedance of transmission line (RD & RDb) should be 50ohm.
3. Since the transmission line (RD & RDb) are open emitters, termination resistors (1/8W) are necessary. Shown below is the recommendation.

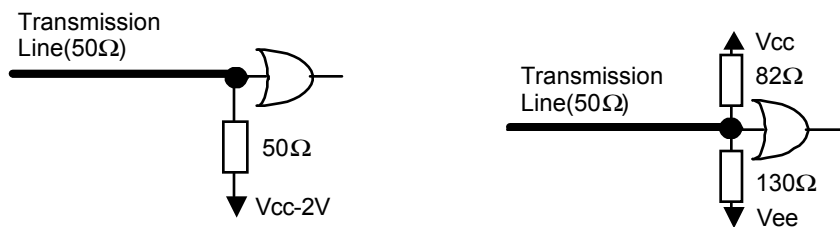


Figure 6 Recommended User Interface

9. Fiber Pigtail Specification

Parameter	Min.	Typ.	Max.	Unit	Note
Core Diameter		9.5		μm	
Cladding Diameter		125		μm	
Outer Diameter		0.9		mm	
Optical Cord Tensile Beak Strength			9.8	N	
Bend Radius	30			mm	

⚠ Caution



Do not give undue force or impact to the optical fiber pigtail. A broken optical fiber may injure skin or human body, or a strong laser beam may cause eye injury. Operate the equipment carefully. Use assisting tools or prospective aids as required.

10. Reliability Test(Plan)

Bellcore TA-NWT-000983 Issue 2, December 1993								
Heading	Test	Reference	Condition	Sampling			SEI Results	
				LTPD	SS	C	SS	F/C
Mechanical Integrity	Mechanical Shock	MIL-STD-883 Method 2002	Condition B					
			5 times/axis					
	Vibration	MIL-STD-883 Method 2007	500G, 1.0 ms	20%	11	0	11	0
			1,500G, 0.5ms	20%	11	0	---	---
			Condition A	20%	11	0	11	0
			20 G					
Endurance	Accel. Aging (High Temp.)	(R)-453 Section 5.18	20-2,000 Hz					
			4 min/cycle; 4 cycles/axis					
	Thermal Shock	MIL-STD-883 Method 1011	$\Delta T=100^{\circ}\text{C}$	20%	11	0	11	0
	Solderability	MIL-STD-883 Method 2003	(steam aging not required)	20%	11	0	11	0
	Fiber Pull		1 Kg; 3 times; 5sec.	20%	11	0	---	---
			2 Kg; 3 times; 5sec.	20%	11	0	---	---
	High Temp. Storage	-----	+85°C; rated power	---	25	---	25	0
			>5,000hrs.	---	10	---	---	---
	Low Temp. Storage	-----	>10,000hrs.					
			max. storage T (T=85°C)	20%	11	0	---	---
	Temperature Cycling	Section 5.20	>2,000					
			min. storage T (T=-40°C)	20%	11	0	11	0
Special Tests	Internal Moisture	MIL-STD-883 Method 1018	>2,000					
			- 40°C to +85°C					
	Damp Heat (if using epoxy)	MIL-STD-202 M103 or IEC 68-2-3	400 times pass/fail	20%	11	0	---	---
			500 times for info.	---	11	---	---	---
	Cyclic Moisture Resistance	Section 5.23	500 times pass/fail	20%	11	0	11	0
			1000 times for info.	---	11	---	11	0
Special Tests	Internal Moisture	MIL-STD-883 Method 1018	40°C , 95%, 56days	20%	11	0	11	0
			or 85°C /85%RH 2,000hrs	20%	11	0	---	---
	ESD Threshold	Section 5.22	-----	20%	11	0	11	0

11. Ordering Information

Connector	Pigtail Length : mm	Tc = 0 ~ 70°C
SC Connector	600 +/- 50	SDT9308-RC-QN
FC / PC Connector	600 +/- 50	SDT9308-RD-QN
FC / PC Connector	990 +/- 100	SDT9308-RD-YN

12. Other Precaution

Under such a strong vibration environment as in automobile, the performance and reliability are not guaranteed.

The governmental approval is required to export this product to other countries. To dispose of these components, the appropriate procedure should be taken to prevent illegal exportation.

This module must be handled, used and disposed of according to your company's safe working practice.

 Warning	
	Be sure to carry out correct soldering for connection to peripheral circuits in order to prevent contact failure or short-circuit. Otherwise, a strong laser beam may cause eye injury, overheating or fire.
	Do not put this product or components of this product into your mouth. This product contains material harmful to health.
 Caution	
	Be sure to turn power off when you touch this product connected to the printed circuit boards. Otherwise, electric shock may occur.
	Dispose this product or equipment including this product properly as an industrial waste according to the regulations.

13. For More Information

U.S.A.

ExcelLight Communications, 4021 Stirrup Creek Drive, Suite 200 Durham, NC 27703

Tel. +1-919-361-1600 / Fax. +1-919-361-1619

E-mail: info@excelight.com

<http://www.excelight.com>

Europe

Sumitomo Electric Europe Ltd., 220, Centennial Park, Elstree, Herts, WD6 3SL, United Kingdom

Tel. +44-208-953-8681

Fax. +44-208-207-5950

E-mail: photonics@sumielectric.com

<http://www.sumielectric.com>

Japan

Sumitomo Electric Industries, Ltd. (International Business Division), 3-12, Moto-Akasaka 1-chome

Minato-ku Tokyo 107-8468

Tel. +81-3-3423-5771 / Fax. +81-3-3423-5099

E-mail: product-info@ppd.sei.co.jp

http://www.sei.co.jp/Electro-optic/index_e.html