

Isolator Coaxial MicPuck™ Model: SC136

Application - SPACE ♦ DEFENSE

- ◆ OEM
- ◆ LNA or Receiver Input/Output
- ◆ 1.2 to 24 GHz

Benefits

- ◆ Excellent Electrical Performance
- ◆ Low Mass 5 g
- ◆ Phased Matched
- ◆ Integral Connector




Features

- ◆ SMA (f) Interface
- ◆ CW or CCW Circulation
- ◆ +/- 90 or 180 Degree Connection
- ◆ Available up to 15% Bandwidth

Specifications

Parameter	Specification			Unit	Parameter	Specification			Unit
Frequency	8000 to 18000			MHz		Min	Typ	Max	
	Min	Typ	Max		Operating Temp.	-20	-	+85	°C
Isolation	23	25	-	dB	Forward Power	-	-	1	W
Insertion Loss	-	0.2	0.25	dB	Reverse Power	-	-	1	W
Return Loss	23	25	-	dB	Interface	SMA (f)			-

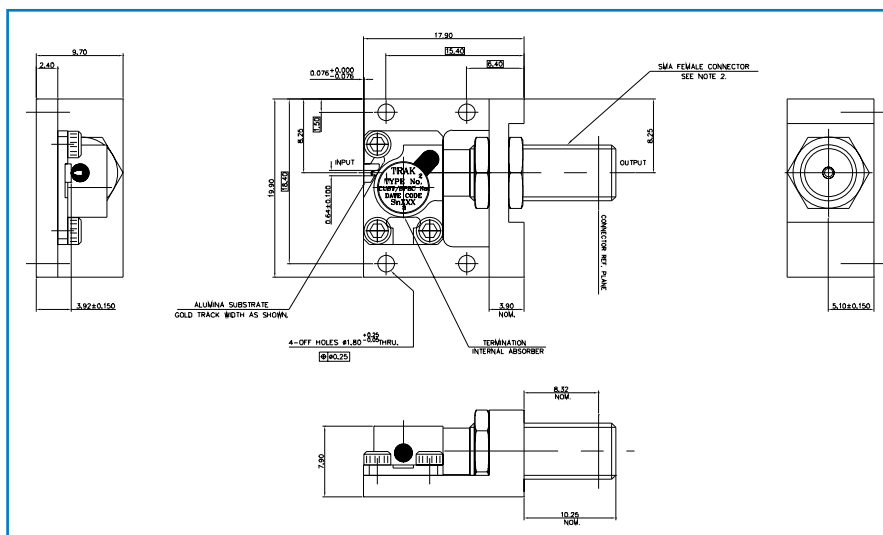

TRAK Microwave Limited
Dunsinane Avenue, Dundee, Scotland DD2 3QF
Phone: +44 (0)1382 833 411 ♦ Fax: +44 (0)1382 833 599
E-mail: trakeurope@trak.com ♦ www.trak.com

