




Sx3-Lx11x MSA 2 x 5 Small Form Factor Optical Transceiver

3.3 Volt, 1320nm LED, Multimode, up to 1.0Km, OC-12 / STM-4

FEATURES

- Complies with 2x5 SFF Multi Source Agreement
- Overall metal shield with spring clip chassis grounds
- Options for 0.55" or 0.60" centerline mounting
- Wave solder and aqueous wash compatible
- Multisourced 2 x 5 transceiver footprint
- PCI Mezzanine Card height compliant
- IEC 825 / CDRH Class 1 compliant
- Duplex LC multimode receptacle
- Single +3.3 V power supply

MSA CENTERLINE MOUNTING OPTIONS

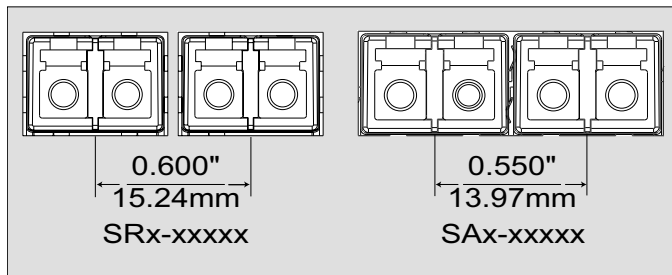

SEE PAGE 11 FOR ORDERING INFORMATION

APPLICATIONS

The Sx3-Lx11x multimode glass optical fiber transceivers provide low profile, cost effective solutions for OC-12 / STM-4 (up to 700 Megabaud, up to 1.0 Km) multimode glass optical fiber data links.

These transceivers are fully compliant with the ITU-T, IEEE, and ANSI standards but they can be used for any other data communications purpose within their operating parameters.

DESCRIPTION

The Sx3-Lx11x fiber optic transceivers consist of transmitter and receiver functions combined in a multisourced 2x5 SFF transceiver module. The optical transmitter is a high output 1320nm LED. The transmitter input lines are driven with LVPECL signals applied to the Transmit (TD+ and TD-) pins. The optical transmitter can be disabled by applying an LVTTTL signal to the Transmit Disable (TDIS) pin.

The optical receiver consists of PIN + preamplifier assembly and a limiting post-amplifier integrated circuit. Outputs from the receiver consist of LVPECL data signals on the Receive (RD+ and RD-) pins and a single ended LVPECL or LVTTTL signal detect function on the Signal Detect (SD) pin.

The 0.550" centerline mounting option incorporates a spring clip optimized for multiport applications where the adjacent transceivers must simultaneously ground to each other while preserving their true positions. The 0.600" centerline mounting option incorporates a different spring clip that is optimized for single port panel openings where no adjacent transceiver will be disturbed by its higher spring forces.

Sx3-Lx11x Small Form Factor Optical Transceiver

3.3 Volt, 1320nm LED, Multimode,
up to 1.0Km, OC-12 / STM-4

ABSOLUTE MAXIMUM RATINGS

Absolute maximum limits mean that no catastrophic damage will occur if the product is subjected to these ratings for short periods, provided each limiting parameter is in isolation and all other parameters have values within the performance specification. It should not be assumed that limiting values of more than one parameter can be applied to the product at the same time.

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Storage Temperature	T_s	-55		+100	° C
Lead Soldering Temperature	T_{SOLD}			+260	° C
Lead Soldering Time	t_{SOLD}			10	Seconds
Supply Voltage	V_{CC}	-0.5		+6.0	V
Data Input Voltage	V_I	-0.5		V_{CC}	V
Differential Input Voltage (p-p)	V_D			2.0	V
Output Current	I_O			50	mA

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Operating Temperature Limit Part Number xxx-xxxx Part Number xxx-xxxxH	T_A	0 -40		+70 +85	° C
Supply Voltage	V_{CC}	+3.135		+3.465	V
TX Differential Input Voltage (p-p)	V_D	0.350	0.800	1.250	V
Transmit Disable Voltage	V_{TD}	$V_{CC} - 1.3$		V_{CC}	V
Transmit Enable Voltage	V_{TEN}	V_{EE}		$V_{EE} + 0.8$	V
RX Data Output Load	R_L		50		Ohms

Sx3-Lx11x Small Form Factor Optical Transceiver

3.3 Volt, 1320nm LED, Multimode,
up to 1.0Km, OC-12 / STM-4

TRANSMITTERS

VCCTX = 3.15V to 3.45V, T_A = Operating Temperature Range

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Baud Rate		100		700	MBaud
Optical Output Power ¹	P_O	-19		-14	dBm
Optical Output Wavelength	λ_{OUT}	1280	1320	1340	nm
Optical Rise Time	t_R	0.7		1.25	ns
Optical Fall Time	t_F	0.9		1.25	ns
Extinction Ratio	ER	10.0			dB
Supply Current	I_{CC}		120	160	mA

1.BER = 10^{-10} @ 622.08 Mbps, PRBS 2²³-1, NRZ, Compliant with Telcordia GR-253 and ITU recommendations G.957 and G.958

RECEIVERS

VCCR_X = 3.15V to 3.45V, T_A = Operating Temperature Range

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Baud Rate		100		700	MBaud
Optical Sensitivity ¹	P_I	-28		-8	dBm
Optical Wavelength	λ_{IN}	1261		1380	nm
Supply Current	I_{CC}		70	120	mA
Signal Detect Assert Time	t_{SDAS}		<10	100	μ S
Signal Detect Deassert Time	t_{SDDA}		<10	350	μ S
Signal Detect Threshold Decreasing Light	LSTD	-45.0		-32.5	dBm
Increasing Light	LSTI	-45.0		-32.0	dBm
Signal Detect Hysteresis	HYS	0.5	2.25	3.5	dB
RX Data Output - Low	$V_{OL} - V_{CC}$	-1.810		-1.475	V
RX Data Output - High	$V_{OH} - V_{CC}$	-1.165		-0.880	V

1.BER = 10^{-10} @ 622.08 Mbps, PRBS 2²³-1, NRZ, Compliant with Telcordia GR-253 and ITU recommendations G.957 and G.958


Sx3-Lx11x Small Form Factor Optical Transceiver

3.3 Volt, 1320nm LED, Multimode,
up to 1.0Km, OC-12 / STM-4

MSA 2x5 SFF TRANSCEIVER PRINTED CIRCUIT BOARD LAYOUT

Top View Shown

Dimensions Are Shown As: $\frac{\text{mm}}{\text{inches}}$

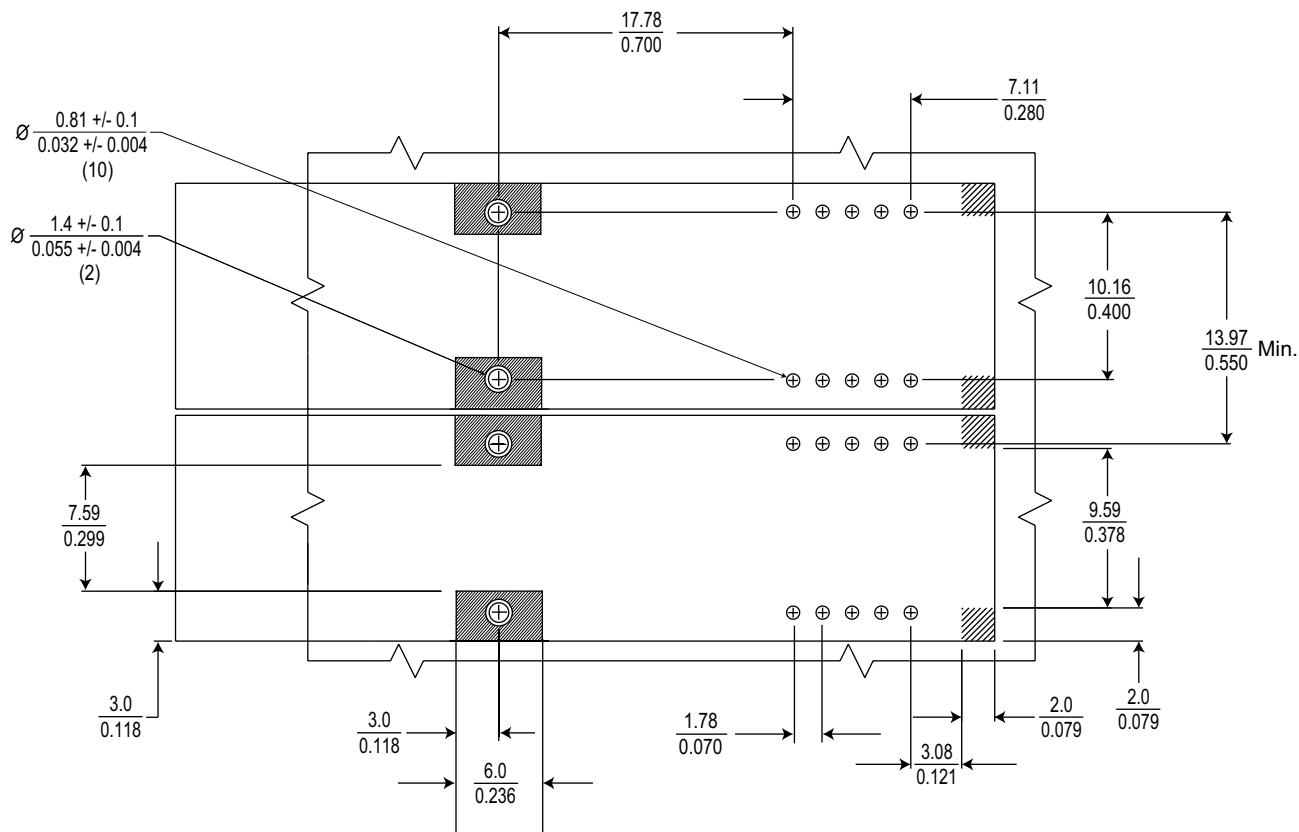

CROSS-HATCHED AREAS SHOULD HAVE NO SIGNAL TRACES ON THE TOP LAYER

Sx3-Lx11x Small Form Factor Optical Transceiver


3.3 Volt, 1320nm LED, Multimode,
up to 1.0Km, OC-12 / STM-4

REGULATORY COMPLIANCE

Requirement	Feature	Condition	Notes
MIL-STD-883-3015.7	ESD	Class II	2200V
IEC-801-2	ESD	Human Body Model	25KV
IEC-801-3	EMI	Immunity	10V/M
FCC	EMI	Class B	>20dB
EN 55022 (CISPR 22A)	EMI	Class B	10V/M
IEC-825 issue 1993-11	Eye Safety	Class 1	TUV Certificate Number R 2171007
FDA CDRH 21-CFR 1040	Eye Safety	Class 1	CDRH Accession Number 9930009



File Number: E209124

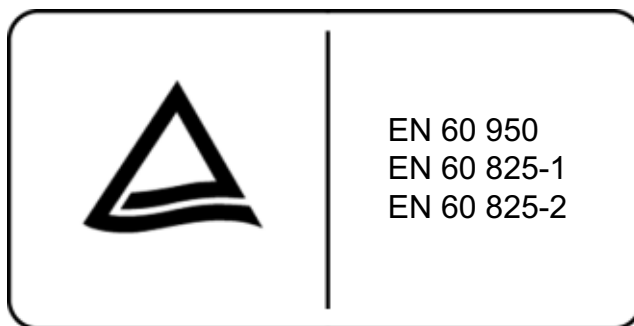


File Number: R 2071075

Sx3-Lx11x Small Form Factor Optical Transceiver

3.3 Volt, 1320nm LED, Multimode,
up to 1.0Km, OC-12 / STM-4

2 x 5 MSA SMALL FORM FACTOR TRANSCEIVER PIN NUMBER ASSIGNMENTS TOP VIEW SHOWN

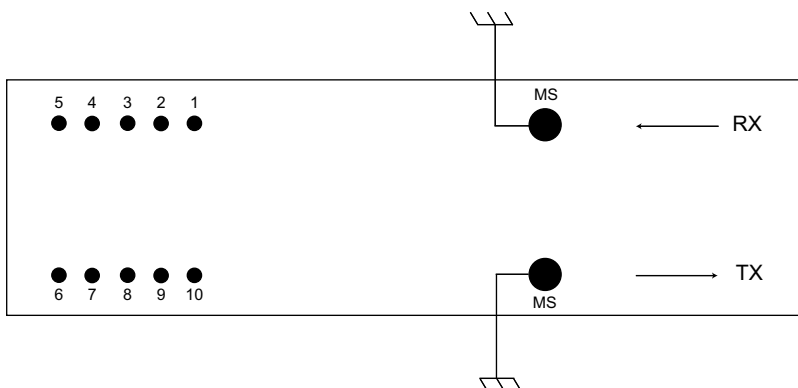


PIN FUNCTIONS

Pin Number	Symbol	Description	Logic Family
MS	MS	Mounting Studs <i>Connect to Chassis Ground</i>	N/A
1	VEERX	Receiver Signal Ground	N/A
2	VCCRX	Receiver Power Supply	N/A
3	SD	Signal Detect <i>Satisfactory Optical Input: Logic "1" Output</i> <i>Fault Condition: Logic "0" Output</i>	Sxx-xPxxx LVPECL Sxx-xTxxx LVTTTL
4	RD-	Receiver DATA Out	LVPECL
5	RD+	Receiver DATA Out	LVPECL
6	VCCTX	Transmitter Power Supply	N/A
7	VEETX	Transmitter Signal Ground	N/A
8	TDIS	Transmitter Disable	LVTTTL
9	TD+	Transmitter DATA In	LVPECL
10	TD-	Transmitter DATA In	LVPECL

Sx3-Lx11x Small Form Factor Optical Transceiver

3.3 Volt, 1320nm LED, Multimode,
up to 1.0Km, OC-12 / STM-4

TRANSCEIVER APPLICATION SCHEMATIC For Interface To +3.3V LVPECL Circuits

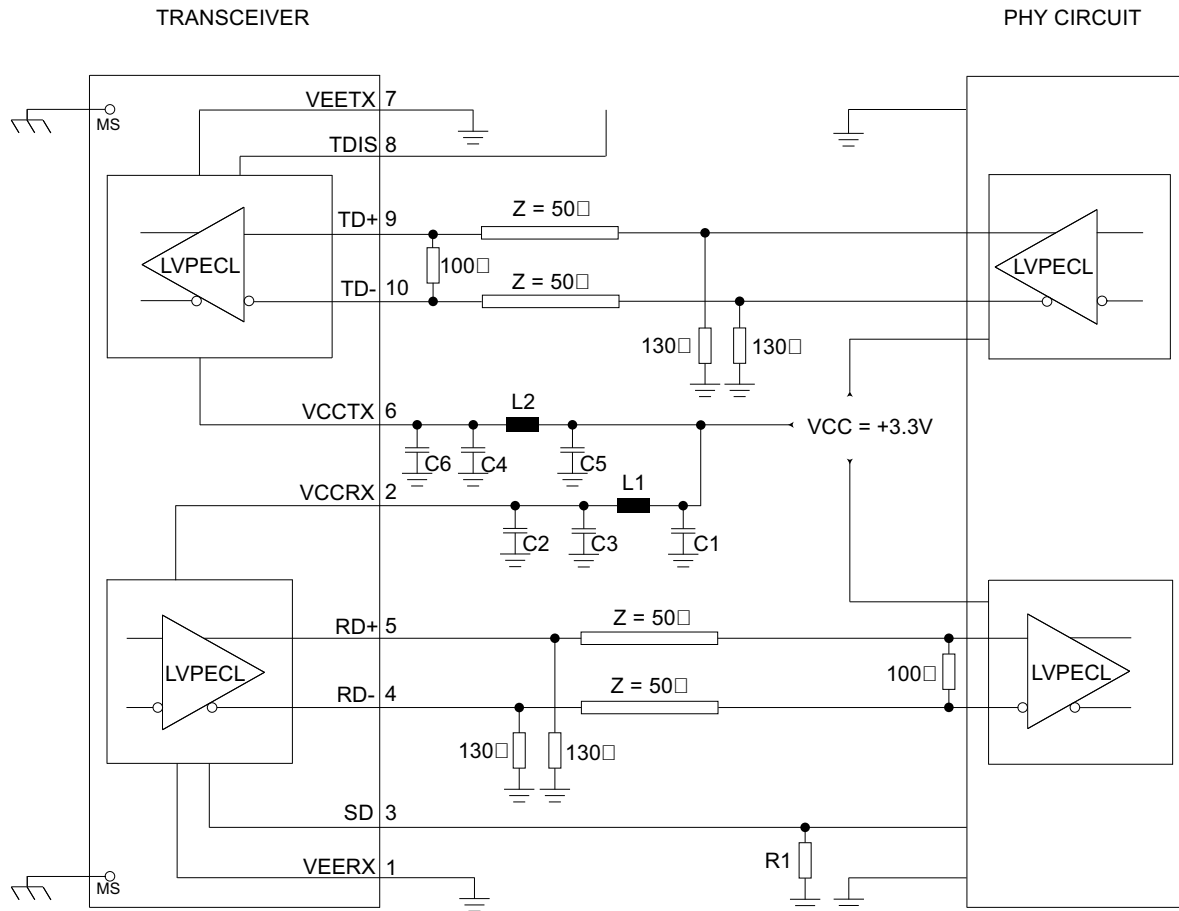


R1 = 150Ω for Sxx-xP1xx / Remove for Sxx-xT1xx
L1, L2 = 1.0μH to 4.7μH*
C1, C2, C6 = 10.0nF
C3, C4, C5 = 4.7μF to 10.0μF
* Or ferrite bead alternative

Sx3-Lx11x Small Form Factor Optical Transceiver

3.3 Volt, 1320nm LED, Multimode,
up to 1.0Km, OC-12 / STM-4

MSA 2 x 5 OUTLINE DIMENSIONS
For SRx-xxxxx 0.600" Center to Center Mounting
Dimensions Are Shown As: $\frac{\text{mm}}{\text{inches}}$

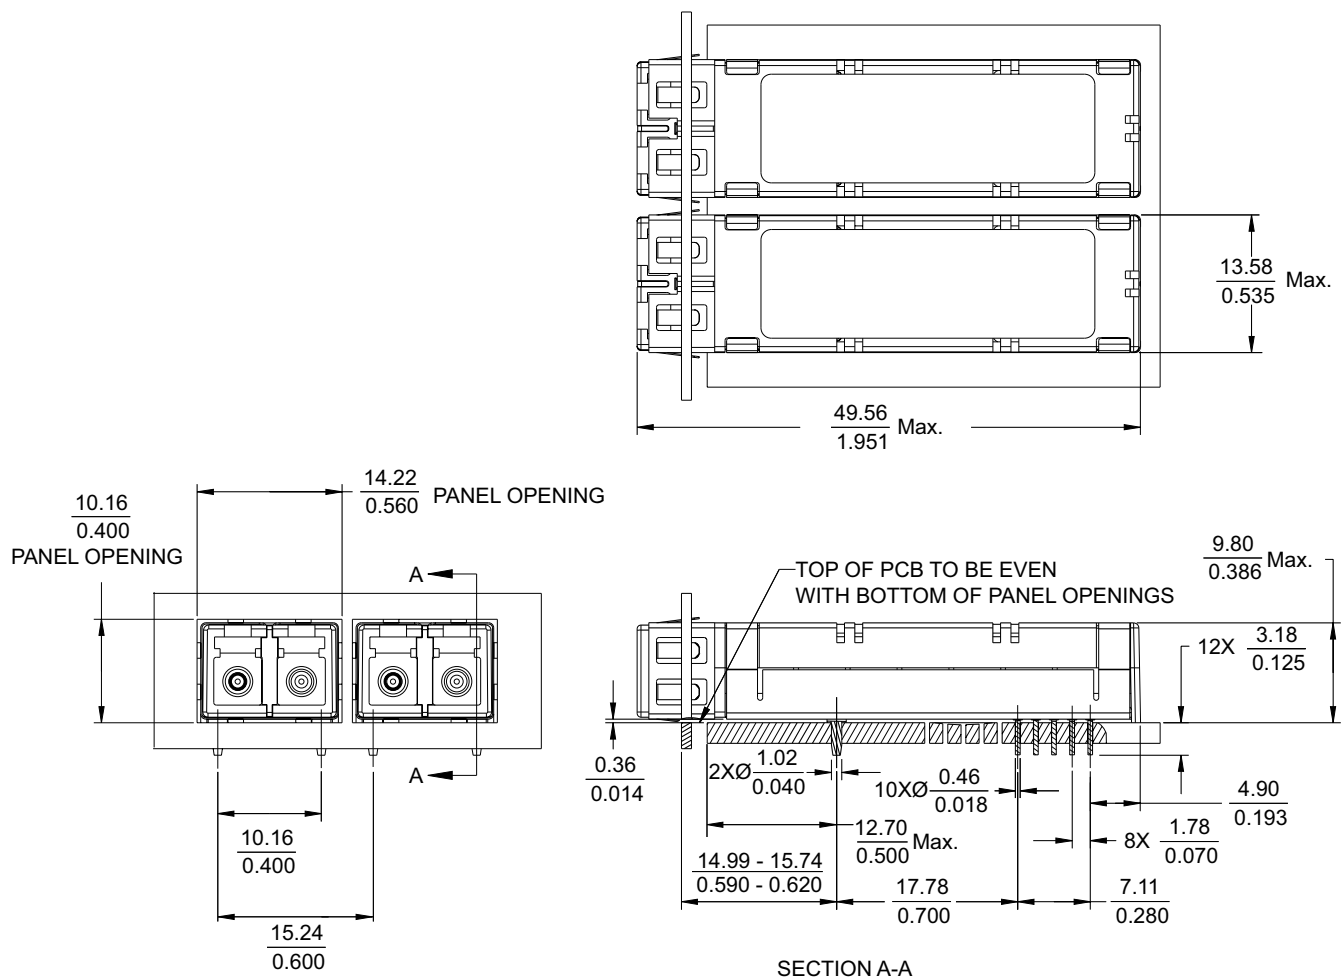


Sx3-Lx11x Small Form Factor Optical Transceiver

3.3 Volt, 1320nm LED, Multimode,
up to 1.0Km, OC-12 / STM-4

MSA 2 x 5 OUTLINE DIMENSIONS For Sx-xxxxx 0.550" Center to Center Mounting

Dimensions Are Shown As: $\frac{\text{mm}}{\text{inches}}$

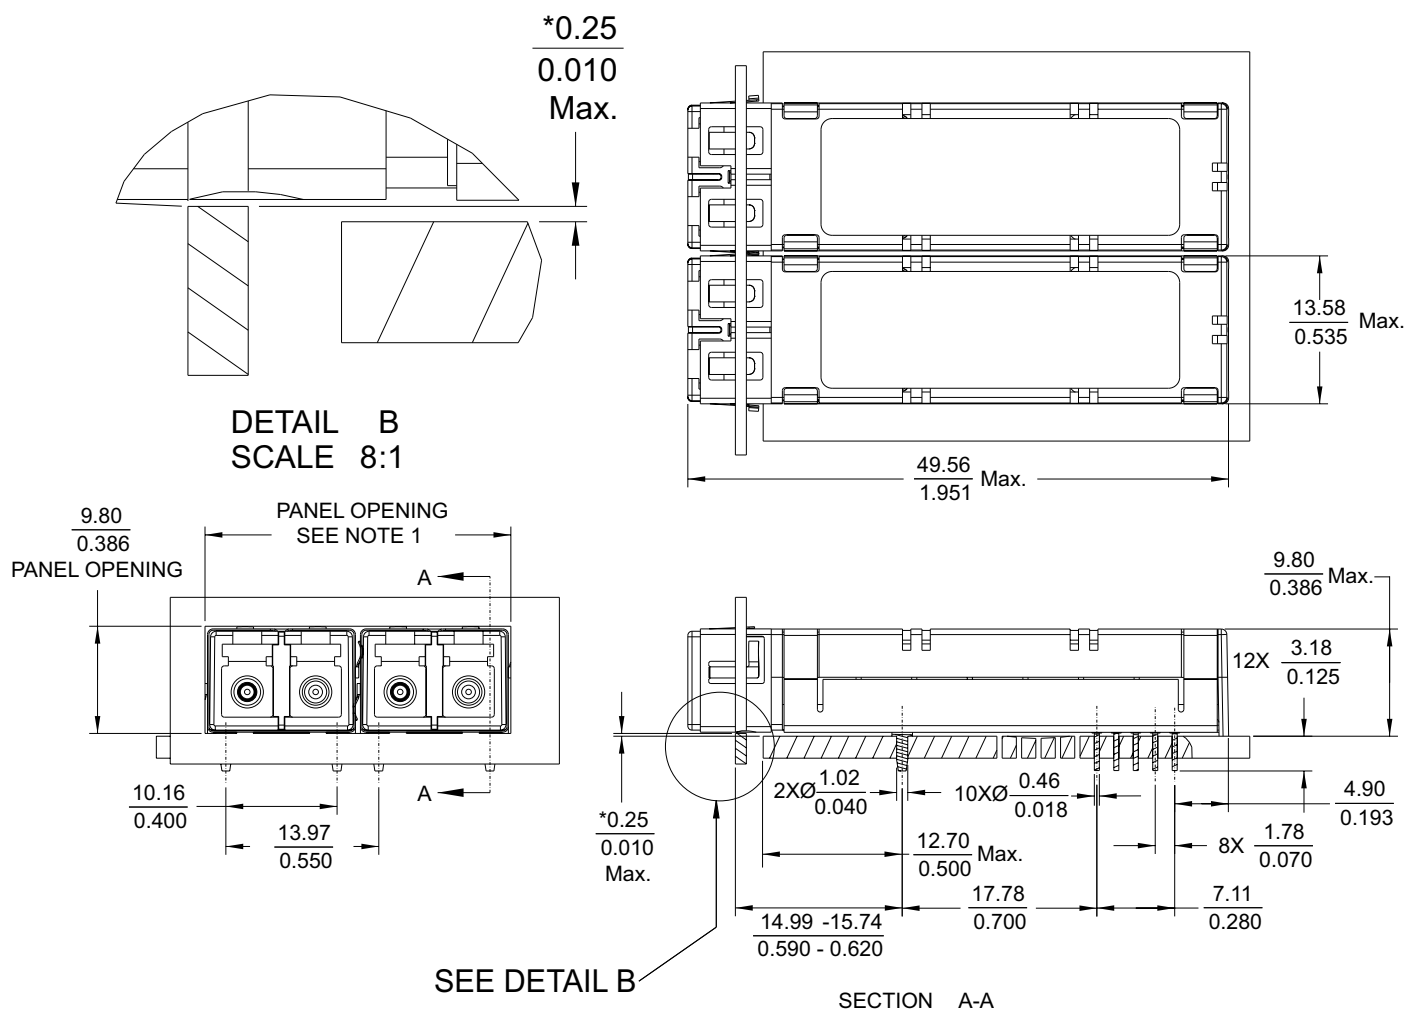

NOTES:

1. PANEL OPENING SIZE = .550" x N WHERE N = NUMBER OF TRANSCEIVERS.
2. *DIMENSION FROM TOP OF PCB TO BOTTOM OF OPENING.


Sx3-Lx11x Small Form Factor Optical Transceiver

3.3 Volt, 1320nm LED, Multimode,
up to 1.0Km, OC-12 / STM-4

MSA 2 x 5 OUTLINE DIMENSIONS

For SNx-xxxxx (No Grounding Clip)

Dimensions Are Shown As: $\frac{\text{mm}}{\text{inches}}$

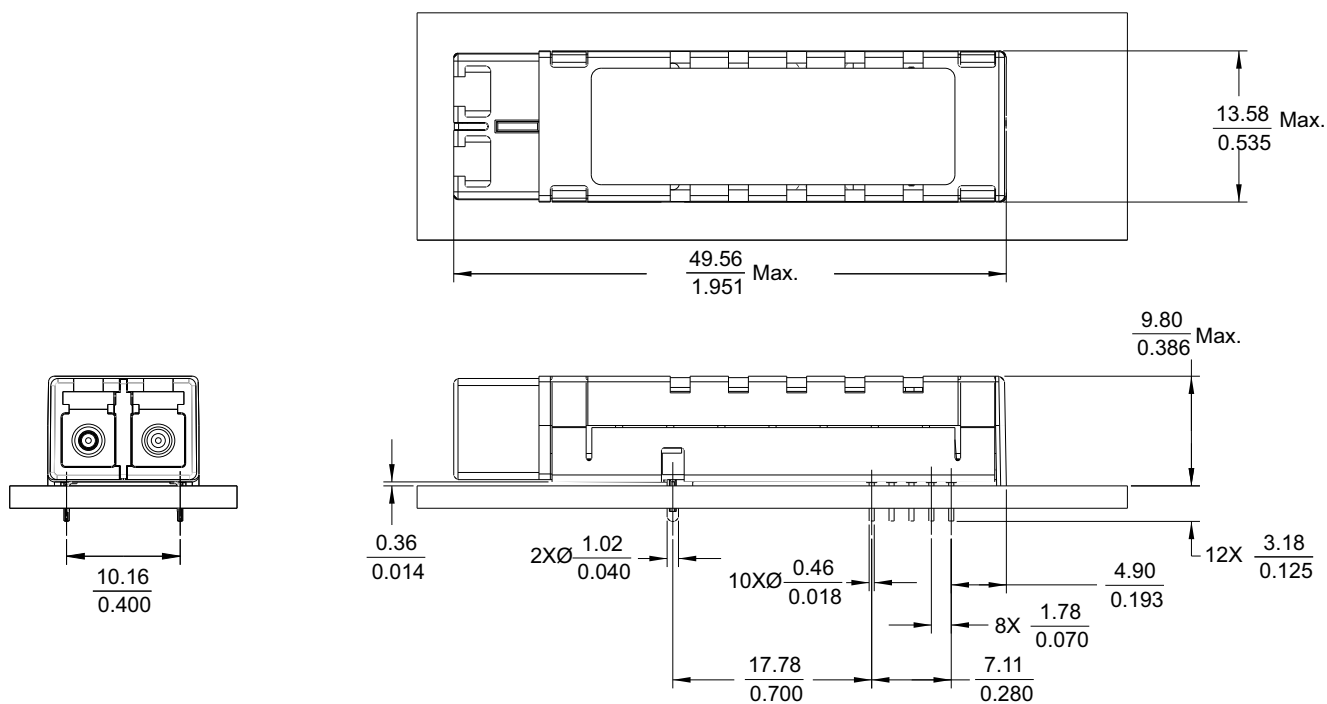

Sx3-Lx11x Small Form Factor Optical Transceiver

3.3 Volt, 1320nm LED, Multimode,
up to 1.0Km, OC-12 / STM-4

ORDERING INFORMATION

Application / Specification	Minimum Centerline Spacing	Temp. Range °C	Signal Detect	Part Number
OC-12 / STM-4 / ANSI T1.646	0.550" / 13.97mm	0 to +70	LVPECL	SA3-LP11
	0.550" / 13.97mm	-40 to +85	LVPECL	SA3-LP11H
	0.550" / 13.97mm	0 to +70	LVTTL	SA3-LT11
	0.550" / 15.24mm	-40 to +85	LVTTL	SA3-LT11H
	0.600" / 15.24mm	0 to +70	LVPECL	SR3-LP11
	0.600" / 15.24mm	-40 to +85	LVPECL	SR3-LP11H
	0.600" / 15.24mm	0 to +70	LVTTL	SR3-LT11
	0.600" / 15.24mm	-40 to +85	LVTTL	SR3-LT11H
	No Panel Grounding Clip	0 to +70	LVPECL	SN3-LP11
	No Panel Grounding Clip	-40 to +85	LVPECL	SN3-LP11H
	No Panel Grounding Clip	0 to +70	LVTTL	SN3-LT11
	No Panel Grounding Clip	-40 to +85	LVTTL	SN3-LT11H

IMPORTANT NOTICE

Stratos Lightwave, Inc. reserves the right to make changes to or discontinue any optical link product or service identified in this publication, without notice. Stratos Lightwave recommends that its customers to obtain the latest version of the publications to verify, before placing orders, that the information being relied on is current. Stratos Lightwave warrants performance of its optical link products to current specifications in accordance with the Stratos Lightwave standard warranty. Testing and other quality control techniques are utilized to the extent that Stratos Lightwave has determined it to be necessary to support this warranty. Specific testing of all parameters of each optical link product is not necessarily performed on all optical link products. Stratos Lightwave products are not designed for use in life support appliances, devices, or systems where malfunction of a Stratos Lightwave product can reasonably be expected to result in a personal injury. Stratos Lightwave customers using or selling optical link products for use in such applications do so at their own risk and agree to fully indemnify Stratos Lightwave for any damages resulting from such improper use or sale. Stratos Lightwave assumes no liability for Stratos Lightwave applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does Stratos Lightwave warrant or represent that a license, either expressed or implied is granted under any patent right, copyright, or intellectual property right, and makes no representations or warranties that these products are free from patent, copyright, or intellectual property rights. Applications that are described herein for any of the optical link products are for illustrative purposes only. Stratos Lightwave makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.



1450 Treeland Blvd., S.E., Palm Bay, FL 32909-2211 USA
Telephone: 321-308-4100 Fax: 321-308-0434
Web Page: www.stratoslightwave.com