

## Analog Voltage Input Modules, Narrow Bandwidth

### FEATURES

- ACCEPTS MILLIVOLT AND VOLTAGE LEVEL SIGNALS
- HIGH LEVEL VOLTAGE OUTPUTS
- 1500Vrms TRANSFORMER ISOLATION
- ANSI/IEEE C37.90.1-1989 TRANSIENT PROTECTION
- INPUT PROTECTED TO 240VAC CONTINUOUS
- 160dB CMR
- 95dB NMR AT 60Hz, 90dB at 50Hz
- $\pm 0.05\%$  ACCURACY
- $\pm 0.02\%$  LINEARITY
- $\pm 1\mu V/^\circ C$  DRIFT
- CSA CERTIFIED, FM APPROVED, CE COMPLIANT
- MIX AND MATCH SCM5B TYPES ON BACKPANELS

### DESCRIPTION

Each SCM5B30 and SCM5B31 voltage input module provides a single channel of analog input which is filtered, isolated, amplified, and converted to a high level analog voltage output (Figure 1). This voltage output is logic-switch controlled, allowing these modules to share a common analog bus without the requirement of external multiplexers.

The SCM5B modules are designed with a completely isolated computer side circuit which can be floated to  $\pm 50V$  from Power Common, pin 16. This complete isolation means that no connection is required between I/O Common and Power Common for proper operation of the output switch. If desired, the output switch can be turned on continuously by simply connecting pin 22, the Read-Enable pin to I/O Common, pin 19.

Signal filtering is accomplished with a six-pole filter which provides 95dB of normal-mode-rejection at 60Hz and 90dB at 50Hz. Two poles of this filter are on the field side of the isolation barrier, and the other four are on the computer side.

After the initial field-side filtering, the input signal is chopped by a proprietary chopper circuit. Isolation is provided by transformer coupling, again using a proprietary technique to suppress transmission of common mode spikes or surges. The module is powered from +5VDC,  $\pm 5\%$ .

A special input circuit on the SCM5B30 and SCM5B31 modules provides protection against accidental connection of power-line voltages up to 240VAC.

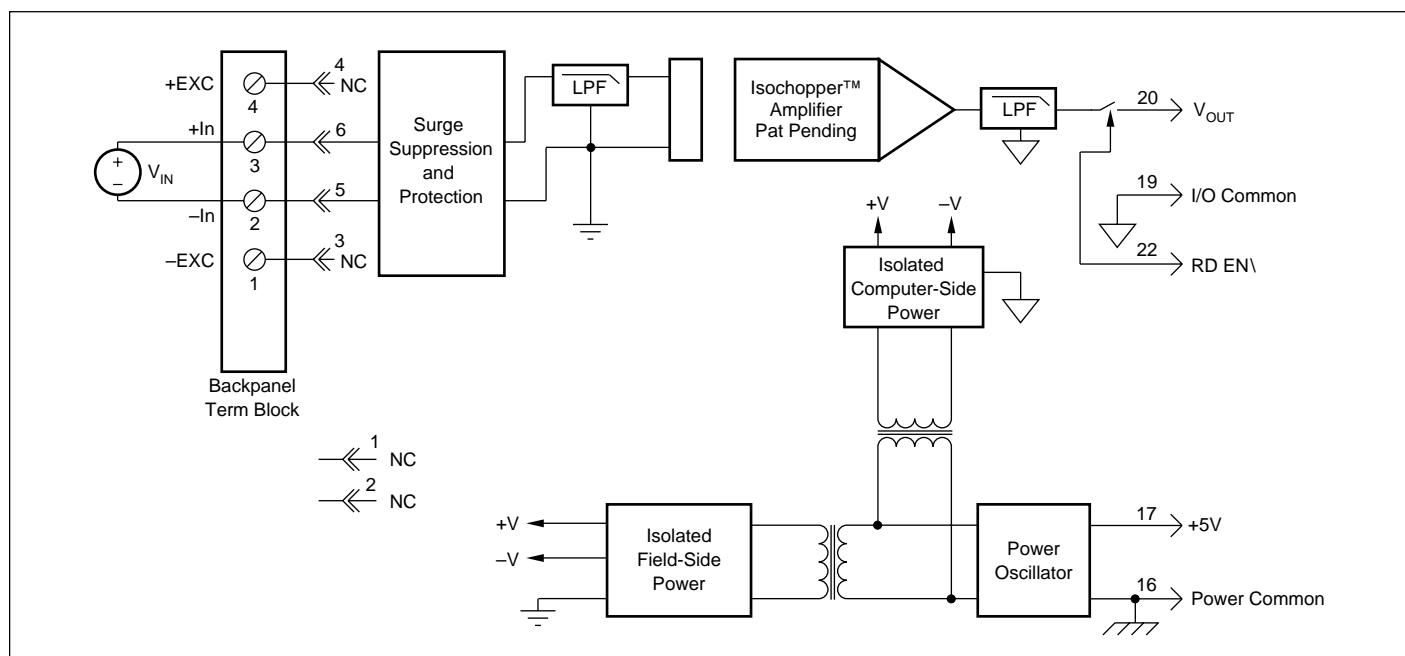


FIGURE 1. SCM5B30/31 Block Diagram.

# SPECIFICATIONS

Typical at  $T_A = +25^\circ\text{C}$  and +5V power.

Module	SCM5B30	SCM5B31
Input Range	$\pm 10\text{mV}$ to $\pm 100\text{mV}$	$\pm 1\text{V}$ to $\pm 40\text{V}$
Input Bias Current	$\pm 0.5\text{nA}$	$\pm 0.05\text{nA}$
Input Resistance		
Normal	$50\text{M}\Omega$	$650\text{k}\Omega$ (minimum)
Power Off	$40\text{k}\Omega$	$650\text{k}\Omega$ (minimum)
Overload	$40\text{k}\Omega$	$650\text{k}\Omega$ (minimum)
Input Protection		
Continuous	$240\text{Vrms}$ max	*
Transient	ANSI/IEEE C37.90.1-1989	*
CMV, Input to Output		
Continuous	$1500\text{Vrms}$ max	*
Transient	ANSI/IEEE C37.90.1-1989	*
CMR (50Hz or 60Hz)	$160\text{dB}$	*
NMR	$95\text{dB}$ at 60Hz, $90\text{dB}$ at 50Hz	*
Accuracy <sup>(1)</sup>	$\pm 0.05\%$ Span $\pm 10\mu\text{V}$ RTI <sup>(2)</sup> $\pm 0.05\%(V_z^{(3)})$	$\pm 0.05\%$ Span $\pm 0.2\text{mV}$ RTI <sup>(2)</sup> $\pm 0.05\%(V_z^{(3)})$
Nonlinearity	$\pm 0.02\%$ Span	*
Stability		
Input Offset	$\pm 1\mu\text{V}/^\circ\text{C}$	$\pm 20\mu\text{V}/^\circ\text{C}$
Output Offset	$\pm 20\mu\text{V}/^\circ\text{C}$	*
Gain	$\pm 25\text{ppm}/^\circ\text{C}$	$\pm 50\text{ppm}/^\circ\text{C}$
Noise		
Input, 0.1 to 10Hz	$0.2\mu\text{Vrms}$	$2\mu\text{Vrms}$
Output, 100kHz	$200\mu\text{Vrms}$	*
Bandwidth, -3dB	$4\text{Hz}$	*
Response Time, 90% Span	$0.2\text{s}$	*
Output Range	$\pm 5\text{V}$ , $0\text{V}$ to $+5\text{V}$	*
Output Resistance	$50\Omega$	*
Output Protection	Continuous Short to Ground	*
Output Selection Time (to $\pm 1\text{mV}$ of $V_{\text{OUT}}$ )	$6\mu\text{s}$ at $C_{\text{load}} = 0$ to $2000\text{pF}$	*
Output Current Limit	$\pm 8\text{mA}$	*
Output Enable Control		
Max Logic "0"	$+0.8\text{V}$	*
Min Logic "1"	$+2.4\text{V}$	*
Max Logic "1"	$+36\text{V}$	*
Input Current, "0", "1"	$0.5\mu\text{A}$	*
Power Supply Voltage	$+5\text{VDC} \pm 5\%$	*
Power Supply Current	$30\text{mA}$	*
Power Supply Sensitivity	$\pm 2\mu\text{V}/\%$ RTI <sup>(2)</sup>	$\pm 200\mu\text{V}/\%$ RTI <sup>(2)</sup>
Mechanical Dimensions	$2.28" \times 2.26" \times 0.60"$ (58mm x 57mm x 15mm)	*
Environmental		
Operating Temp. Range	$-40^\circ\text{C}$ to $+85^\circ\text{C}$	*
Storage Temp. Range	$-40^\circ\text{C}$ to $+85^\circ\text{C}$	*
Relative Humidity	0 to 95% Noncondensing	*
Emissions	EN50081-1, ISM Group 1, Class A (Radiated, Conducted)	*
Immunity	EN50082-1, ISM Group 1, Class A (ESD, RF, EFT)	*

\* Same specification as SCM5B30.

NOTES: (1) Includes nonlinearity, hysteresis and repeatability.

(2) RTI = Referenced to input.

(3)  $V_z$  is the input voltage that results in 0V output.

## ORDERING INFORMATION

MODEL	INPUT RANGE	OUTPUT RANGE
SCM5B30-01	$-10\text{mV}$ to $+10\text{mV}$	$-5\text{V}$ to $+5\text{V}$
SCM5B30-02	$-50\text{mV}$ to $+50\text{mV}$	$-5\text{V}$ to $+5\text{V}$
SCM5B30-03	$-100\text{mV}$ to $+100\text{mV}$	$-5\text{V}$ to $+5\text{V}$
SCM5B30-04	$-10\text{mV}$ to $+10\text{mV}$	$0\text{V}$ to $+5\text{V}$
SCM5B30-05	$-50\text{mV}$ to $+50\text{mV}$	$0\text{V}$ to $+5\text{V}$
SCM5B30-06	$-100\text{mV}$ to $+100\text{mV}$	$0\text{V}$ to $+5\text{V}$
SCM5B31-01	$-1\text{V}$ to $+1\text{V}$	$-5\text{V}$ to $+5\text{V}$
SCM5B31-02	$-5\text{V}$ to $+5\text{V}$	$-5\text{V}$ to $+5\text{V}$
SCM5B31-03	$-10\text{V}$ to $+10\text{V}$	$-5\text{V}$ to $+5\text{V}$
SCM5B31-04	$-1\text{V}$ to $+1\text{V}$	$0\text{V}$ to $+5\text{V}$
SCM5B31-05	$-5\text{V}$ to $+5\text{V}$	$0\text{V}$ to $+5\text{V}$
SCM5B31-06	$-10\text{V}$ to $+10\text{V}$	$0\text{V}$ to $+5\text{V}$
SCM5B31-07	$-20\text{V}$ to $+20\text{V}$	$-5\text{V}$ to $+5\text{V}$
SCM5B31-08	$-20\text{V}$ to $+20\text{V}$	$0\text{V}$ to $+5\text{V}$
SCM5B31-09	$-40\text{V}$ to $+40\text{V}$	$-5\text{V}$ to $+5\text{V}$
SCM5B31-10	$-40\text{V}$ to $+40\text{V}$	$0\text{V}$ to $+5\text{V}$

Call 800-444-7644  
For Information and Assistance

**DATAFORTH®**  
A Burr-Brown Company