


Silicon Carbide Schottky Diode

FEATURES:

- Worlds first 600V Schottky diode
- Revolutionary semiconductor material - Silicon Carbide
- Switching behavior benchmark
- No reverse recovery
- No temperature influence on the switching behavior
- Ideal diode for Power Factor Correction
- No forward recovery

Applications:

- SMPS, PFC, snubber



Chip Type	V _{BR}	I _F	Die Size	Package	Ordering Code
SIDC00D60SIC2	600V	2A	0.84 x 0.59 mm ²	sawn on foil	Q67050-A4201-A101
SIDC00D60SIC2	600V	2A	0.84 x 0.59 mm ²	unsawn	Q67050-A4201-A102

MECHANICAL PARAMETER:

Raster size	0.84 x 0.59	mm
Anode pad size	0.632 x 0.382	
Area total / active	0.496 / 0.255	mm ²
Thickness	401	μm
Wafer size	50	mm
Flat position	0	deg
Max. possible chips per wafer	3473 pcs	
Passivation frontside	Photoimide	
Anode metalization	3200 nm Al	
Cathode metalization	1400 nm Ni Ag –system suitable for epoxy and soft solder die bonding	
Die bond	electrically conductive glue or solder	
Wire bond	Al, ≤ 125μm	
Reject Ink Dot Size	Ø ≥ 0.2 mm	
Recommended Storage Environment	store in original container, in dry nitrogen, < 6 month at an ambient temperature of 23°C	

Maximum Ratings

Parameter	Symbol	Condition	Value	Unit
Repetitive peak reverse voltage	V_{RRM}		600	V
Surge peak reverse voltage	V_{RSM}		600	
Continuous forward current limited by T_{jmax}	I_F		2	A
Single pulse forward current (depending on wire bond configuration)	I_{FSM}	$T_C = 25^\circ C, t_P = 10 \text{ ms sinusoidal}$	4.1	
Maximum repetitive forward current limited by T_{jmax}	I_{FRM}	$T_C = 100^\circ C, T_j = 150^\circ C, D = 0.1$	7.3	
Non repetitive peak forward current	I_{FMAX}	$T_C = 25^\circ C, tp = 10 \mu s$	17	
Operating junction and storage temperature	T_j, T_{stg}		-55...+175	$^\circ C$

Static Electrical Characteristics (tested on chip), $T_j = 25^\circ C$, unless otherwise specified


Parameter	Symbol	Conditions	Value			Unit
			min.	Typ.	max.	
Reverse leakage current	I_R	$V_R = 600 V^*$ $T_j = 25^\circ C$		7	100	μA
Forward voltage drop	V_F	$I_F = 2 A$ $T_j = 25^\circ C$		1.6	2	V

* blocking characteristic measured under protective gas atmosphere. Chip should not be used without being embedded in pottant with breakdown field strength lower than 9 KV/mm at full blocking voltage.

Dynamic Electrical Characteristics, at $T_j = 25^\circ C$, unless otherwise specified, tested at component

Parameter	Symbol	Conditions	Value			Unit
			min.	Typ.	max.	
Total capacitive charge	Q_C	$I_F = 2 A$ $di/dt = 200 A/ms$ $V_R = 400 V$ $T_j = 150^\circ C$		4.6		nC
Switching time	t_{rr}	$I_F = 2 A$ $di/dt = 200 A/ms$ $V_R = 400 V$ $T_j = 150^\circ C$		n.a.		ns
Total capacitance	C	$I_F = 2 A$ $di/dt = 200 A/ms$ $T_j = 25^\circ C$ $f = 1 MHz$	$V_R = 1 V$	50		pF
			$V_R = 300 V$	5.2		
			$V_R = 600 V$	5		

CHIP DRAWING:

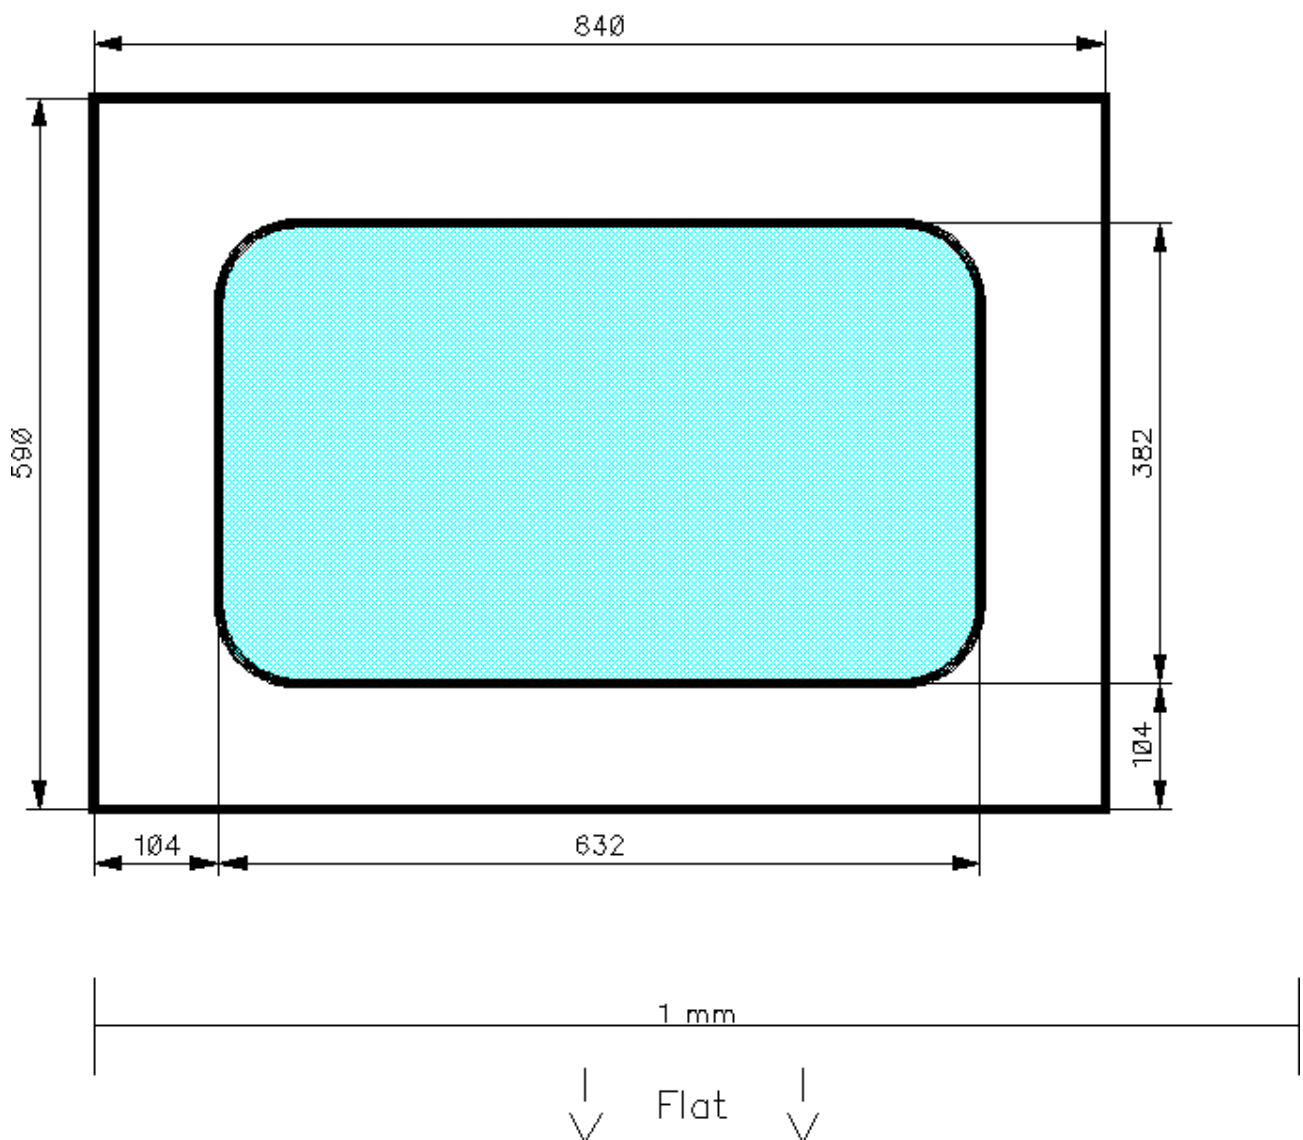

FURTHER ELECTRICAL CHARACTERISTICS:

This chip data sheet refers to the
device data sheet

INFINEON TECHNOLOGIES

SDP02S60

Description:

AQL 0,65 for visual inspection according to failure catalog

Electrostatic Discharge Sensitive Device according to MIL-STD 883

Test-Normen Villach/Prüffeld

Published by
Infineon Technologies AG
Bereich Kommunikation
St.-Martin-Strasse 53
D-81541 München
© Infineon Technologies AG 2000
All Rights Reserved.

Attention please!

The information herein is given to describe certain components and shall not be considered as warranted characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Infineon Technologies is an approved CECC manufacturer.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office in Germany or our Infineon Technologies Representatives world-wide (see address list).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and / or maintain and sustain and / or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.