



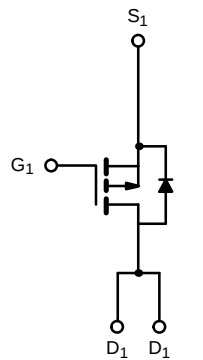


Dual P-Channel 2.5-V (G-S) MOSFET

PRODUCT SUMMARY		
V_{DS} (V)	$r_{DS(on)}$ (Ω)	I_D (A)
-20	0.033 @ $V_{GS} = -4.5$ V	-6.2
	0.050 @ $V_{GS} = -2.5$ V	-5

TrenchFET®
Power MOSFETs
2.5-V Rated



P-Channel MOSFET

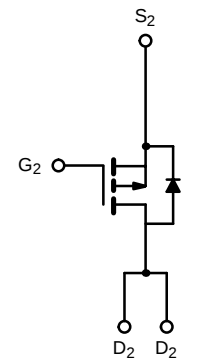

P-Channel MOSFET

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)				
Parameter		Symbol	Limit	Unit
Drain-Source Voltage		V_{DS}	-20	V
Gate-Source Voltage		V_{GS}	± 12	
Continuous Drain Current ($T_J = 150^\circ\text{C}$) ^a	$T_A = 25^\circ\text{C}$	I_D	-6.2	A
	$T_A = 70^\circ\text{C}$		-4.9	
Pulsed Drain Current		I_{DM}	-40	
Continuous Source Current (Diode Conduction) ^a		I_S	-1.7	
Maximum Power Dissipation ^a	$T_A = 25^\circ\text{C}$	P_D	2.0	W
	$T_A = 70^\circ\text{C}$		1.3	
Operating Junction and Storage Temperature Range		T_J, T_{stg}	-55 to 150	$^\circ\text{C}$

THERMAL RESISTANCE RATINGS			
Parameter	Symbol	Limit	Unit
Maximum Junction-to-Ambient ^a	R_{thJA}	62.5	$^\circ\text{C/W}$

Notes

a. Surface Mounted on FR4 Board, $t \leq 10$ sec.

For SPICE model information via the Worldwide Web: <http://www.vishay.com/www/product/spice.htm>

SPECIFICATIONS ($T_J = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)







Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}$, $I_D = -250\ \mu\text{A}$	-0.6		1.4	V
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0\ \text{V}$, $V_{GS} = \pm 12\ \text{V}$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = -20\ \text{V}$, $V_{GS} = 0\ \text{V}$			-1	μA
		$V_{DS} = -20\ \text{V}$, $V_{GS} = 0\ \text{V}$, $T_J = 55^\circ\text{C}$			-5	
On-State Drain Current ^a	$I_{D(on)}$	$V_{DS} \leq -5\ \text{V}$, $V_{GS} = -4.5\ \text{V}$	-20			A
Drain-Source On-State Resistance ^a	$r_{DS(on)}$	$V_{GS} = -4.5\ \text{V}$, $I_D = -6.2\ \text{A}$		0.027	0.033	Ω
		$V_{GS} = -2.5\ \text{V}$, $I_D = -5\ \text{A}$		0.04	0.050	
Forward Transconductance ^a	g_{fs}	$V_{DS} = -10\ \text{V}$, $I_D = -6.2\ \text{A}$		20		S
Diode Forward Voltage ^a	V_{SD}	$I_S = -1.7\ \text{A}$, $V_{GS} = 0\ \text{V}$			-1.2	V
Dynamic^b						
Total Gate Charge	Q_g	$V_{DS} = -10\ \text{V}$, $V_{GS} = -4.5\ \text{V}$, $I_D = -6.2\ \text{A}$		22	35	nC
Gate-Source Charge	Q_{gs}			7		
Gate-Drain Charge	Q_{gd}			3.5		
Turn-On Delay Time	$t_{d(on)}$	$V_{DD} = -10\ \text{V}$, $R_L = 10\ \Omega$ $I_D \approx -1\ \text{A}$, $V_{GEN} = -10\ \text{V}$, $R_G = 6\ \Omega$		27	50	ns
Rise Time	t_r			32	50	
Turn-Off Delay Time	$t_{d(off)}$			95	150	
Fall Time	t_f			45	70	
Source-Drain Reverse Recovery Time	t_{rr}	$I_F = -1.7\ \text{A}$, $di/dt = 100\ \text{A}/\mu\text{s}$		40	80	

Notes

- a. Pulse test; pulse width $\leq 300\ \mu\text{s}$, duty cycle $\leq 2\%$.
b. For design aid only; not subject to production testing.



TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

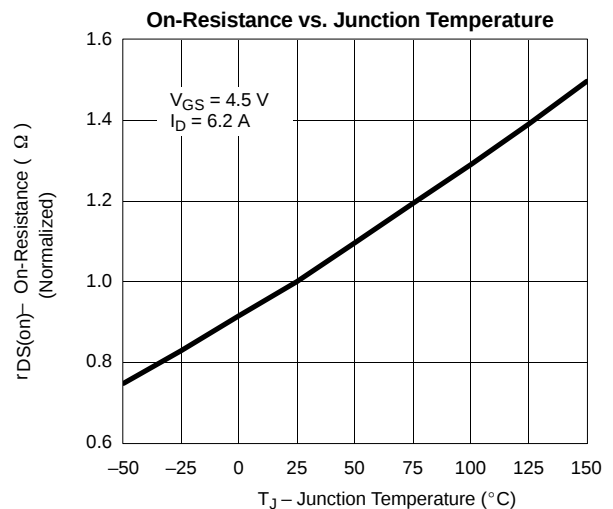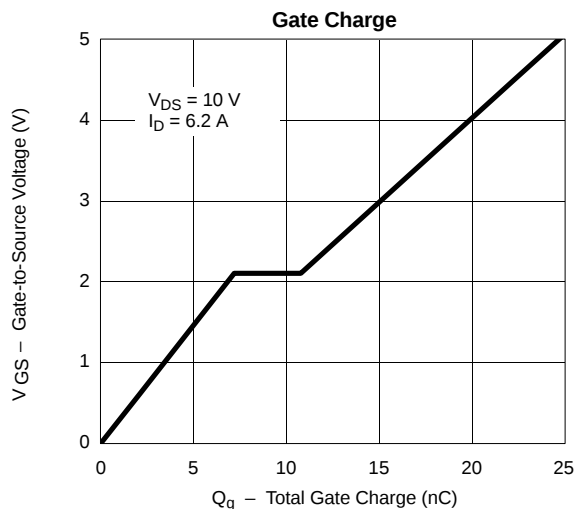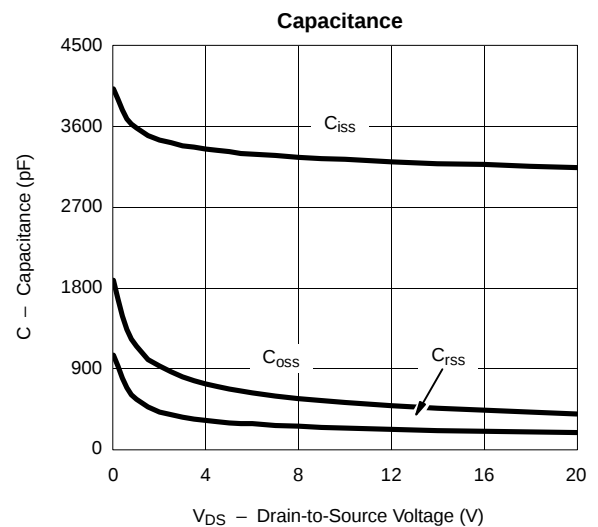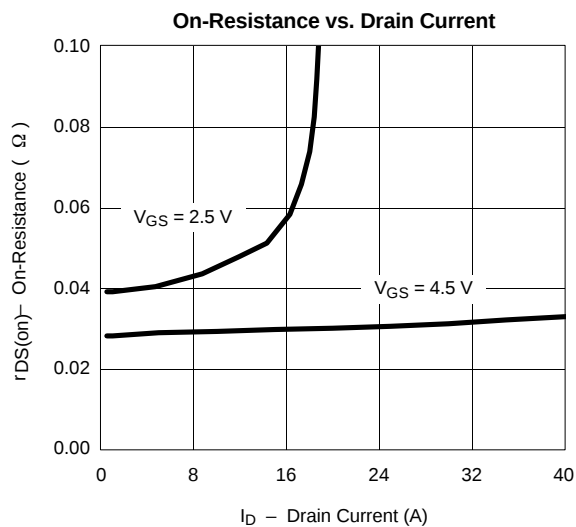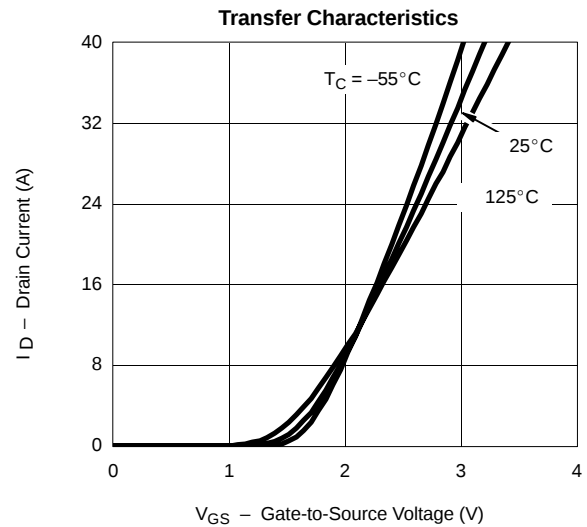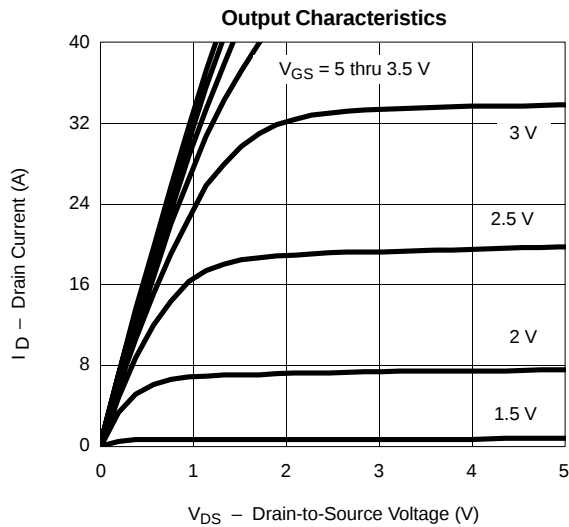

TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)
