

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS

REVERSE VOLTAGE: 20 - 100 V
FORWARD CURRENT: 2.0 A


FEATURES

- ◇ Schottky barrier rectifier
- ◇ Guardring protection
- ◇ Low forward voltage
- ◇ Reverse energy tested
- ◇ High current capability
- ◇ Extremely low thermal resistance

MECHANICAL DATA

- ◇ Case: SMB molded plastic body
- ◇ Polarity: Color band denotes cathode end
- ◇ Mounting position: ANY
- ◇ Weight: 0.003 ounces, 0.093 gram

(DO-214AA)SMB

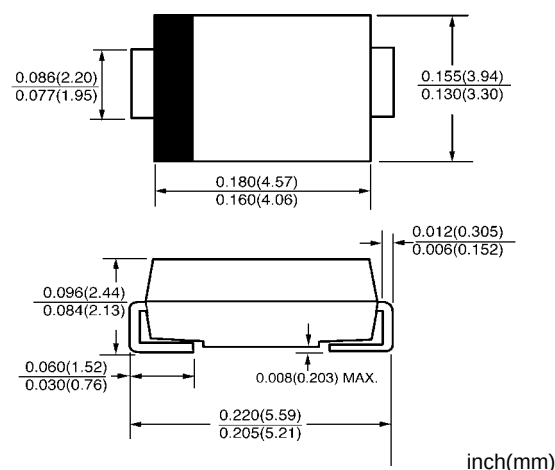

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified

		SK22	SK23	SK24	SK25	SK26	SK28	SK29	S210	UNITS
Device marking code		SK22	SK23	SK24	SK25	SK26	SK28	SK29	S210	
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	80	90	100	V
Maximum RMS voltage	V _{RWS}	14	21	28	35	45	63	63	70	V
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	80	90	100	V
Maximum average forward rectified current at T _L =90℃	I _{F(AV)}	2.0								A
Peak forward surge current 8.3ms single half-sine-wave	I _{FSM}	50.0								A
Maximum instantaneous forward voltage at I _{FM} =2.0A (NOTE1)	V _F	0.50			0.70		0.85			v
Maximum DC reverse current T _J =25℃ at rated DC blocking voltage T _J =100℃	I _R	0.5 20.0								m A
Maximum thermal resistance	R _{θ JL}	17.0								℃/W
Operating temperature range	T _J	- 55 ---- +125								℃
Storage temperature range	T _{STG}	- 55 ---- +150								℃

NOTE: 1.Pulse test: Pulse width 300us,duty cycle 1 %

www.galaxycn.com

FIG.1 – FORWARD DERATING CURVE

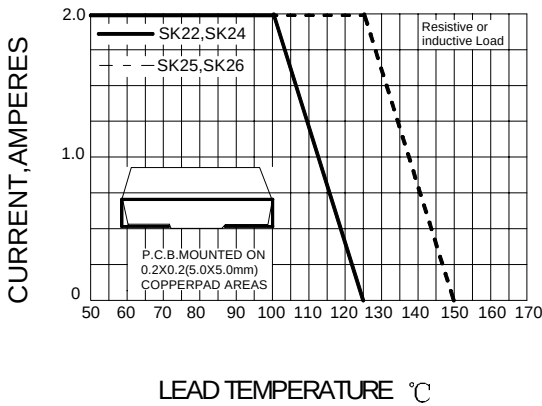


FIG.2– PEAK FORWARD SURGE CURRENT

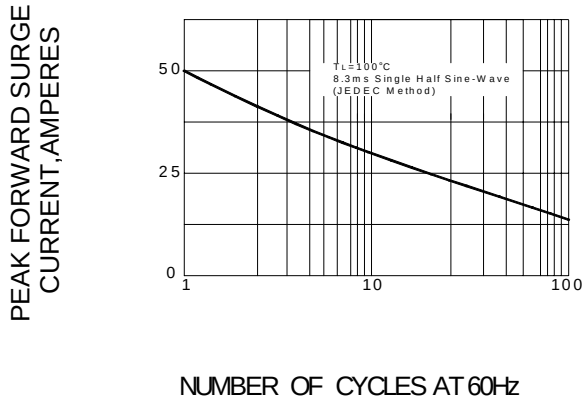


FIG.3 – TYPICAL FORWARD CHARACTERISTICS

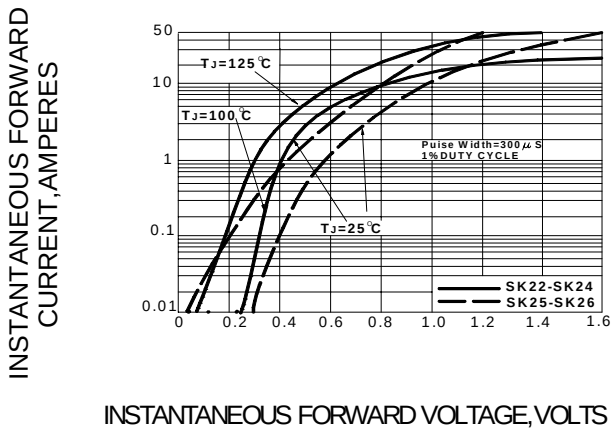


FIG.4 – TYPICAL REVERSE CHARACTERISTICS

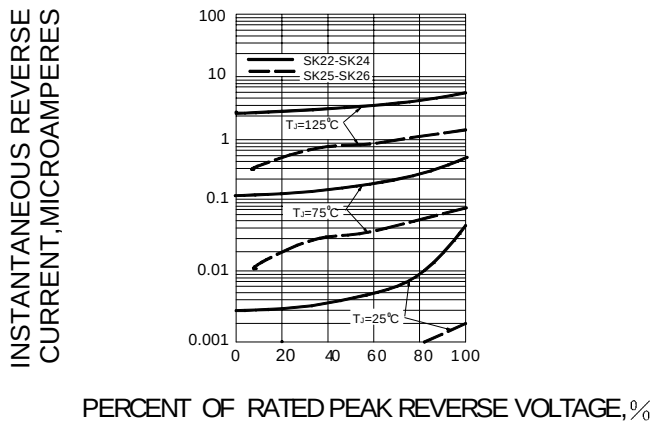


FIG.5–TYPICAL JUNCTION CAPACITANCE

