

**New
True SMD Package**


SaRonix

Crystal Clock Oscillator

3.3 & 5V, High Frequency, ECL

Technical Data

SEL24xx / SEL25xx Series

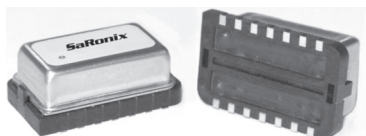

Description

A crystal controlled, high frequency, highly stable oscillator, compatible with Motorola 10KH, 10KE or 100LVE logic families. The output can be disabled and wired-OR for testing or combining multiple clocks. Open emitter output allows the user to select the load termination to optimize performance. Complementary outputs are available.

Applications & Features

- SONET/ATM/SDH - 155.5200 MHz
- Forward Error Correction (FEC) - 166.6285 MHz
- Gigabit Ethernet - 125.0000 MHz
- Fibre Channel - 106.2500 MHz
- Ideal for high resolution graphics & imaging applications
- Provides 10KH and 10KE (Motorola ECLinPS) compatible outputs
- 3.3V PECL versions are LVDS compatible
- Disable/wired-OR output feature and complementary output are available
- Superior stability with AT-cut crystal performance compared to SAW technology
- Fundamental or overtone crystal operation results in superior jitter characteristics over PLL implementations
- True SMD DIL 14 version available

Frequency Range:	7 MHz to 200 MHz
Frequency Stability:	±20, ±25, ±50 or ±100 ppm over all conditions: calibration tolerance, operating temperature, input voltage change, load change, aging, shock and vibration.
Temperature Range:	
Operating:	0 to +70°C or -40 to +85°C
Storage:	-55 to +125°C
Supply Voltage:	5.0V or -5.2V, 3.3V PECL
Supply Current:	48mA typ / Complementary 45mA typ / E/D (40mA/Disabled) 43mA typ / Single Output 80mA max
Output Drive:	
Symmetry:	45/55% max @ V _{BB} or Complementary Outputs Crossing
Rise & Fall Times:	1ns typ, 3ns max 20% to 80% for 10KH Logic 350ps typ, 550ps max 20% to 80% for 10KE Logic
Logic 0:	V _{CC} -1.595 max, 0 to +70°C V _{CC} -1.595 max, -40 to +85°C
Logic 1:	V _{CC} -1.02 min, 0 to +70°C V _{CC} -1.08 min, -40 to +85°C
Load:	50Ω to V _{CC} -2V
Jitter:	3.5ps max RMS period jitter, 1ps max 1σ cycle-to-cycle jitter
Mechanical:	
Shock:	MIL-STD-883, Method 2002, Condition B
Solderability:	MIL-STD-883, Method 2003
Terminal Strength:	MIL-STD-883, Method 2004, Conditions B2
Vibration:	MIL-STD-883, Method 2007, Condition A
Solvent Resistance:	MIL-STD-202, Method 215
Resistance to Soldering Heat:	MIL-STD-202, Method 210, Condition A, B or C (I or J for Gull Wing)
Environmental:	
Gross Leak Test:	MIL-STD-883, Method 1014, Condition C
Fine Leak Test:	MIL-STD-883, Method 1014, Condition A2
Thermal Shock:	MIL-STD-883, Method 1011, Condition A
Moisture Resistance:	MIL-STD-883, Method 1004

Part Numbering Guide

SEL 2410 B - 106.2500 Series ECL/PECL Frequency (MHz) Blank = Thru-hole K = Gull Wing Package S = True SMD Adaptor (see product photo) Stability Tolerance AA = ±20 ppm, 0 to +70°C A = ±25 ppm, 0 to +70°C B = ±50 ppm, 0 to +70°C C = ±100 ppm, 0 to +70°C E = ±50 ppm, -40 to +85°C F = ±100 ppm, -40 to +85°C		
Type= Voltage/Logic	Pin 1 Function	Frequency (MHz)
2410= +5.0V / 10KH	Enable	7 to 133.3333
2411= +5.0V / 10KH	Q̄ Comp	7 to 200.0000
2412= +5.0V / 10KH	No Connect	7 to 133.3333
2430= +3.3V / 10KE	Enable	84 to 200.0000
2431= +3.3V / 10KE	Q̄ Comp*	25 to 200.0000
2432= +3.3V / 10KE	No Connect	25 to 200.0000
2511= -5.2V / 10KH	Q̄ Comp*	7 to 200.0000
2512= -5.2V / 10KH	No Connect	7 to 133.3333

*Q̄ Complementary - both outputs require termination

DS-217 REV B

New True SMD Package*

SaRonix


Crystal Clock Oscillator

3.3 & 5V, High Frequency, ECL

Technical Data


SEL24xx / SEL25xx Series

Package Details


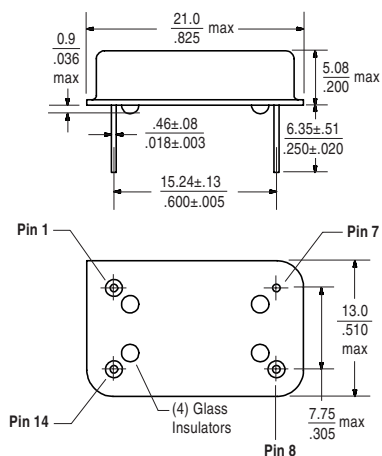


Marking Format**

Includes Date Code, Frequency, Model



Gull Wing Package





Scale: None (Dimensions in mm inches)

**Exact location of items may vary

* Package with true SMD adapter is not shown, please see separate data sheet.

Output Waveforms

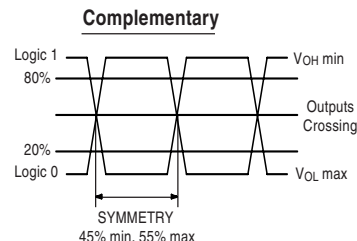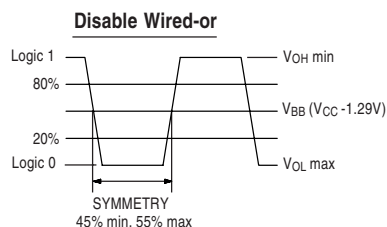

Enable Function and Supply Options

Truth Table I - Positive Supply

Pin 1 $\bar{EN}$	Pin 8
Logic 0	Clock Output
Logic 1	Logic 0

Table II

Device	Pin 7 (Case)	Pin 14
SEL24xx	VEE 0V	VCC +5V (+3.3V 10KE)
SEL251x	VCC 0V	VEE -5V (-3.3V)


Enable/Disable Propagation Delay:

10K: $((1/f)/2) + 250ps\ max$


10KH: $((1/f)/2) + 2ns\ max$

Test Circuits

SEL24x0

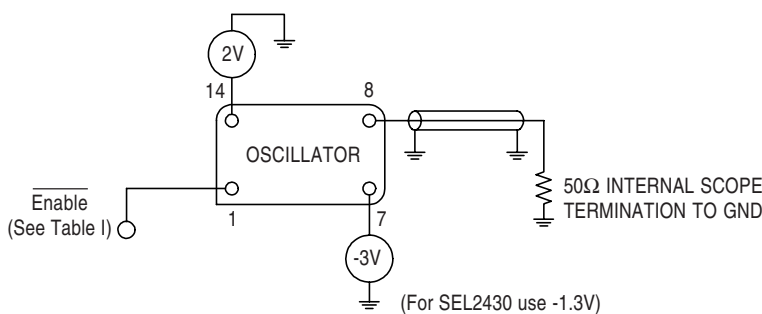

SEL24x1

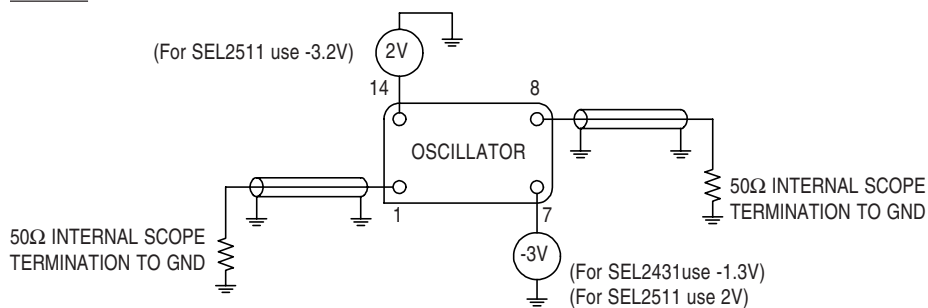

All specifications are subject to change without notice.

DS-217 REV B