


TRANSFORMER FOR ANNEX B ROUTER

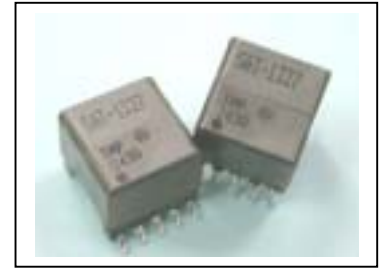


MODEL NO. : SAT-1327B

ELECTRICAL SPECIFICATION : (AP0840 COMPATIBLE)

- * IMPEDANCE RATIO : PRI – SEC : 100Ω:100Ω
- * INDUCTANCE : 5 – 1 w/2-4 SHORTED : 102.4 uH ±5% @ 10 KHZ,100mVRMS.
- * DC RESISTANCE : 10 – 7 : 0.24Ω MAX
: 9 – 6 : 0.24Ω MAX
: 5 – 2 : 0.20Ω MAX
: 4 – 1 : 0.20Ω MAX
- * LEAKAGE INDUCTANCE : 5 – 1 : 6uH MAX. @ 10 KHZ,100mVRMS.
w/ 4 – 2 , 9 - 7 & 6 – 10 SHORTED
- * TURN RATIO : 5 – 2 : 4 – 1 = 1:1 ±1%
: 5 – 1 : 6 – 10 = 1:1 ±1%
- * HI-POT : 1875 VRMS FOR 2 SECOND BETWEEN PRIMARY AND SECONDARY.
1500 VRMS FOR 2 SECOND BETWEEN WINDING AND CORE.

PHYSICAL DIMENSION : (UNIT : mm)

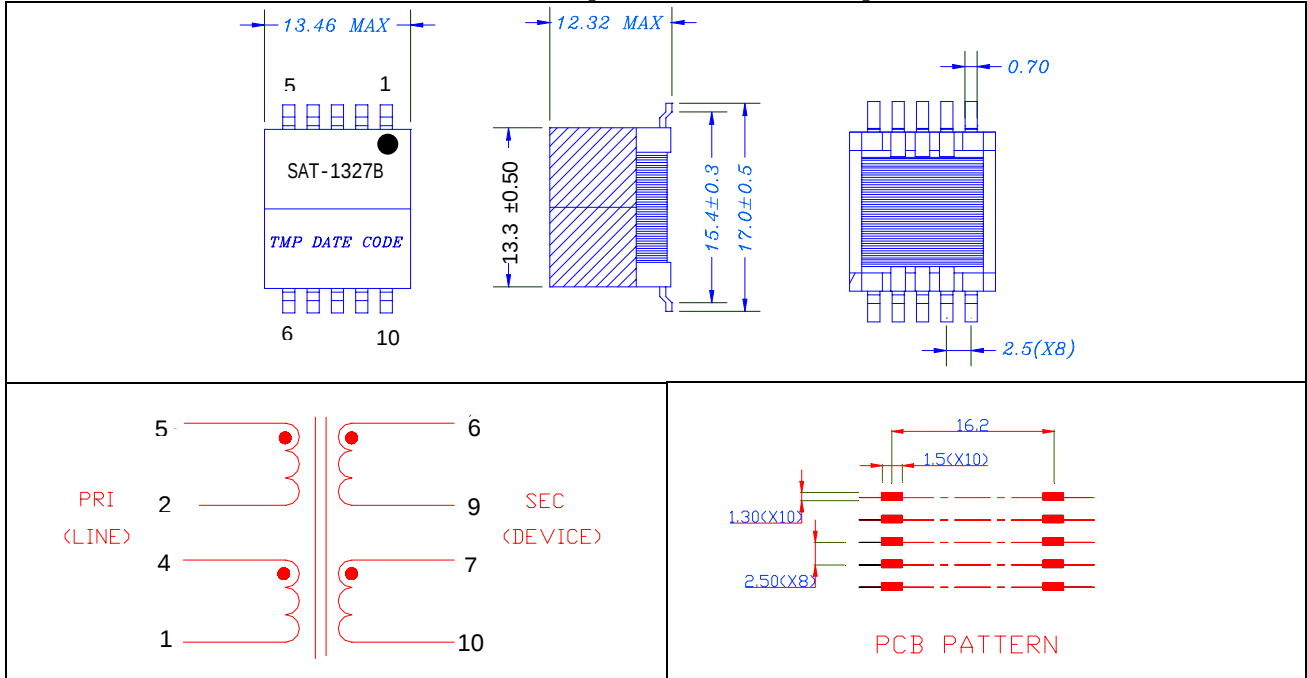

台北沛波電子股份有限公司
TAIPEI MULTIPower ELECTRONICS CO.,LTD
2 ND, FL.,542-7, CHUNG-CHENG ROAD,
HSIN-TIEN CITY,TAIPEI,TAIWAN, R.O.C
TEL : (02)8667-2078 FAX: (02) 8667-2080

C 版