

TRANSFORMER FOR ADSL MODEM

SAFETY
E202778




MODEL NO. : SAT-1316

ELECTRICAL SPECIFICATION : (C1308 COMPATIBLE,UL1950 APPROVAL)

- * IMPEDANCE RATIO : PRI – SEC : 100 Ω : 100 Ω
- * INDUCTANCE : 1 – 4 w/3-2 SHORTED : 440 μ H $\pm$ 5% @ 10KHZ,0.1VRMS. .
- * DC RESISTANCE : 1 – 3 : 0.59 Ω MAX.
: 2 – 4 : 0.59 Ω MAX.
: 9 – 7 : 0.48 Ω MAX.
: 10 – 8 : 0.48 Ω MAX.
- * LEAKAGE INDUCTANCE : 1 – 4 : 13.0 μ H MAX. @ 300 KHZ,100mVRMS.
w/ 3 – 2 ,10 – 7 & 8 – 9 SHORTED
- * TURN RATIO : 10 – 8 : 9 – 7 : 1:1 $\pm$ 1%.
: 10 – 8 : 1 – 3 : 1:1 $\pm$ 1%.
- * HI –POT : 1875 VRMS FOR 2 SECONDS BETWEEN PRIMARY AND SECONDARY.

PHYSICAL DIMENSION : (UNIT : mm)

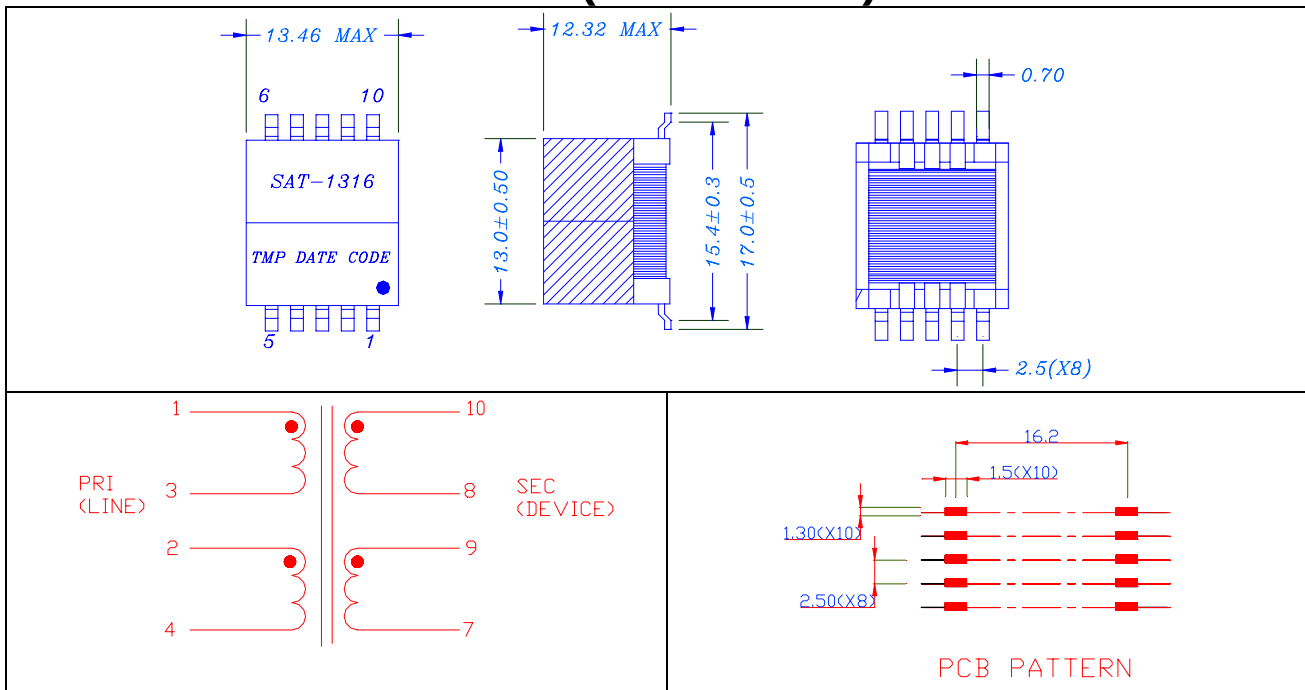

台北沛波電子股份有限公司
TAIPEI MULTIPower ELECTRONICS CO.,LTD
2 ND, FL.,542-7, CHUNG-CHENG ROAD,
HSIN-TIEN CITY,TAIPEI,TAIWAN, R.O.C
TEL : (02)8667-2078 FAX: (02) 8667-2080