

TRANSFORMER FOR ANNEX B ROUTER

SAFETY
E202778



MODEL NO. : SAT-1327A

ELECTRICAL SPECIFICATION : (AP0840 COMPATIBLE)

* IMPEDANCE RATIO : PRI – SEC : 100Ω:100Ω

* INDUCTANCE : 4 – 1 w/2-3 SHORTED : 102.4 uH ±5% @ 10 KHZ,100mVRMS.

* DC RESISTANCE :10 – 8 : 0.95Ω MAX

: 9 – 7 : 1.2Ω MAX

: 3 – 1 : 1.0Ω MAX

: 4 – 2 : 1.0Ω MAX

* LEAKAGE INDUCTANCE : 4 – 1 : 6uH MAX. @ 10 KHZ,100mVRMS.

w/ 3 – 2 , 9 – 8 & 7 – 10 SHORTED

* TURN RATIO : 4 – 2 : 3 – 1 = 1:1 ±1%


: 4 – 1 : 7 – 10 = 1:1 ±1%

* HI-POT : PRI – SEC :1875 VRMS FOR 2 SECOND BETWEEN PRIMARY AND SECONDARY.

:1500 VRMS FOR 2 SECOND BETWEEN WINDING AND CORE.



PHYSICAL DIMENSION : (UNIT : mm)

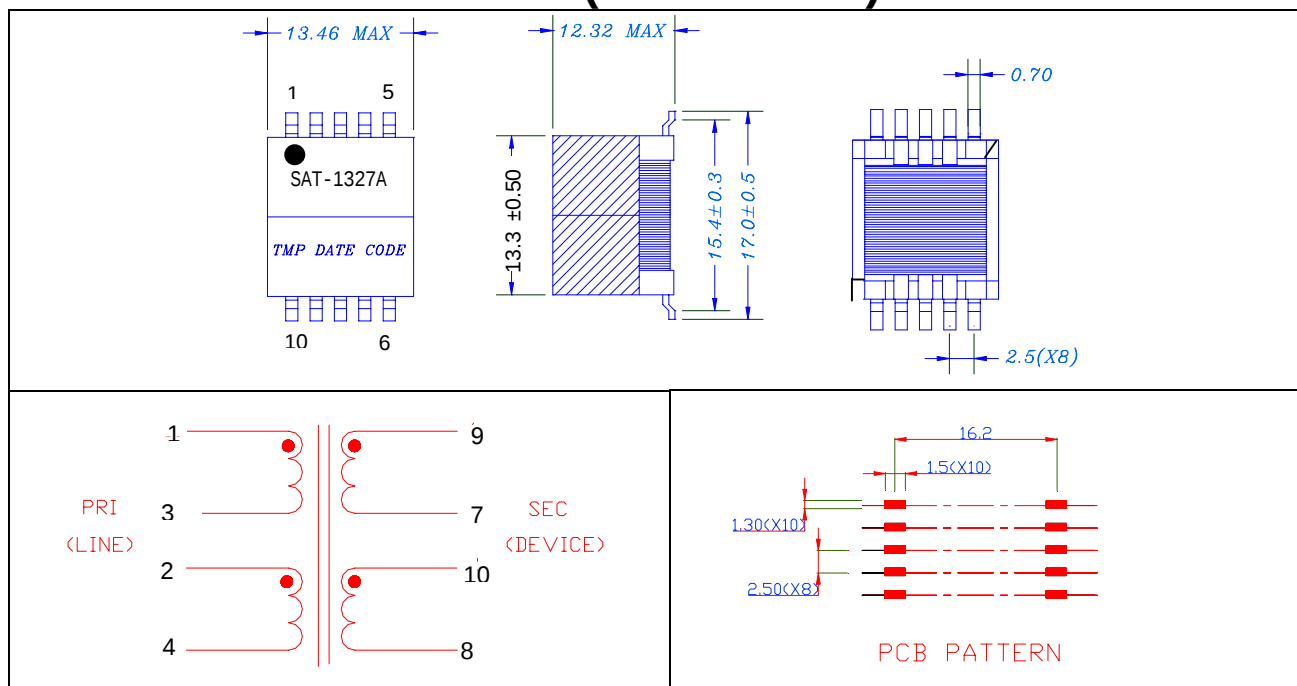

台北沛波電子股份有限公司

TAIPEI MULTIPower ELECTRONICS CO.,LTD

2 ND, FL.,542-7, CHUNG-CHENG ROAD,

HSIN-TIEN CITY,TAIPEI,TAIWAN, R.O.C

TEL : (02)8667-2078

FAX: (02) 8667-2080

A 版