


GENERAL USE RECTIFIER DIODE

Outline drawings

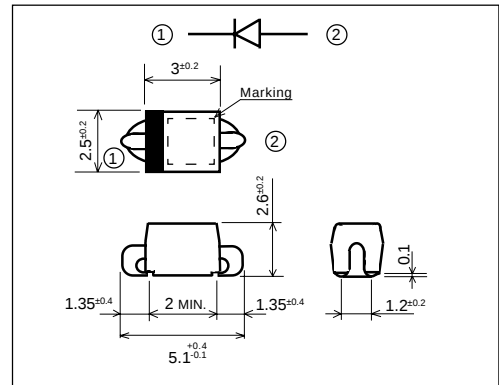


Features

- Surface-mount device
- High reliability

Applications

- General purpose rectifier applications
- Relay control use

Marking

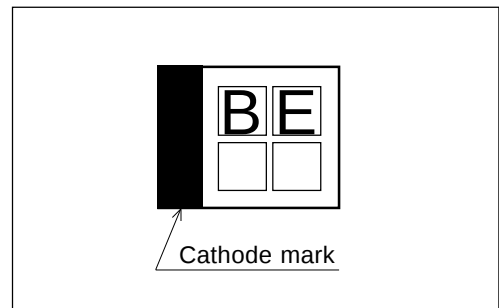

Maximum ratings and characteristics

- Absolute maximum ratings

Item	Symbol	Conditions	Rating	Unit
			SC016-8	
Repetitive peak reverse voltage	V_{RRM}		800	V
Non-repetitive peak reverse voltage	V_{RSM}		800	V
Average output current	I_o	Resistive load $T_a=40^{\circ}C$	1.0 *	A
Surge current	I_{FSM}	Sine wave 10ms	40	A
Operating junction temperature	T_j		-40 to +150	$^{\circ}C$
Storage temperature	T_{stg}		-40 to +150	$^{\circ}C$


*Mounted to glass fabric base epoxy resin printed circuits, land (15mm x 15mm)

- Electrical characteristics ($T_a=25^{\circ}C$ Unless otherwise specified)


Item	Symbol	Conditions	Max.	Unit
Forward voltage drop	V_{FM}	$I_{FM}=2.0A$	1.1	V
Reverse current	I_{RRM}	$V_R=V_{RRM}$	10	μA
Thermal resistance	$R_{th(j-a)}$	Junction to ambient	120*	$^{\circ}C/W$

■ Characteristics


Forward Characteristic (typ.)

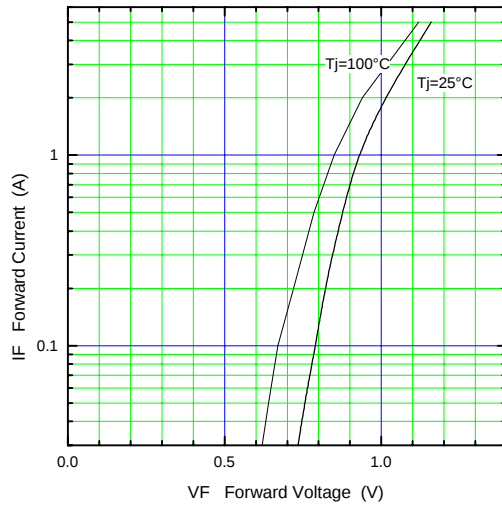


Reverse Characteristic (typ.)

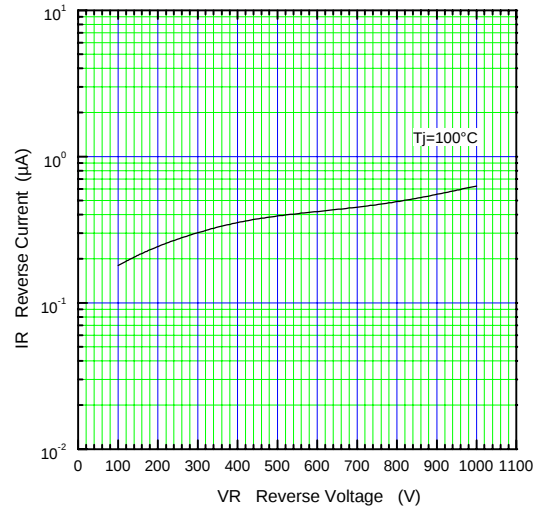

Current Derating (I_o - T_a)

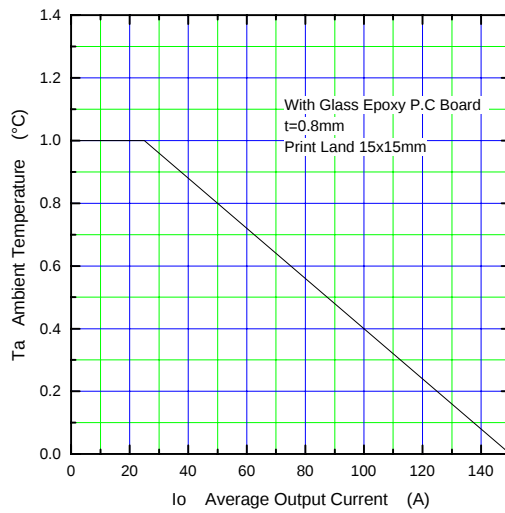

Surge Capability

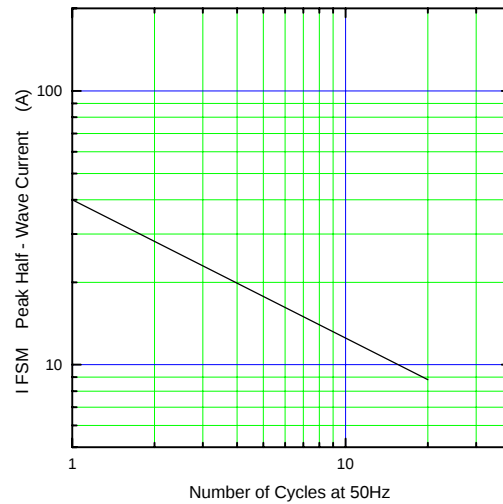

Transient Thermal Impedance

