

**Alternative Connectors**

.MMCX Straight Plug(male)

P/N: S181FL-6-MM-2450S-DR

**Electrical Properties:**

Frequency Range: 2.4~2.5 GHz

Impedance:  $50\Omega$  nominalVSWR:  $<2.0:1$ 

Gain: \*2.0 dBi

Radiation: Omni

Polarization: Vertical

\*Gain is measured under no flying lead.

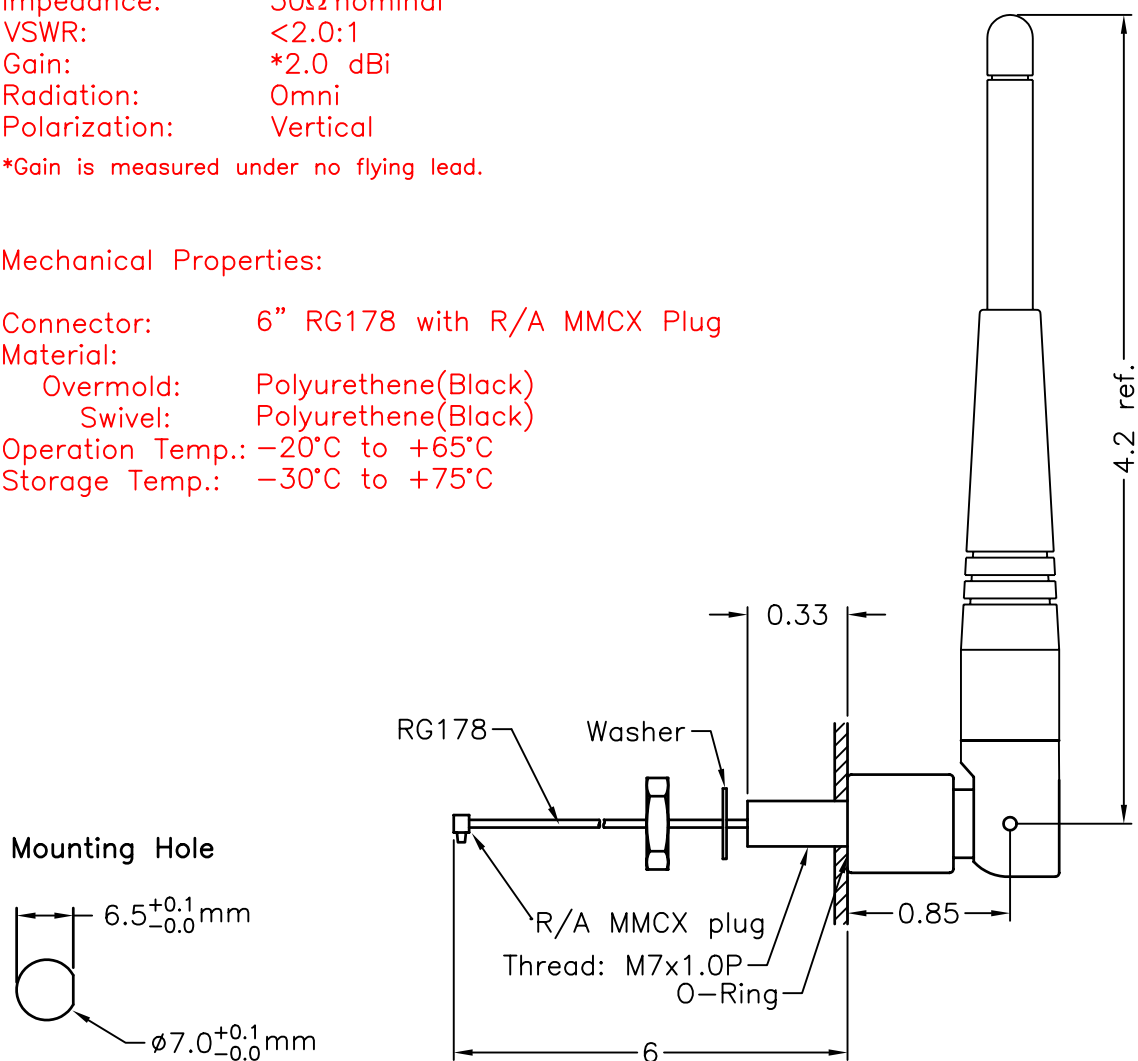
**Mechanical Properties:**

Connector: 6" RG178 with R/A MMCX Plug


Material:

Overmold: Polyurethane(Black)

Swivel: Polyurethane(Black)

Operation Temp.:  $-20^{\circ}\text{C}$  to  $+65^{\circ}\text{C}$ Storage Temp.:  $-30^{\circ}\text{C}$  to  $+75^{\circ}\text{C}$ 

\*This D hole is viewed from  
housing outside to inside

TITLE	2.4GHz Fixed Mount Swivel Antenna – 181 model		DATE	SHEET
				1 OF 1
UNIT	DWG. NO. S181FL-6-RMM-2450S-DR			A4
inch				
SCALE				
NONE				