

S10SC4M

40V 10A


FEATURES

- Tj150℃
- PRRSM avalanche guaranteed

APPLICATION

- Switching power supply
- DC/DC converter
- Home Appliances, Office Equipment
- Telecommunication

OUTLINE DIMENSIONS

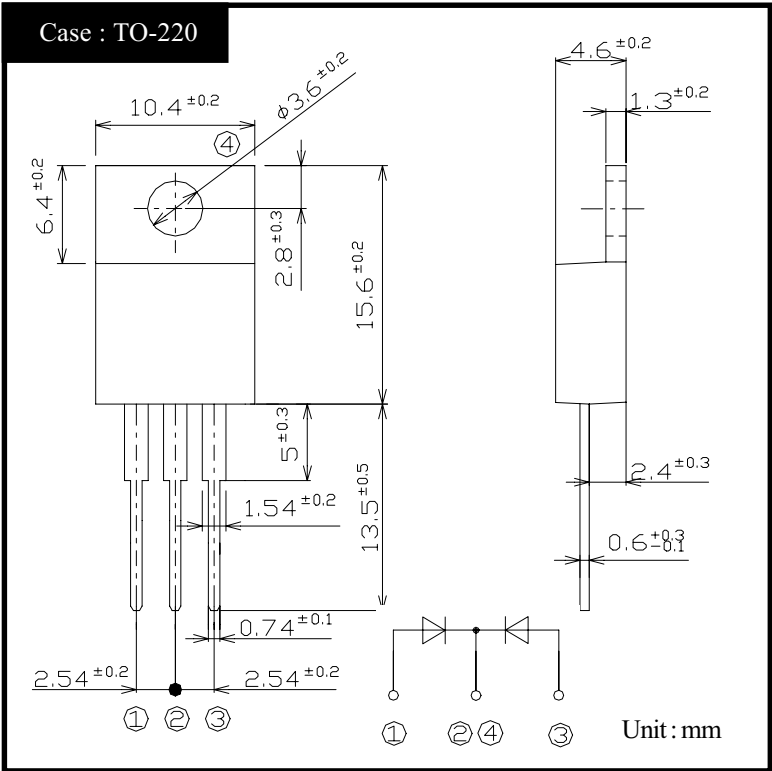

RATINGS

● Absolute Maximum Ratings (If not specified Tc=25℃)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-40~150	℃
Operating Junction Temperature	Tj		150	℃
Maximum Reverse Voltage	VRM		40	V
Repetitive Peak Surge Reverse Voltage	VRFSM	Pulse width 0.5ms, duty 1/40	45	V
Average Rectified Forward Current	IO	50Hz sine wave, R-load, Rating for each diode IO/2, Tc=125℃	10	A
Peak Surge Forward Current	IFSM	50Hz sine wave, Non-repetitive 1 cycle peak value, Tj=125℃	100	A
Repetitive Peak Surge Reverse Power	PRFSM	Pulse width 10 μ s, Rating of per diode, Tj=25℃	330	W
Mounting Torque	TOR	(Recommended torque:0.3N·m)	0.5	N·m

● Electrical Characteristics (If not specified Tc=25℃)


Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	VF	IF=5A, Pulse measurement, Rating of per diode	Max.0.55	V
Reverse Current	IR	VR=VRM, Pulse measurement, Rating of per diode	Max.3.5	mA
Junction Capacitance	Cj	f=1MHz, VR=10V, Rating of per diode	Typ.180	pF
Thermal Resistance	θ jc	junction to case	Max.3.0	℃/W

S10SC4M

Forward Voltage

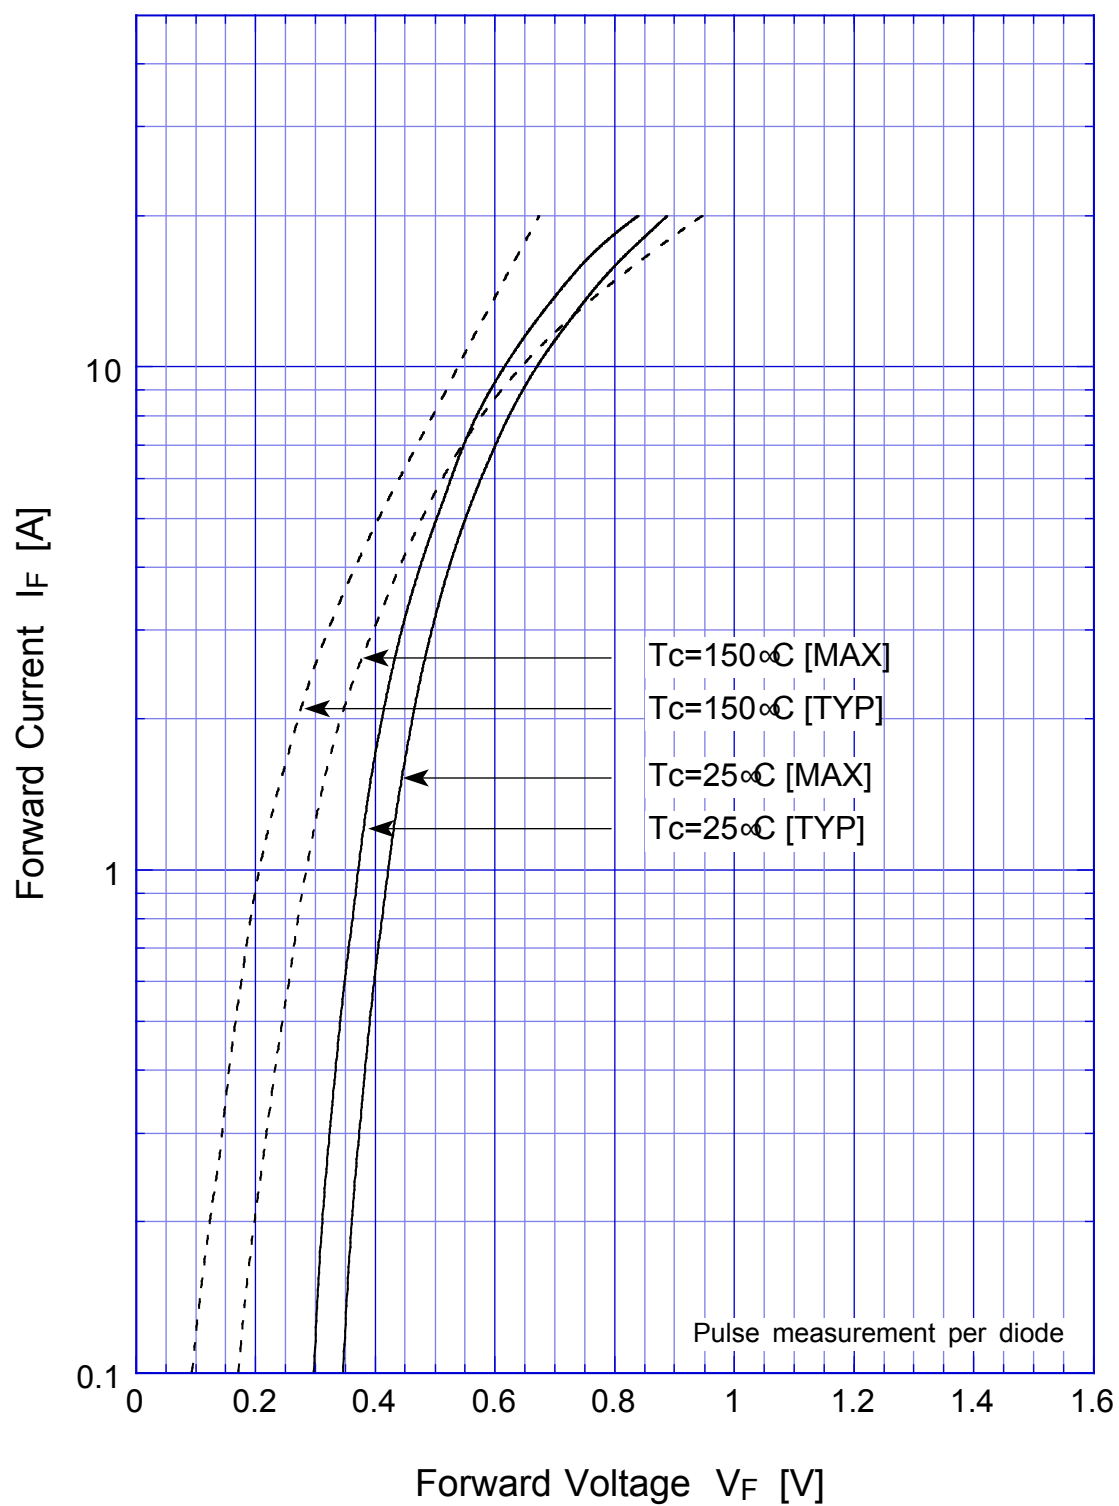


S10SC4M Junction Capacitance

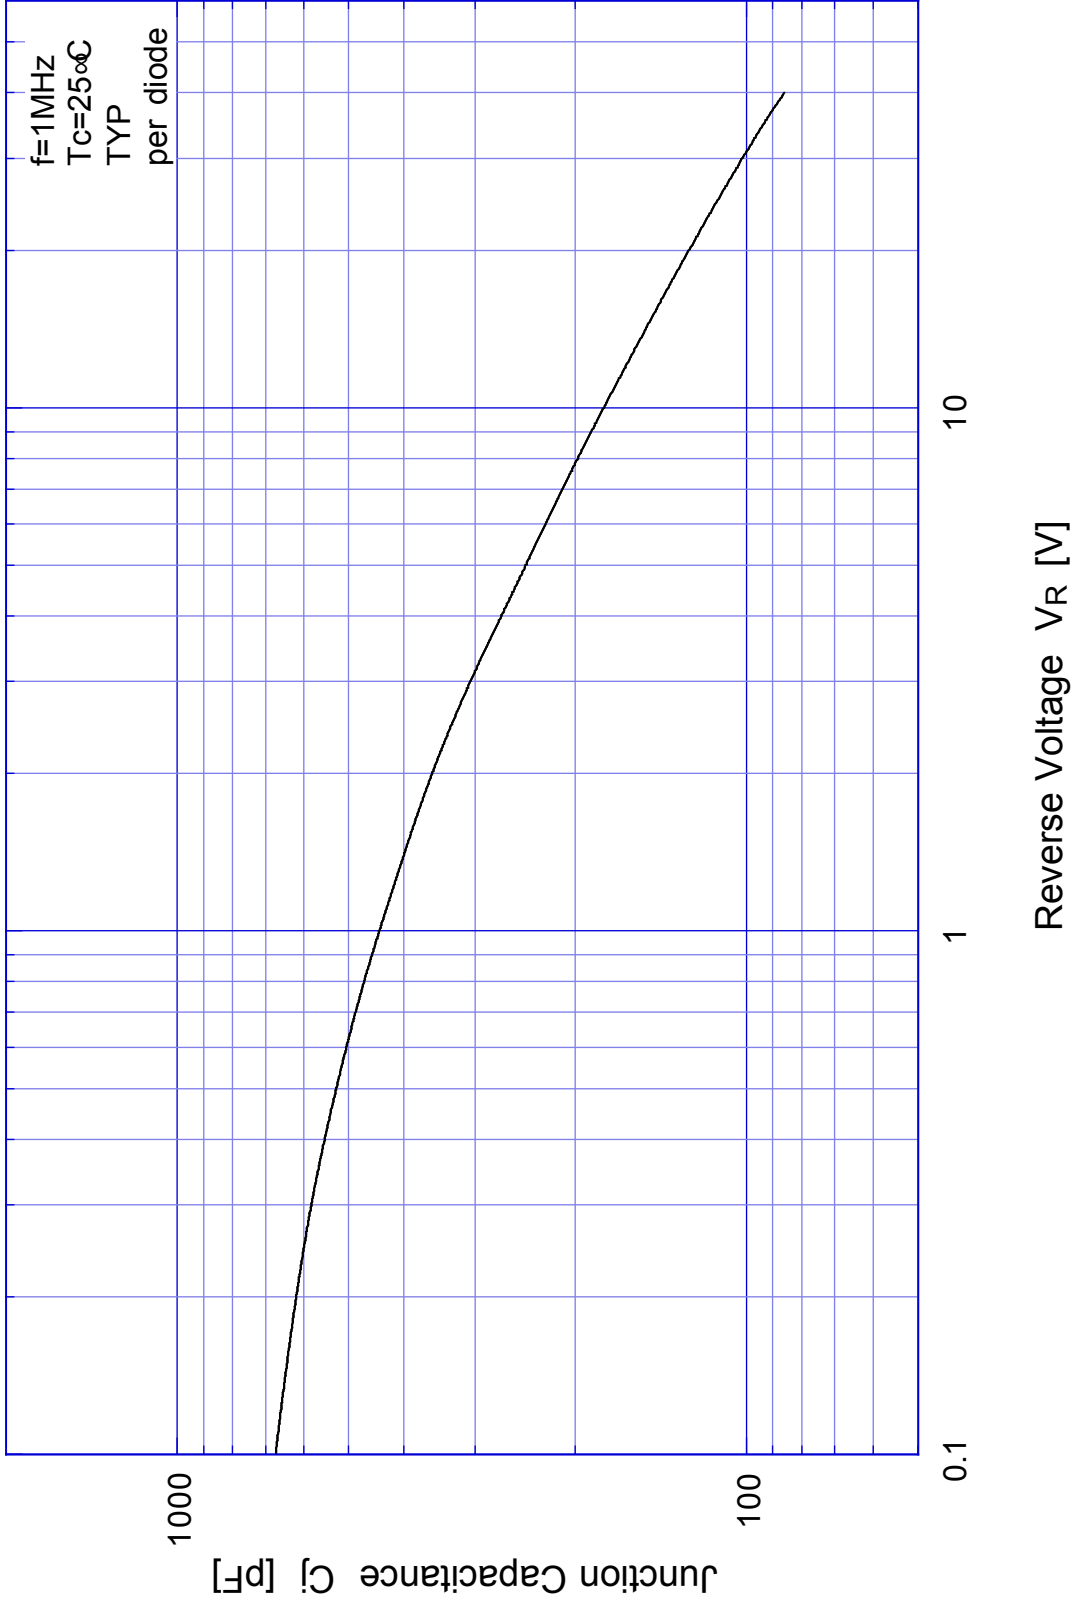


S10SC4M

Reverse Current

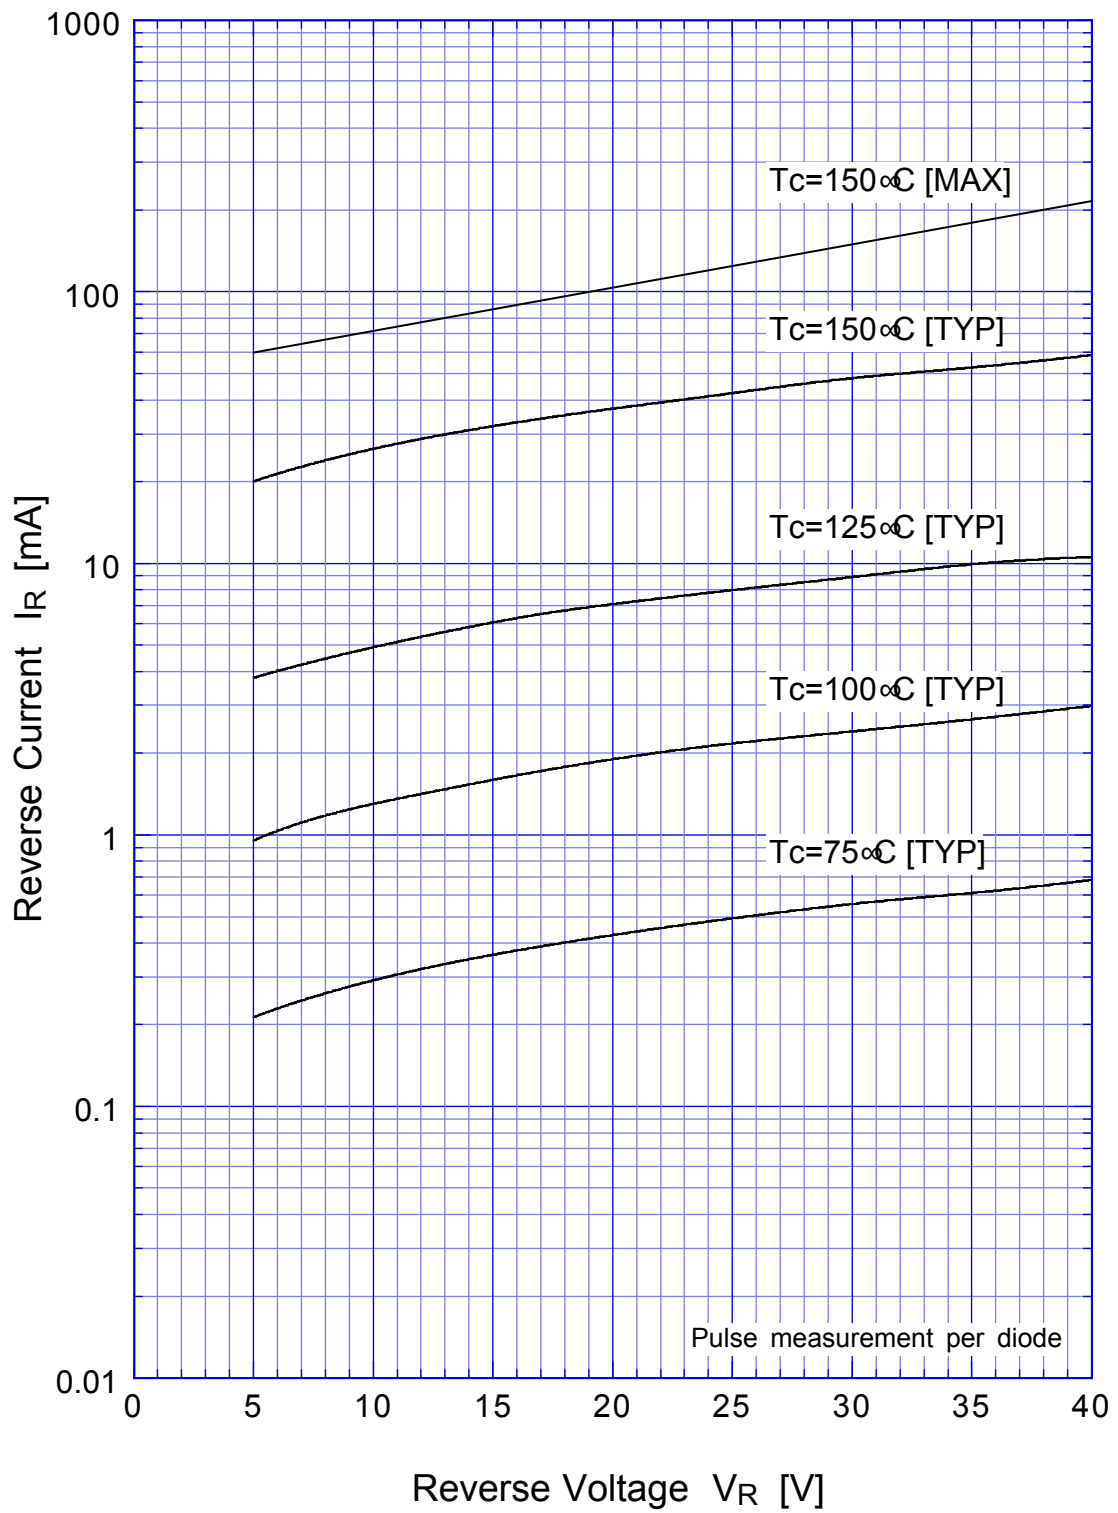


S10SC4M


Reverse Power Dissipation

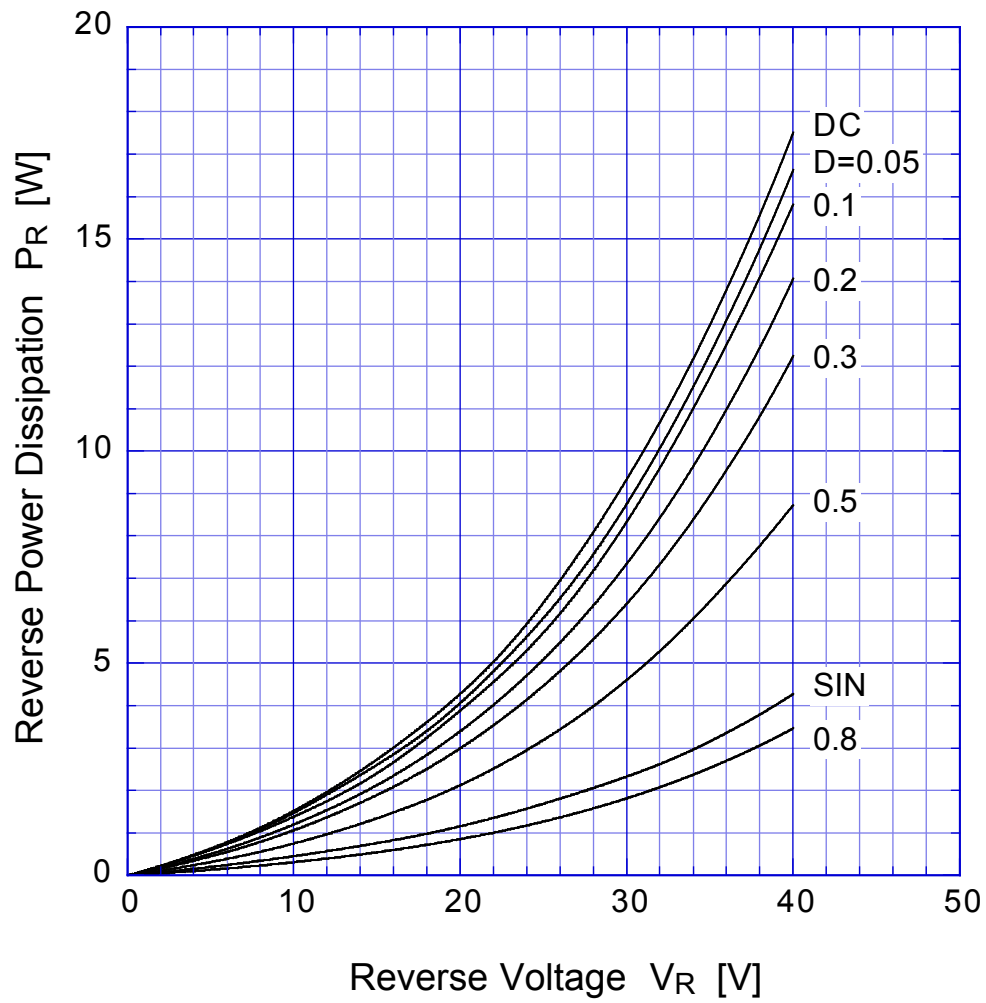


$T_j = 150^\circ\text{C}$

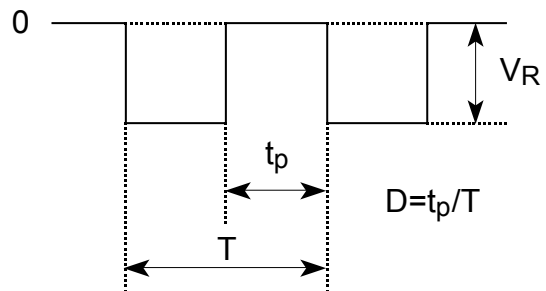

S10SC4M Forward Power Dissipation

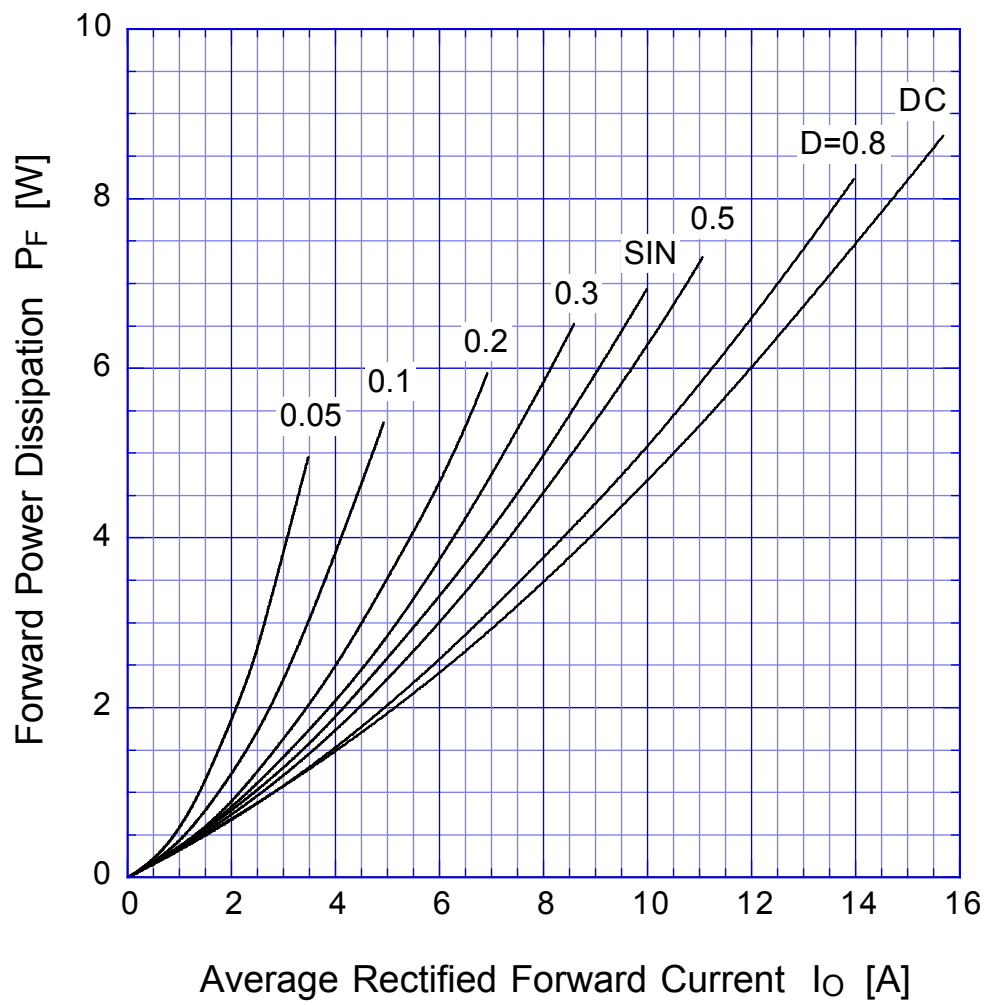


$T_j = 150^\circ\text{C}$

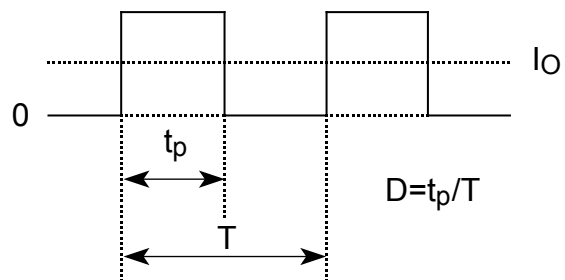


S10SC4M


Derating Curve

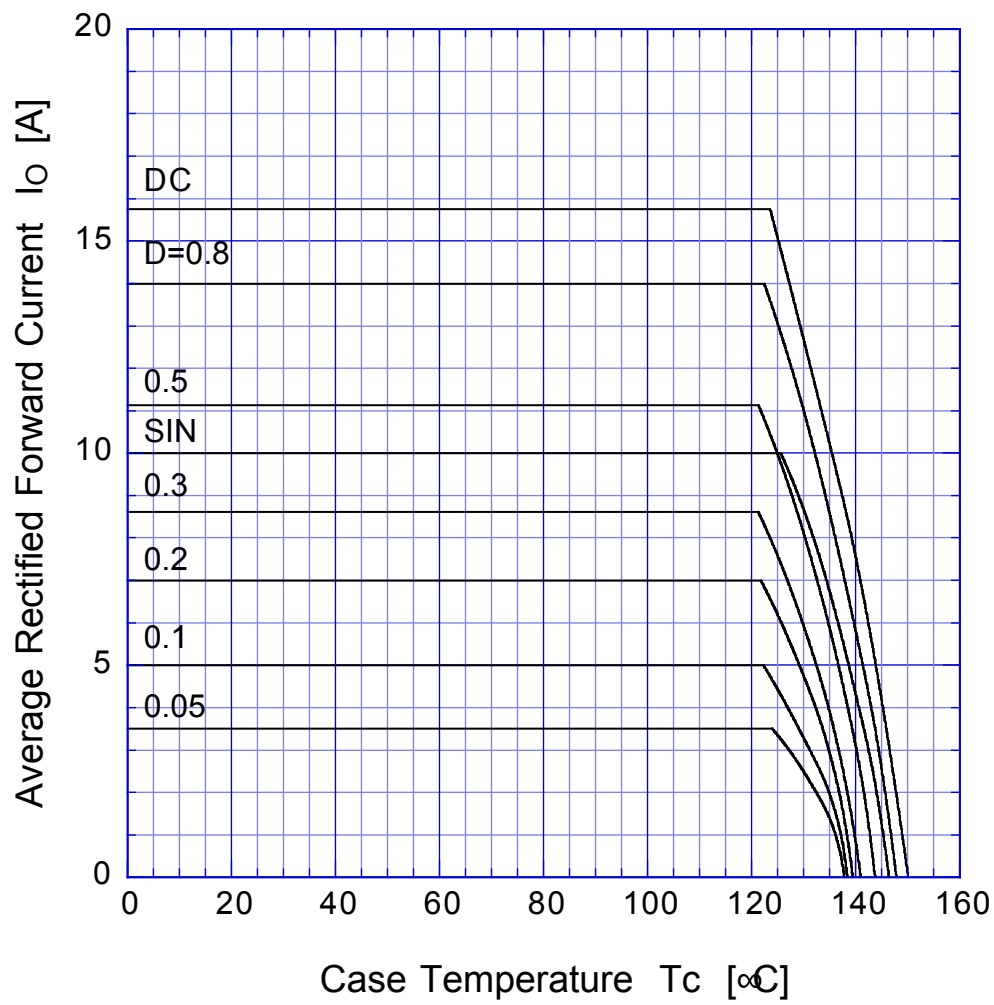

$V_R = 20V$

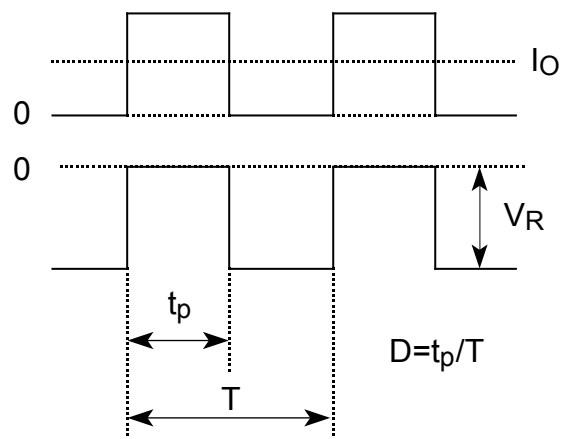

S10SC4M Peak Surge Forward Capability

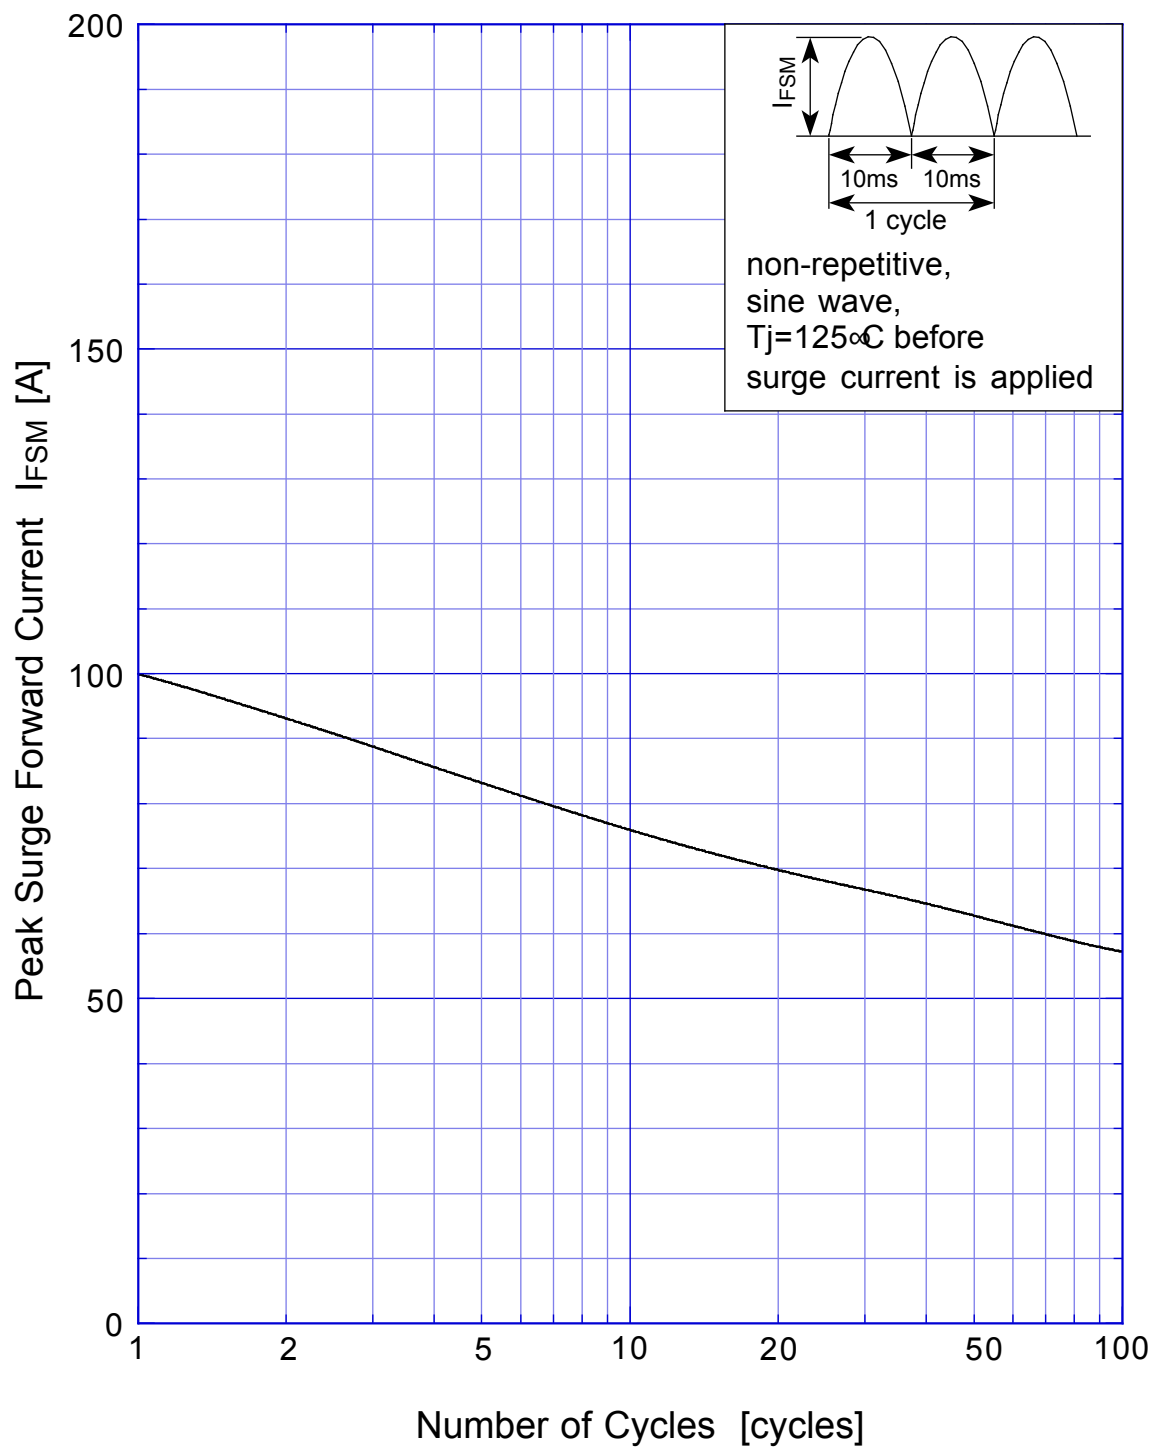

SBD Repetitive Surge Reverse Power Derating Curve

