


S5VB20

200V 6A

OUTLINE DIMENSIONS

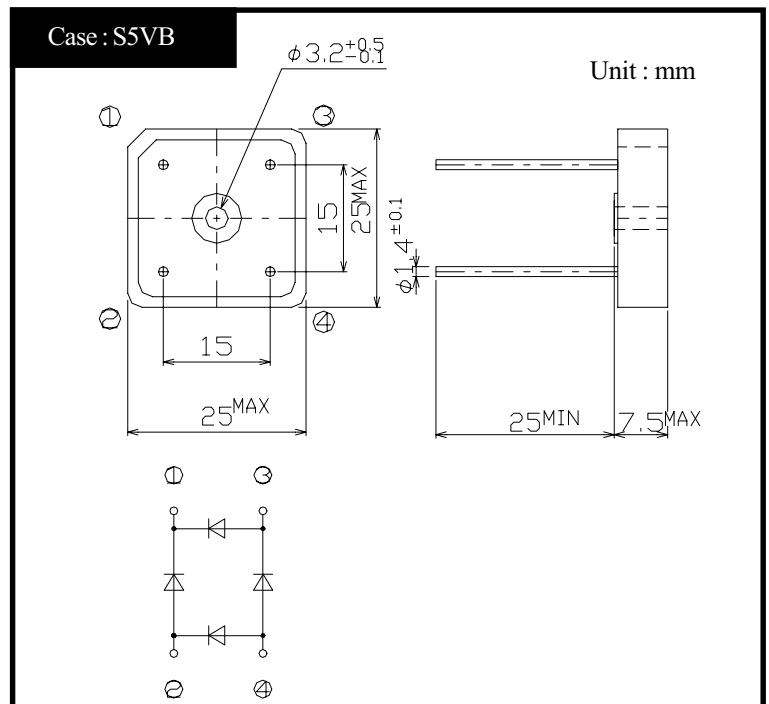

RATINGS

- Absolute Maximum Ratings


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T _{stg}		-40~150	°C
Operating Junction Temperature	T _j		150	°C
Maximum Reverse Voltage	V _{RM}		200	V
Average Rectified Forward Current	I _O	50Hz sine wave, R-load, Ta=40°C With heatsink $\theta_{fa}=6.4^{\circ}\text{C/W}$	6	A
		50Hz sine wave, R-load, Ta=40°C Without heatsink	3.5	
Peak Surge Forward Current	I _{FSM}	50Hz sine wave, Non-repetitive 1cycle peak value, T _j =25°C	200	A
Current Squared Time	I ² t	2ms≤t<10ms T _j =25°C	150	A ² s
Mounting Torque	TOR	(Recommended torque : 0.5N·m)	0.8	N·m

● Electrical Characteristics (Tl=25°C)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V_F	$I_F=3A$, Pulse measurement, Rating of per diode	Max.1.05	V
Reverse Current	I_R	$V_R=V_{RM}$, Pulse measurement, Rating of per diode	Max.10	μA
Thermal Resistance	θ_{jl}	junction to lead	Max.3	$^{\circ}C/W$


S5VBx

Forward Voltage

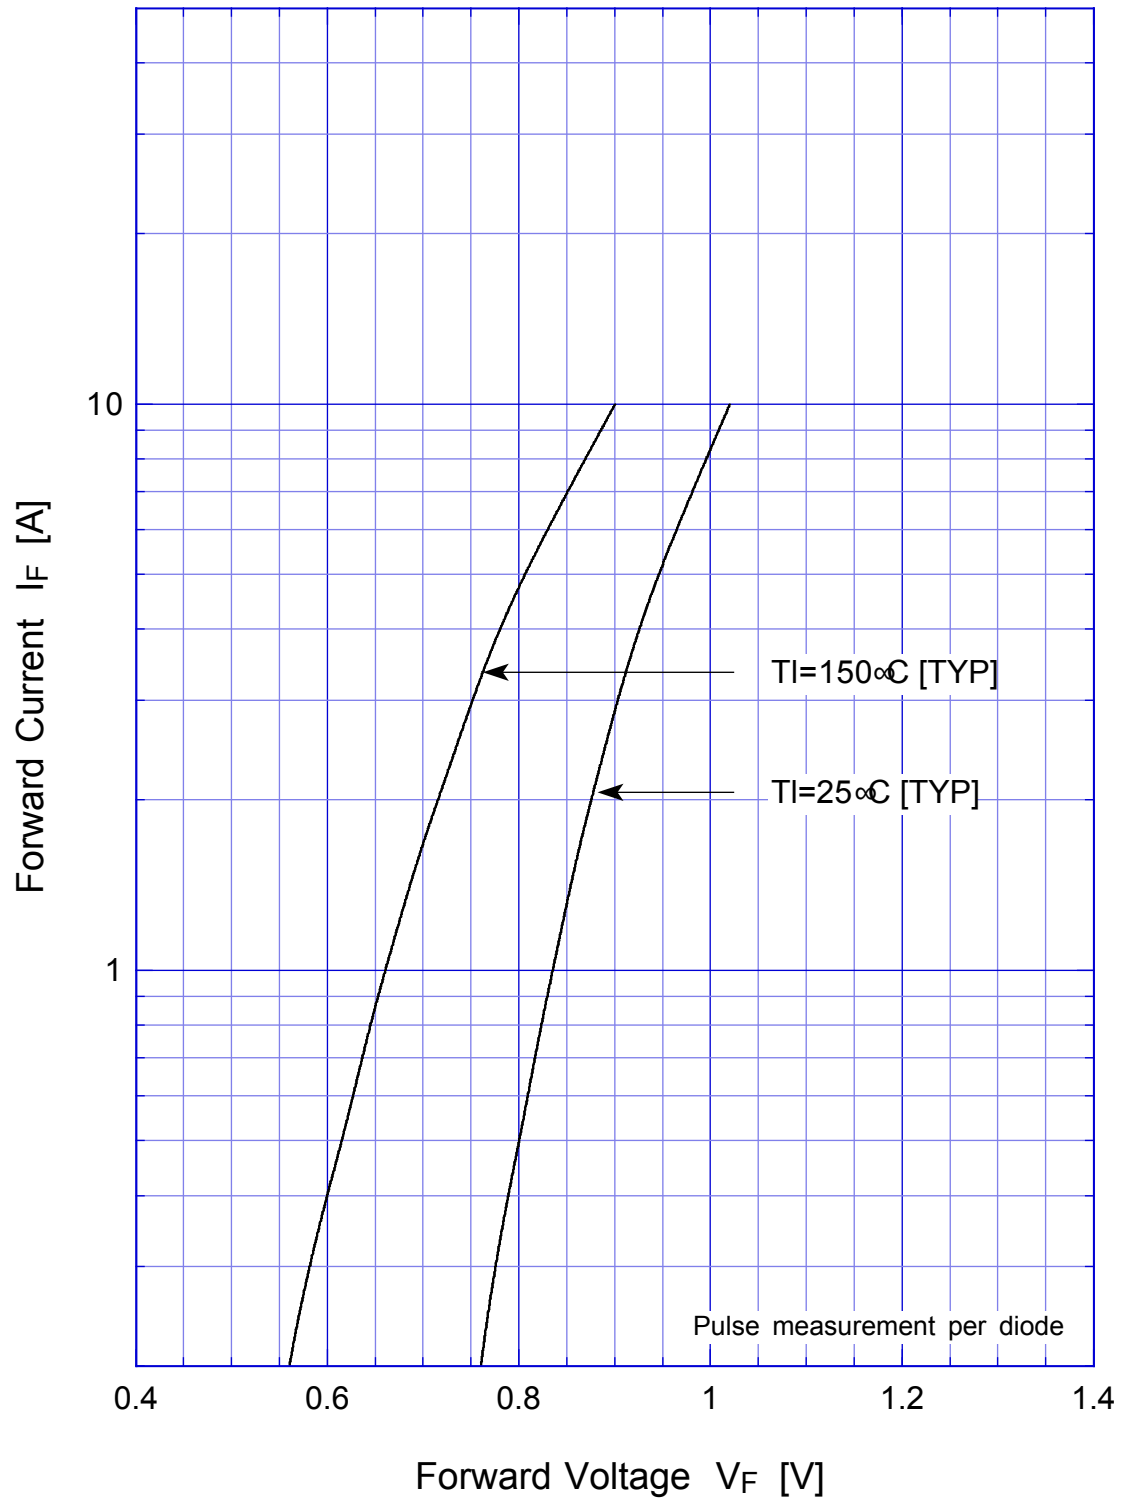

S5VBx

Forward Power Dissipation

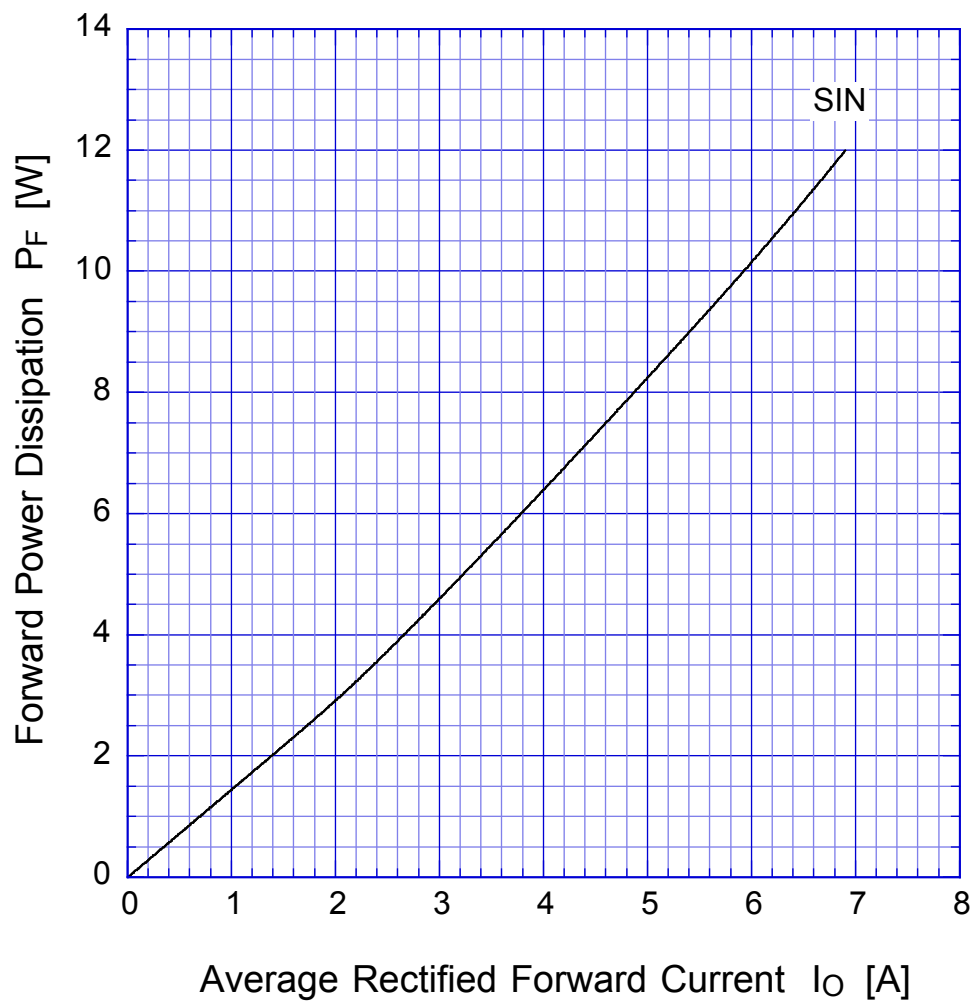


$T_j = 150^\circ\text{C}$

Sine wave

S5VBx

Derating Curve

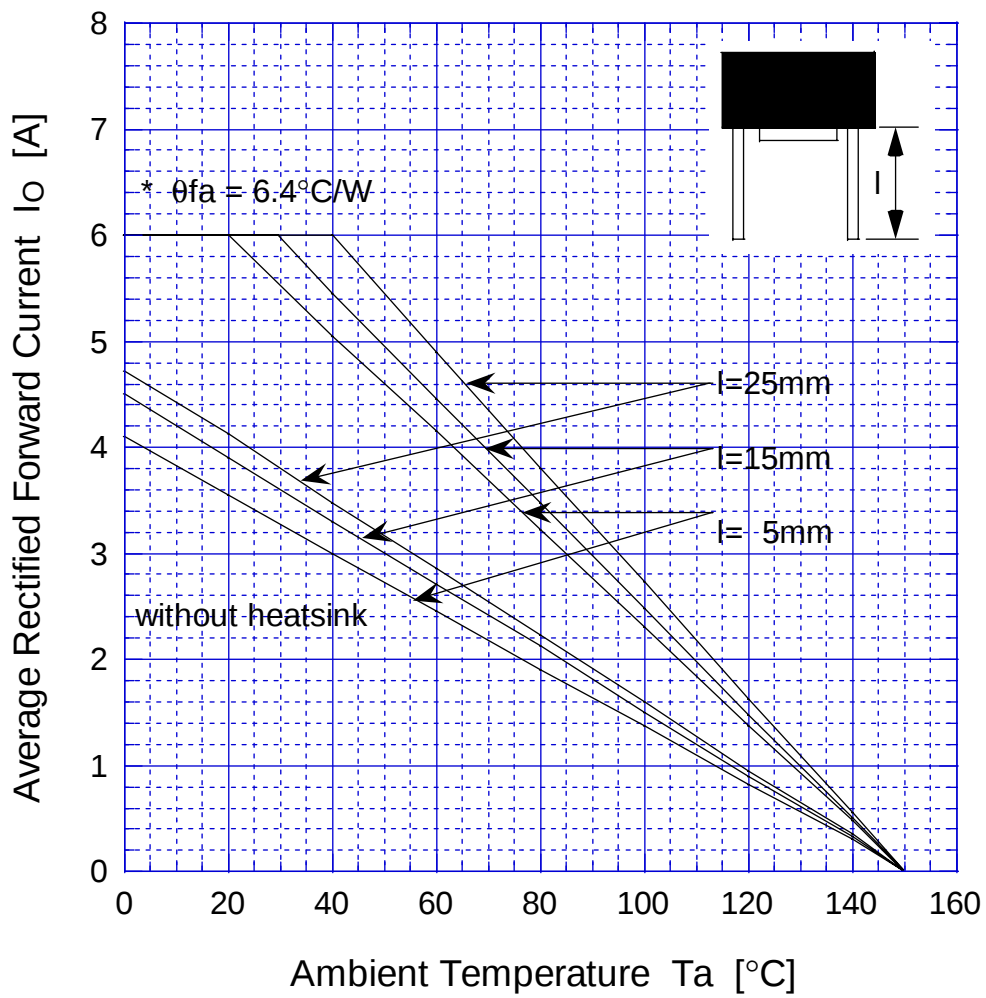

Sine wave

R-load

Free in air

* with thermal compound, TOR=0.5N-m

S5VBx

Peak Surge Forward Capability

