

S2L60

600V 1.5A

FEATURES

- High voltage super FRD
- Low noise
- trr50ns
- Applicable to Automatic Insertion


APPLICATION

- PFC
- Switching power supply
- Free Wheel
- Home Appliances, Office Equipment

OUTLINE DIMENSIONS

Case : AX10

(Unit : mm)

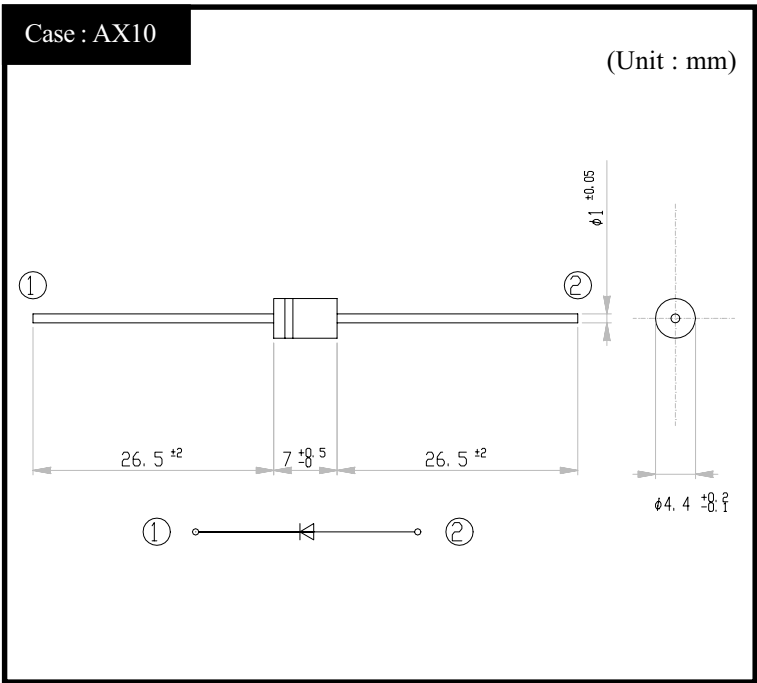


RATINGS

● Absolute Maximum Ratings (If not specified Tl=25°C)

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-55~150	°C
Operating Junction Temperature	Tj		150	°C
Maximum Reverse Voltage	VRM		600	V
Average Rectified Forward Current	IO	50Hz sine wave, R-load, Ta=25°C	1.2	A
		50Hz sine wave, R-load, Tl=125°C	1.5	
Peak Surge Forward Current	IFSM	50Hz sine wave, Non-repetitive 1 cycle peak value, Tj=25°C	50	A


● Electrical Characteristics (If not specified Tl=25°C)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	VF	IF=1.5A, Pulse measurement	Max.1.5	V
Reverse Current	IR	VR=VRM, Pulse measurement	Max.10	μA
Reverse Recovery Time	trr	IF=0.5A, IR=1A	Max.50	ns
Thermal Resistance	θjl	junction to lead	Max.12	°C/W
	θja	junction to ambient	Max.83	

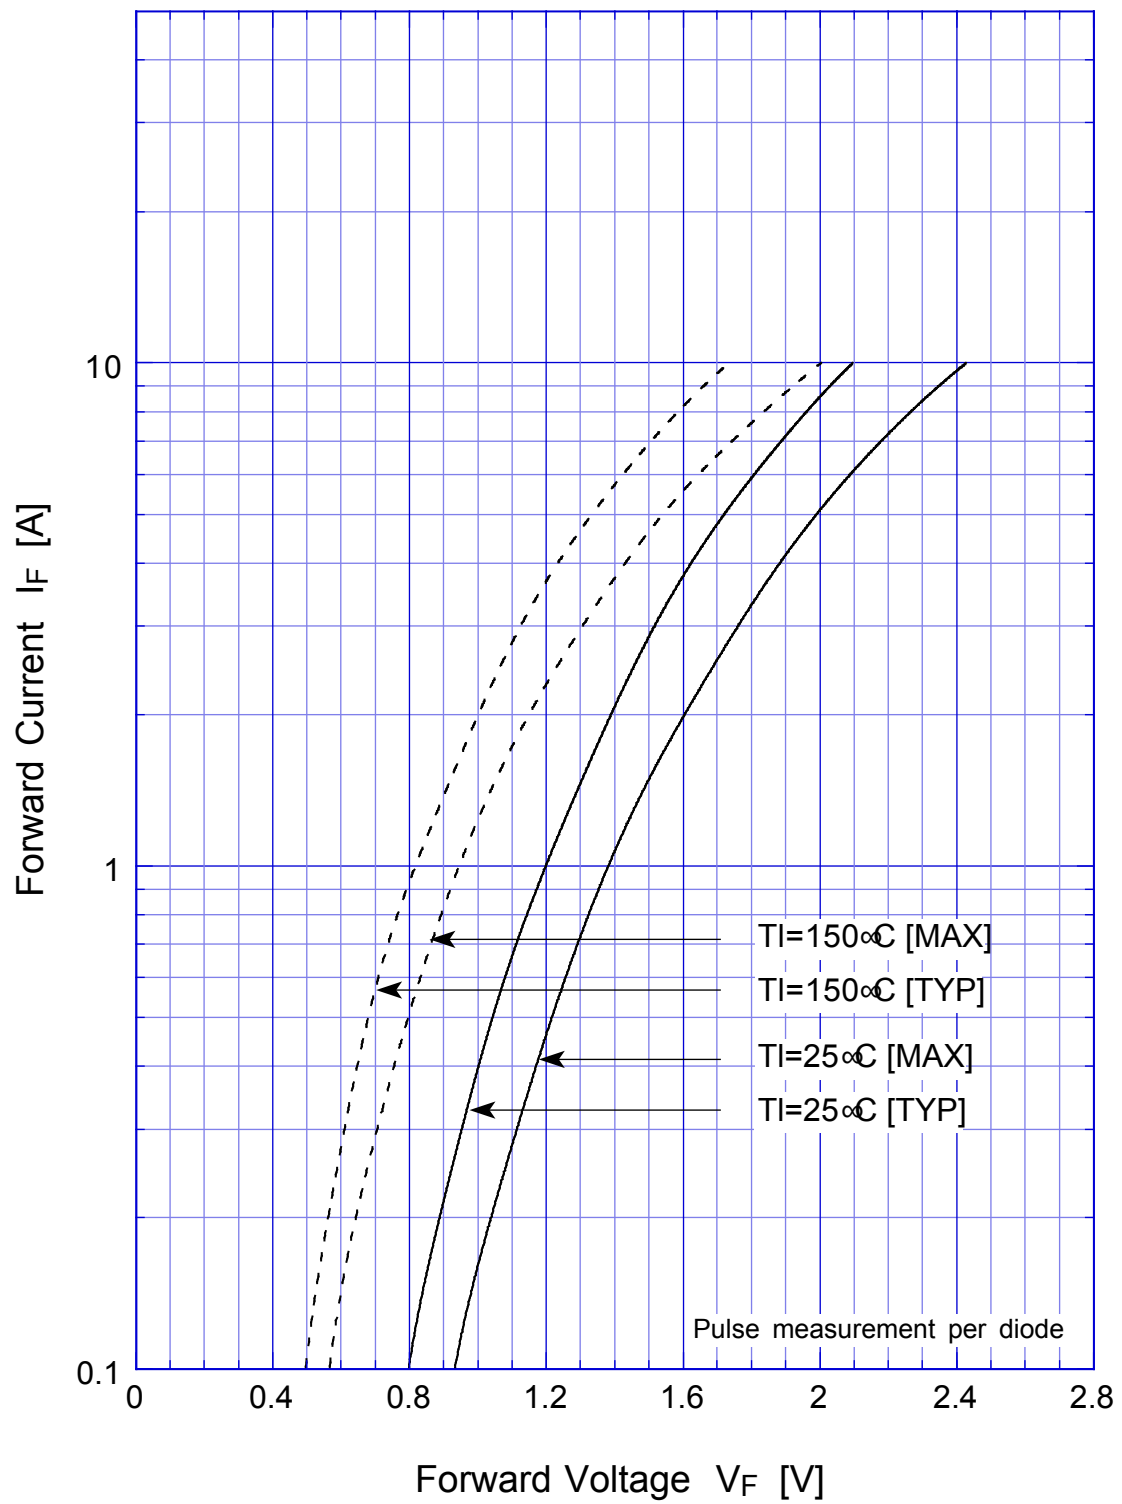

S2L60

Forward Power Dissipation

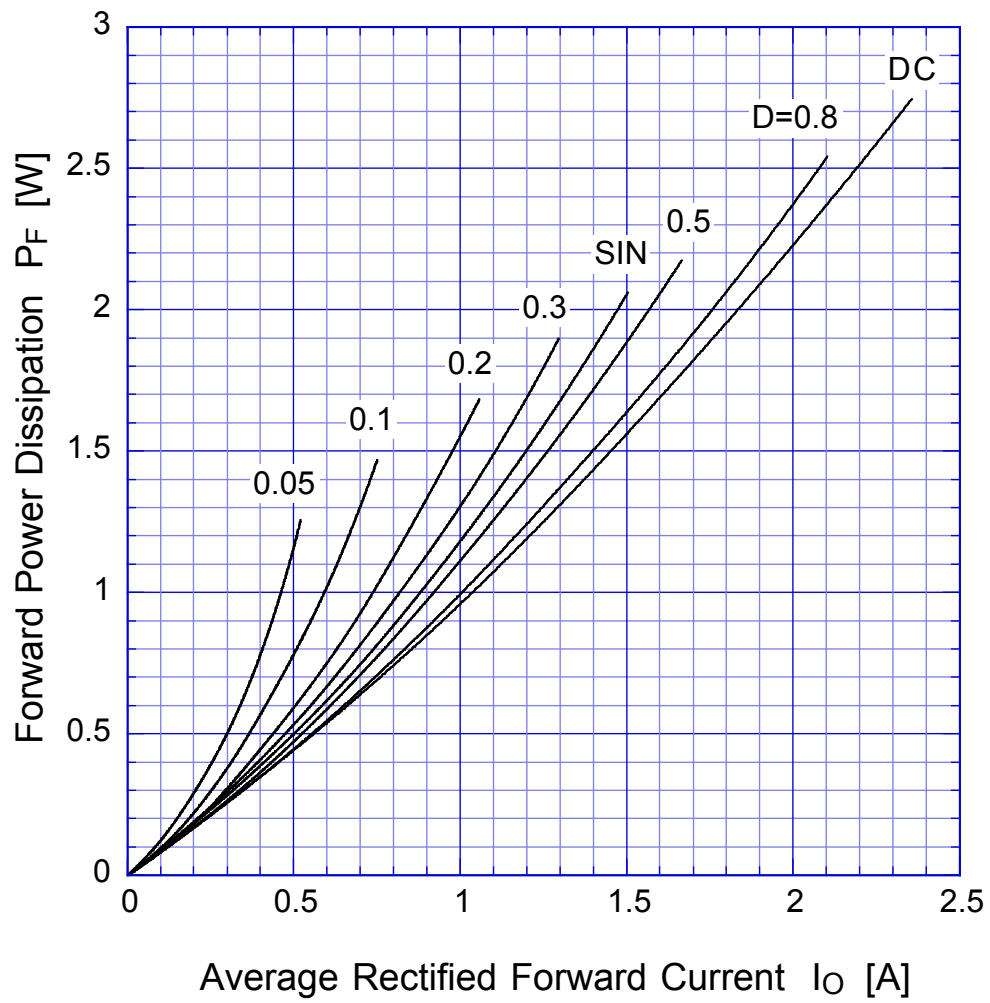


$T_j = T_{jmax}$




S2L60

Derating Curve

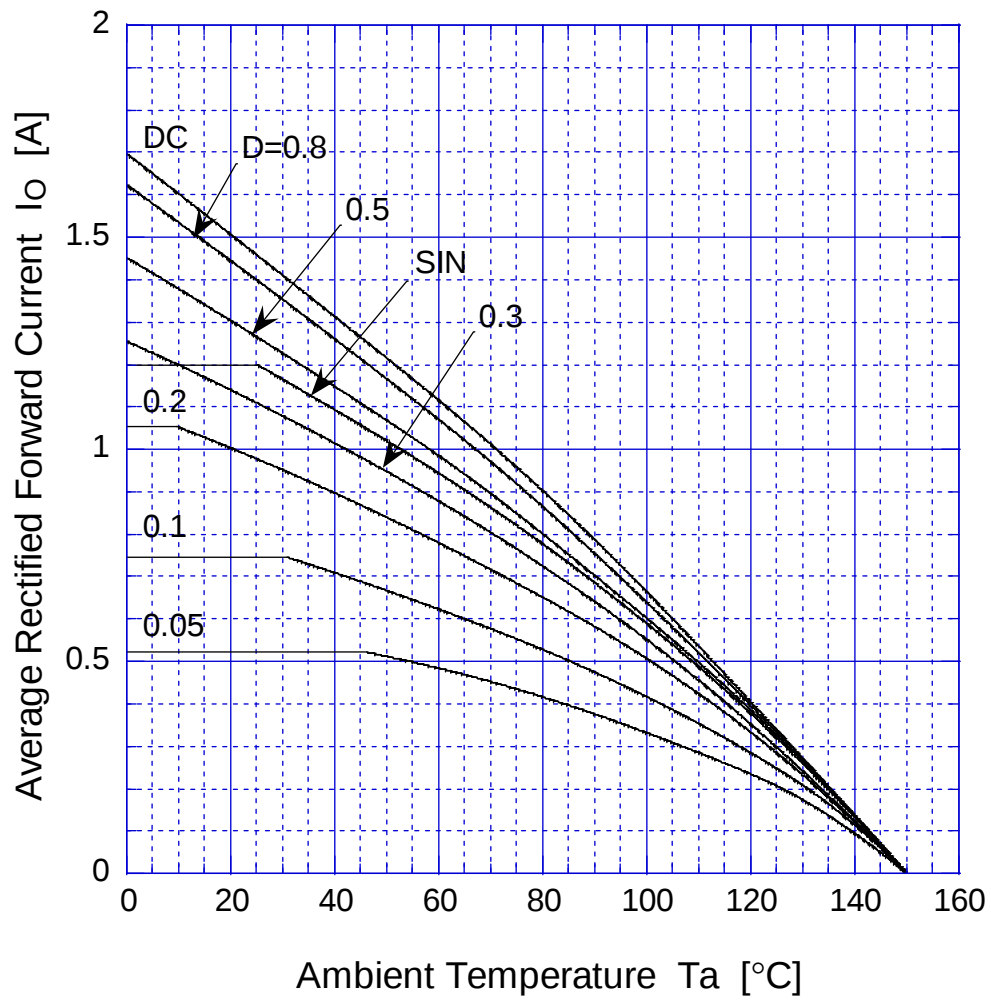


$V_R = V_{RM}$

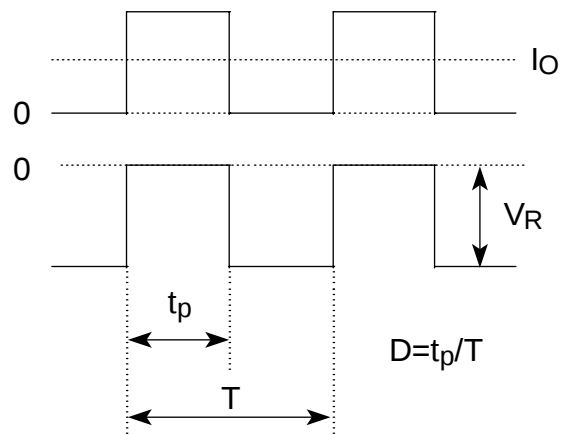



S2L60

Derating Curve

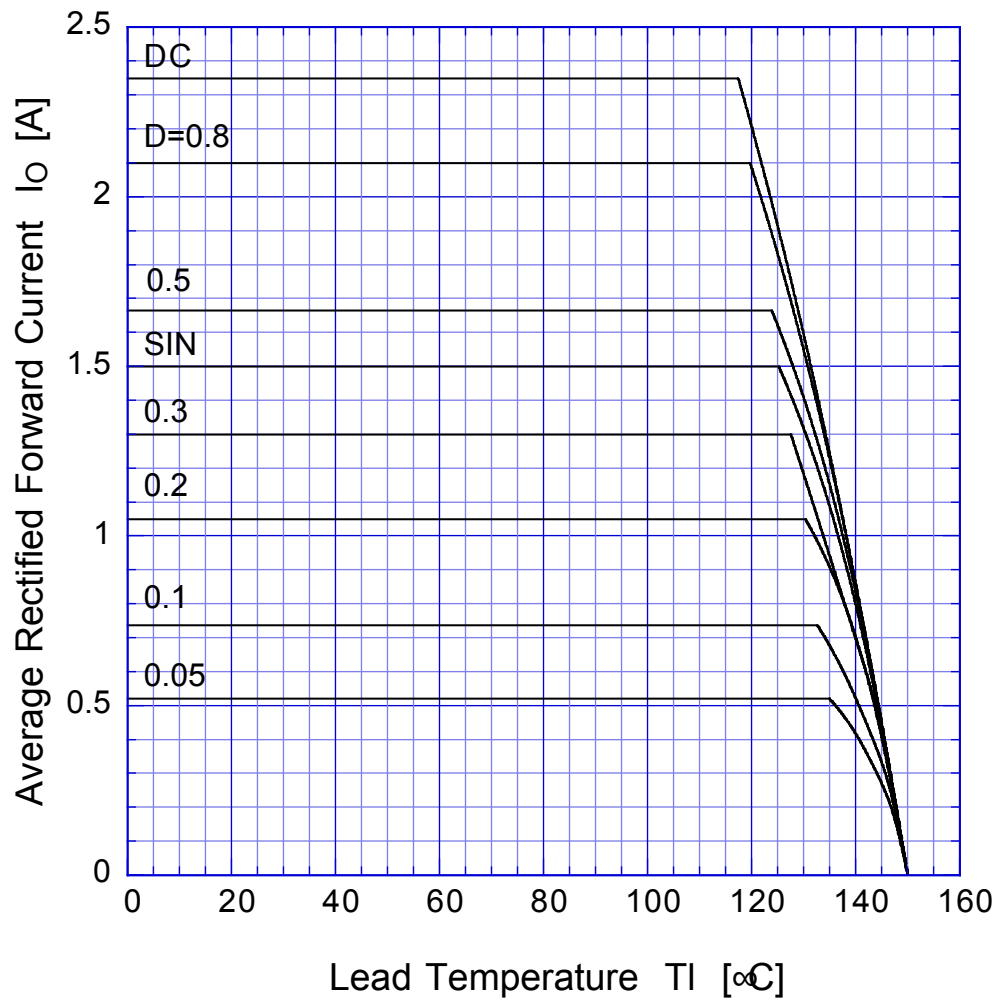

$$V_R = V_{RM}$$

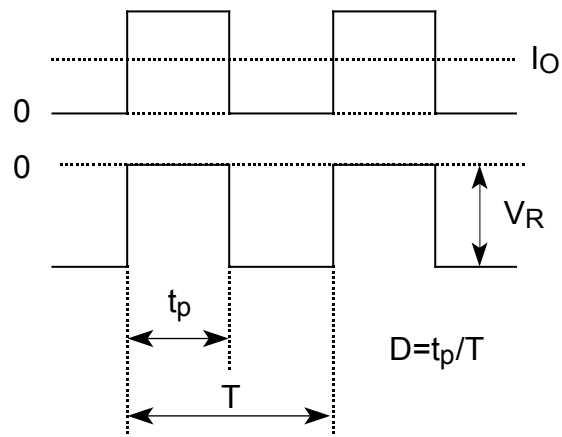

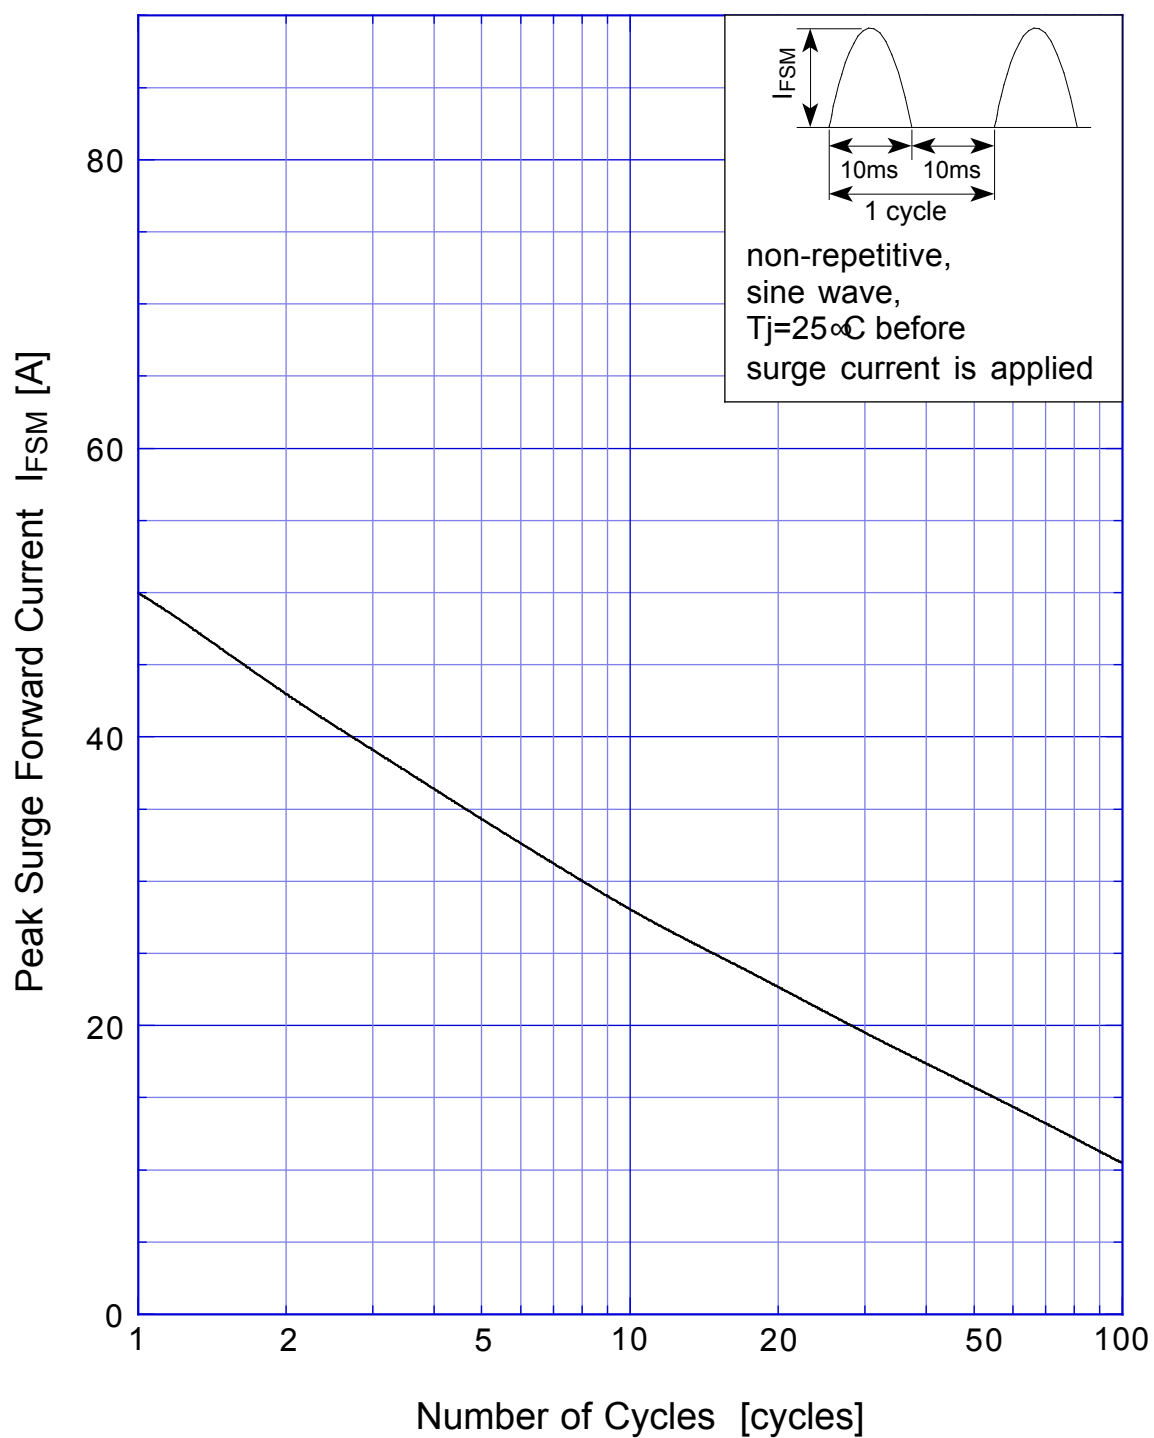

S2L60 Junction Capacitance

