



Description

The S19226 SONET/SDH and 10 Gigabit Ethernet (GbE) transceiver is one of the latest additions to AMCC's SuperPHY™ product family. The S19226 device provides fully integrated serialization/deserialization capabilities for low power, cost sensitive Short Reach OC-192 applications. The device performs all necessary parallel-to-serial and serial-to-parallel functions in conformance with SONET/SDH and 10 GbE transmission standards. The standard operating range is from 9.953 Gbps to 10.7 Gbps. Figure 1, *System Block Diagram*, shows a typical network application.

Overview

The S19226 can be used to implement the front end of SONET/SDH/FEC/10GbE equipment which consists primarily of the serial transmit interface

and the serial receive interface. The system timing circuitry consists of a high-speed phase detector, clock dividers, and clock distribution. The device utilizes on-chip clock synthesis PLL components that allow the use of a slower external clock reference, 155.52 MHz or 622.08 MHz (or equivalent FEC/10 GbE rate), in support of existing system clocking schemes. The low-jitter, 16-bit, Low Voltage Differential Signaling (LVDS) interfaces guarantee compliance with the bit-error rate requirements of the Telecordia and ITU-T standards.

AMCC Suggested Interface Devices

VERRAZANO (S2509)	Quad STS-48 SONET/SDH/Digital Wrapper Backplane SERDES
GANGES (S19202)	STS-192 POS/ATM SONET/SDH Mapper
GANGES II (S19202)	STS-192 POS/ATM SONET/SDH Mapper
HUDSON (S19203)	Variable Rate Digital Wrapper Framer/Deframer, Performance Monitor, and FEC Device
MEKONG (S19204)	STS-192 Pointer Processor
KHATANGA (S19205)	STS-192c SONET/SDH Framer/Mapper with Integrated MAC
S3095	OC-192 Post Amp w/AGC

- At a Glance -

General Features

- Operational from 9.953 Gbps to 10.7 Gbps
- Low Power (700mW Typical)
- Built-In Self Test (BIST) Feature
- On-chip High-Frequency PLL for Clock Generation and Clock Recovery
- 16-bit LVDS Parallel Data Path
- TX and RX Lock Detect Indication
- Serial and Reference Loop Timing Modes
- Line and Diagnostic Loopback Mode for Faulty Node Identification
- Operational Temperature Range Up to 85°C
- Supports Management Data Bus for Control I/O
- Complies with OIF SFI-4/Telecordia/ITU-T Specifications

Transmitter Features

- Reference frequency of 155.52 or 622.08 MHz (or equivalent FEC/10GbE rate)

Continued on next page...

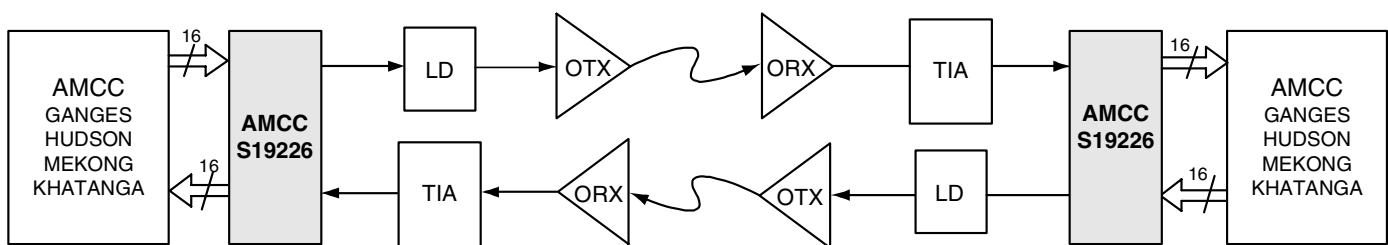


Figure 1. System Block Diagram

The sequence of operations is as follows:

Transmitter Operations

1. 16-bit parallel input
2. Parallel-to-serial conversion
3. Serial data output

Receiver Operations

1. Serial input to limiting post-amp
2. Clock and Data recovery
3. Serial-to-parallel conversion
4. 16-bit parallel data and clock output

Internal clocking and control functions are transparent to the user.

Prefix	Device	Package
S – Integrated Circuit	19226	PB

X
Prefix

XXXXX
Device

XX
Package

Figure 2. S19226 Ordering Information

Transmitter Features (cont.)

- 155.52 MHz and 622.08 MHz (or equivalent FEC/10GbE rate) clock outputs
- Internal, self-initializing FIFO to decouple transmit clocks

Receiver Features

- Recovers clock from 9.953 to 10.7 Gbps
- Low-jitter CML differential or single-ended serial interface
- Reference frequency of 155.52 MHz (or equivalent FEC/10 GB Ethernet rate)

Applications

- SONET/SDH-based transmission systems
- SONET/SDH modules
- 10GbE based transmission systems
- Section repeaters
- Add Drop Multiplexers (ADM)
- Broad-band cross-connects
- Fiber Optic Terminators
- Fiber Optic Test Equipment

AMCC reserves the right to make changes to its products, or to discontinue any product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied upon is current.

AMCC is a registered trademark of Applied Micro Circuits Corporation. Copyright © 2002 Applied Micro Circuits Corporation. All Rights Reserved.

Confidential and Proprietary

AMCC
APPLIED MICRO CIRCUITS CORPORATION

Distribute only on a need-to-know basis, and subject to applicable NDA. Not to be disclosed to or used by any other person without prior authorization.

6290 Sequence Drive • San Diego, CA 92121 • Tel: 858 450-9333 • Fax: 858 450-9885 • <http://www.amcc.com>
For technical support, please call 800 840-6055 or email productsupport@amcc.com