


Si PIN photodiode S6968 series

φ14 mm lens plastic package

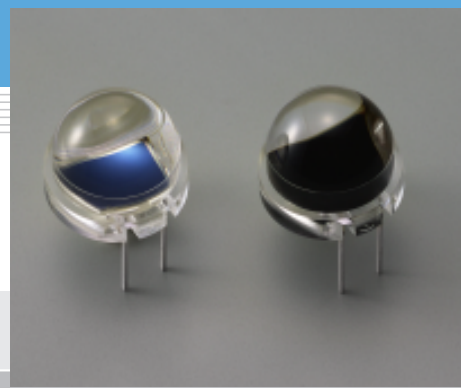

S6968 series is a Si PIN photodiode molded into a plastic package with a φ14 mm lens. Two types are provided, S6968 with a clear plastic package and S6968-01 with a visible-cut package.

Features

- Plastic packages with φ14 mm lens
- High-speed response: 50 MHz Typ. ($V_R=10$ V, $\lambda=850$ nm)
- High sensitivity: 0.63 A/W ($\lambda=850$ nm)
- Directivity: 35 ° (half angle)
- Visible-cut type (S6968-01)
- Active area size: φ14 mm
- Effective active area: 150 mm²

Applications

- Spatial light transmission
- Optical communication
- Optical data link
- High-speed optical measurement
- Optical switch
- Laser radar


Absolute maximum ratings

Parameter	Symbol	Value	Unit
Reverse voltage	V_R Max.	35	V
Operating temperature	T_{opr}	-25 to +85	°C
Storage temperature	T_{stg}	-40 to +100	°C


Electrical and optical characteristics ($T_a=25$ °C)

Parameter	Symbol	Condition	S6968			S6968-01			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	
Spectral response range	λ		-	320 to 1060	-	-	700 to 1060	-	nm
Peak sensitivity wavelength	λ_p		-	920	-	-	920	-	nm
Photo sensitivity	S	$\lambda=850$ nm	0.57	0.63	-	0.5	0.55	-	A/W
Short circuit current	I_{sc}	100 k Ω , 2856 K	83	104	-	57	72	-	μA
Dark current	I_D	$V_R=10$ V	-	0.5	5	-	0.5	5	nA
Temperature coefficient of I_D	T_{CID}		-	1.15	-	-	1.15	-	times/°C
Cut-off frequency	f_c	$V_R=10$ V, $R_L=50$ Ω $\lambda=850$ nm, -3 dB	30	50	-	30	50	-	MHz
Terminal capacitance	C_t	$V_R=10$ V, $f=1$ MHz	-	50	100	-	50	100	pF
Half angle	-		-	±35	-	-	±35	-	degree


Spectral response

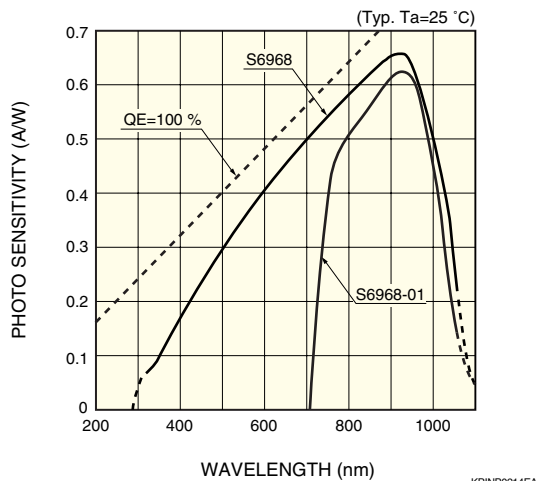


Dark current vs. reverse voltage

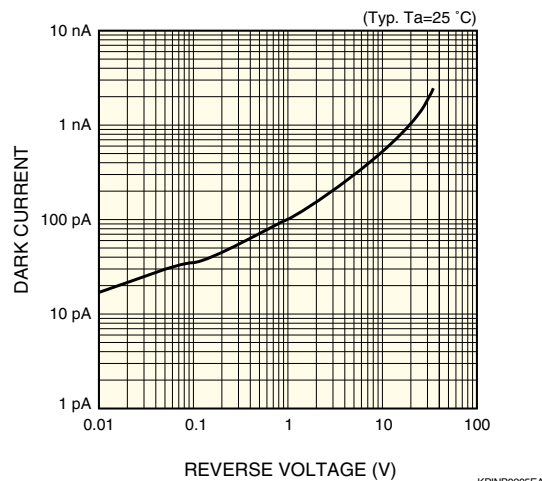


Cut-off frequency vs. reverse voltage

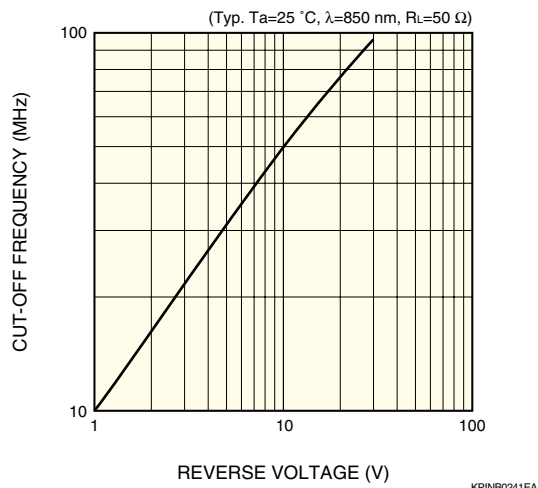

Terminal capacitance vs. reverse voltage

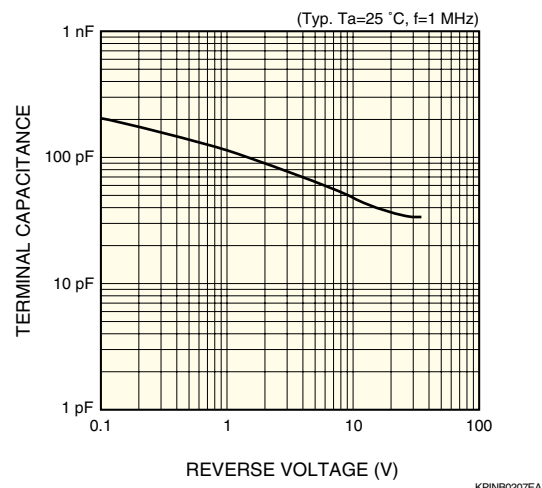


Directivity

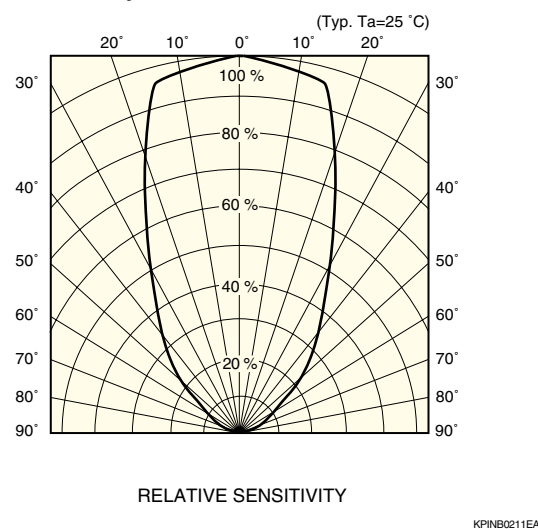

Dimensional outline

(unit: mm, tolerance unless otherwise noted: ± 0.1)

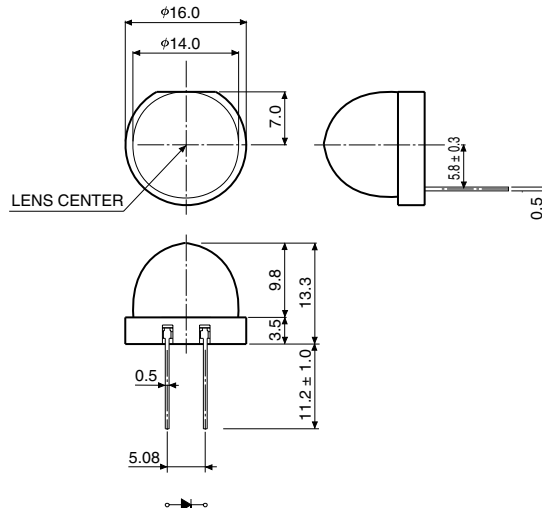

HAMAMATSU

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Hamamatsu City, 435-8558 Japan, Telephone: (81) 053-434-3311, Fax: (81) 053-434-5184, <http://www.hamamatsu.com>

U.S.A.: Hamamatsu Corporation, 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 08152-3750, Fax: (49) 08152-2658

France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741

Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2001 Hamamatsu Photonics K.K.