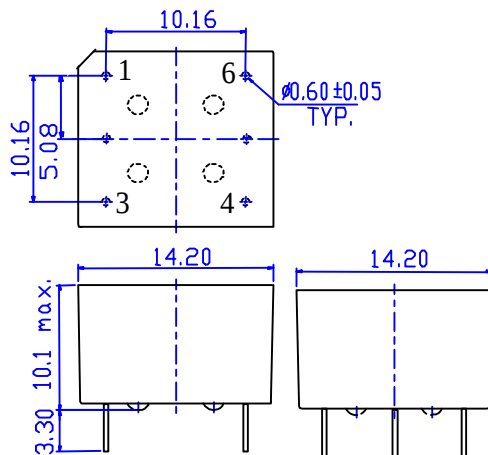


Feature

- ◆ Designed for G.703 Codirectional Interface.
- ◆ 1500 Vrms minimum isolation.
- ◆ Small encapsulated package

Specifications

Parameter	Condition		Min.	Typ.	Max.	Unit
Turn Ratio	Pin(1-3) : (4-6)			1 : 2		±2%
Inductance	Pin(1-3)	10KHz , 100mV	20.0			mH
Leakage inductance	Pin(1-3)	100KHz , 100mV			5.0	μH
C _{ww}	Pin(1-3) to (4-6)	10KHz , 100mV			150	PF
DCR	Pin(1-3)				2.65	Ω
DCR	Pin(4-6)				5.0	Ω
Voltage Isolation	Pin(1-3) to (4-6)	1 minute	1500			Vrms

Dimension

Schematic
