

SF5L30

300V 5A

FEATURES


- trr30ns
- Fully Isolated Molding
- Dielectric strength 2kV guaranteed

APPLICATION

- Switching power supply
- Free Wheel
- Home Appliances, Office Equipment
- Telecommunication, Factory Automation

OUTLINE DIMENSIONS

Case : FTO-220

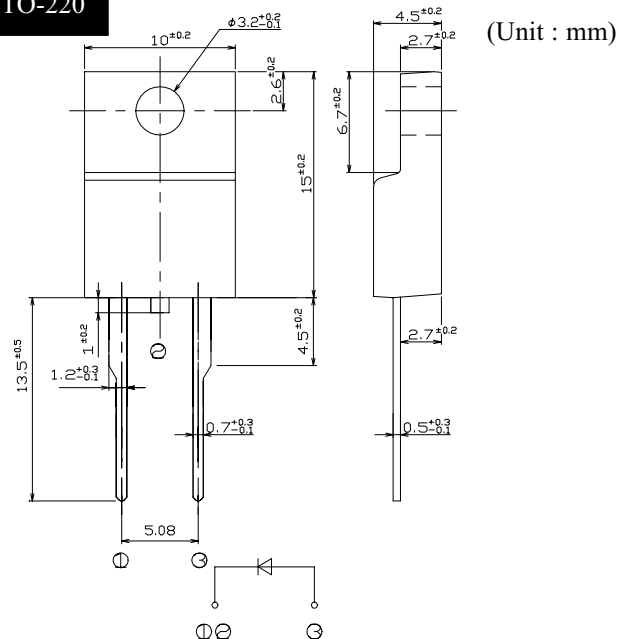

RATINGS

- Absolute Maximum Ratings (If not specified Tc=25°C)


Item	Symbol	Conditions	Rated Values	Unit
Storage Temperature	T _{stg}		-55~150	°C
Operating Junction Temperature	T _j		150	°C
Maximum Reverse Voltage	V _{RM}		300	V
Average Rectified Forward Current	I _O	50Hz sine wave, R-load, T _c =130°C	5	A
Peak Surge Forward Current	I _{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, T _j =25 °C	60	A
Dielectric Strength	V _{dis}	Terminals to case, AC 1 minute	2	kV
Mounting Torque	TOR	(Recommended torque : 0.3N·m)	0.5	N·m

- Electrical Characteristics (If not specified Tc=25°C)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V_F	$I_F=5A$, Pulse measurement	Max.1.3	V
Reverse Current	I_R	$V_R=V_{RM}$, Pulse measurement	Max.25	μA
Reverse Recovery Time	t_{rr}	$I_F=0.5A$, $I_R=1A$	Max.30	ns
Junction Capacitance	C_j	$f=1MHz$, $V_R=10V$	TYP 50	pF
Thermal Resistance	θ_{jc}	junction to case	Max.3.4	$^{\circ}C/W$


SF5L30

Forward Voltage

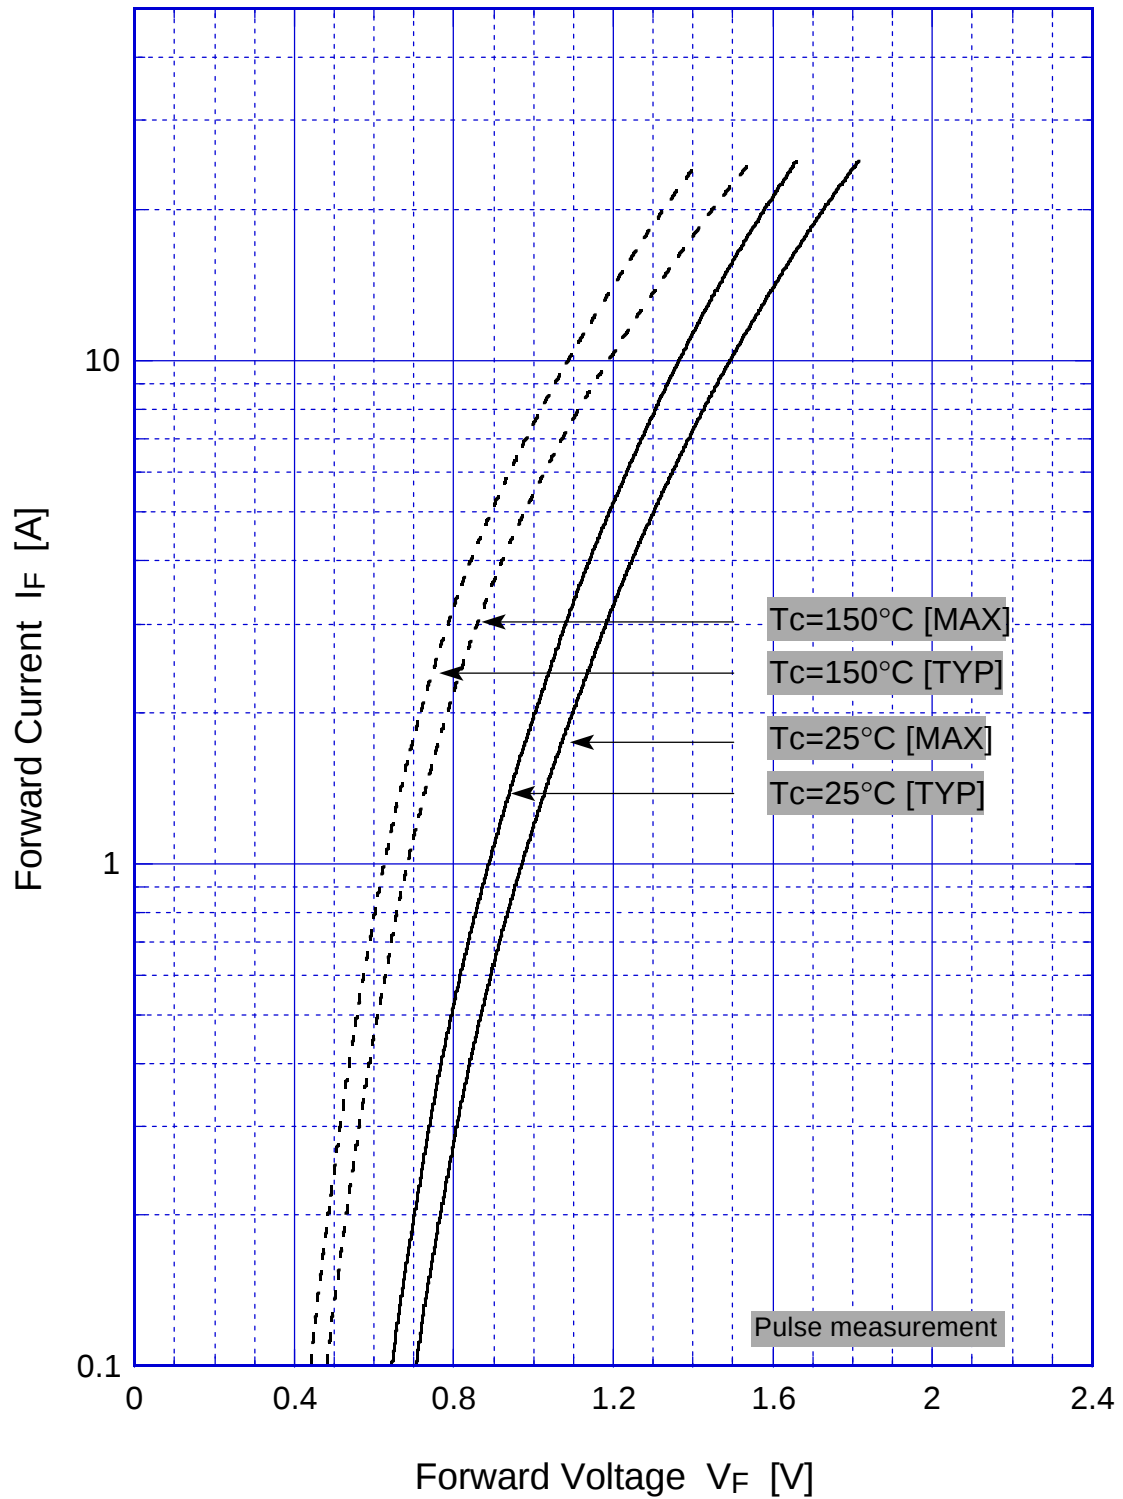


SF5L30

Forward Power Dissipation

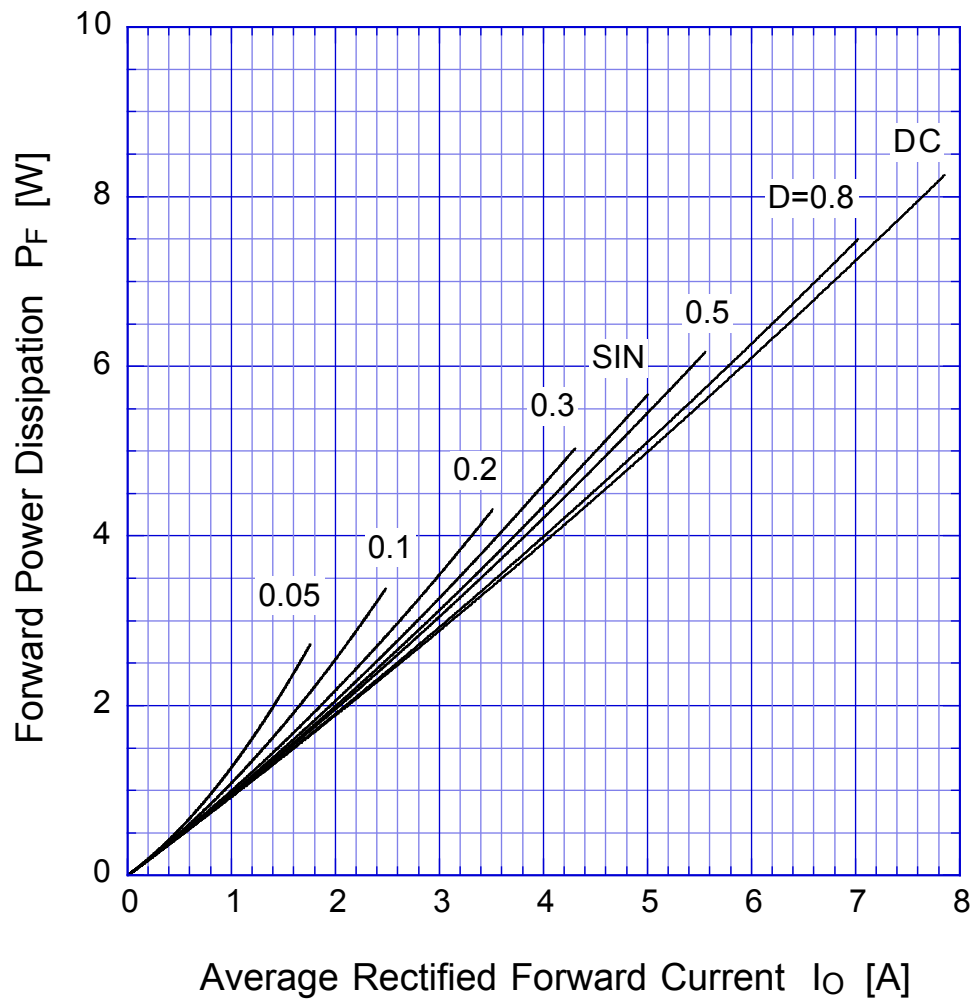


$T_j = 150^\circ\text{C}$

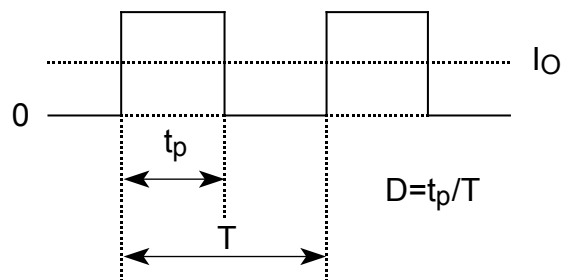


SF5L30

Peak Surge Forward Capability

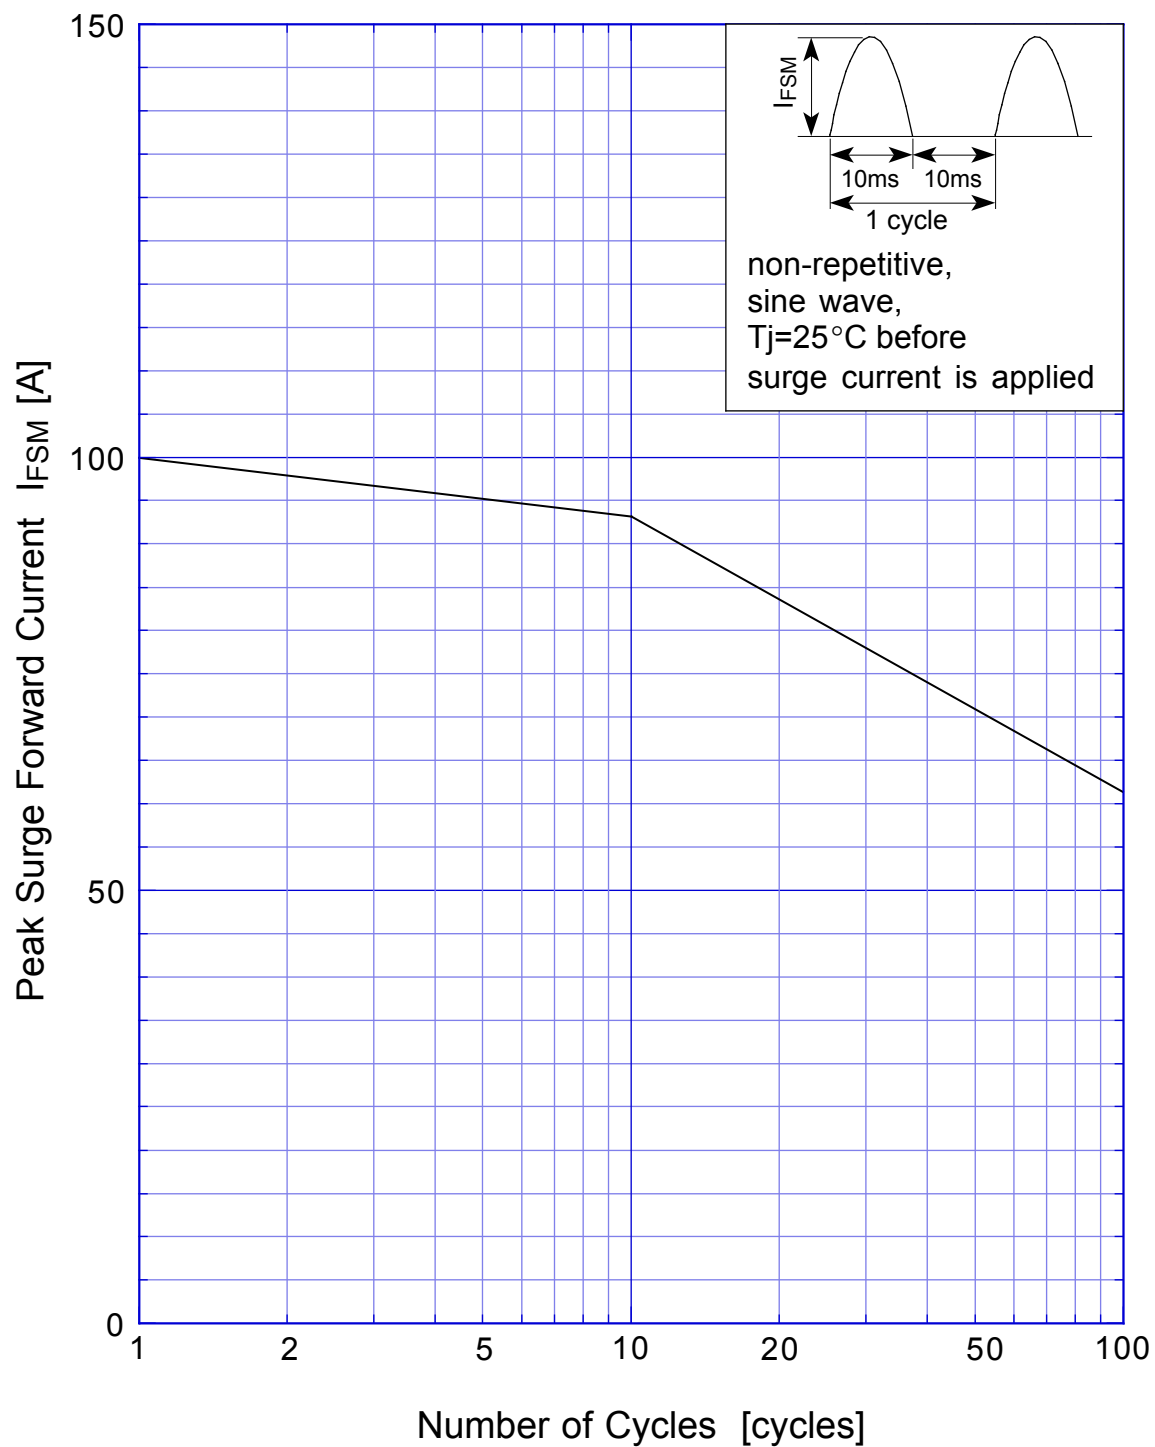


SF5L30

Derating Curve

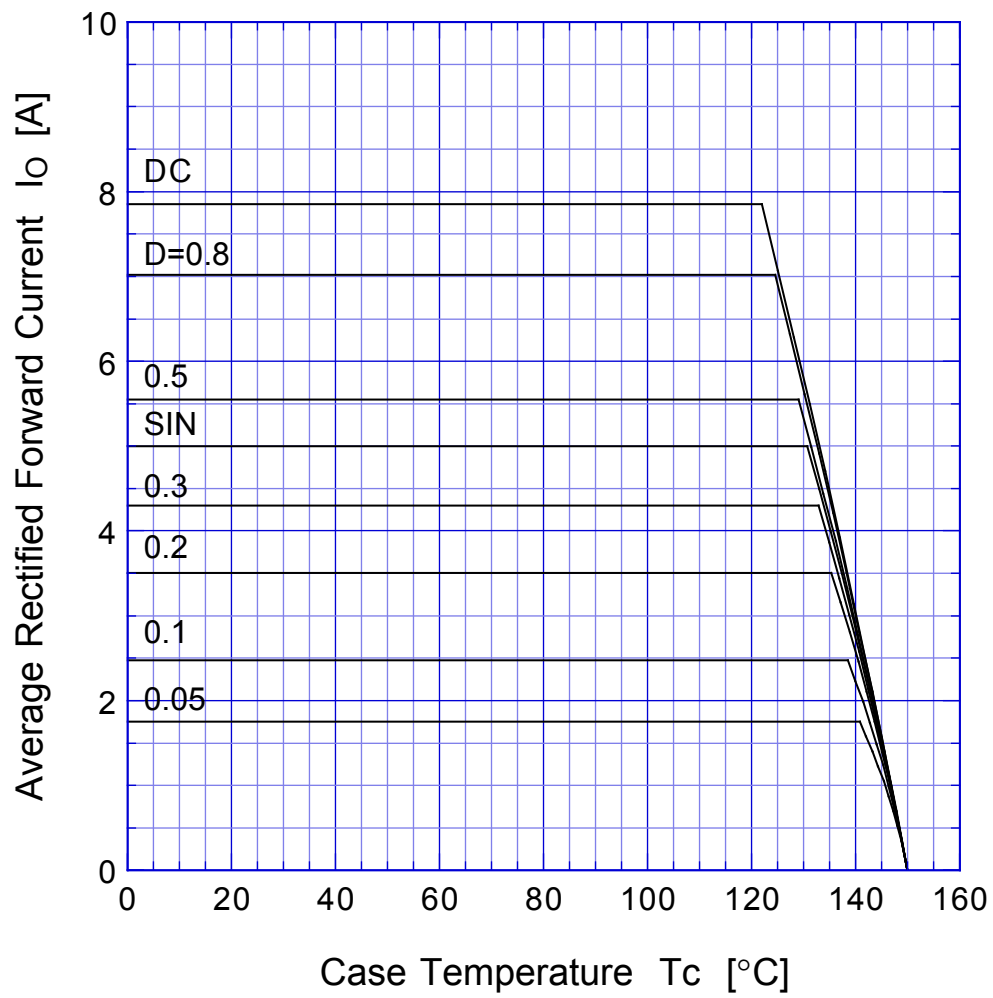

$$V_R = V_{RM}$$

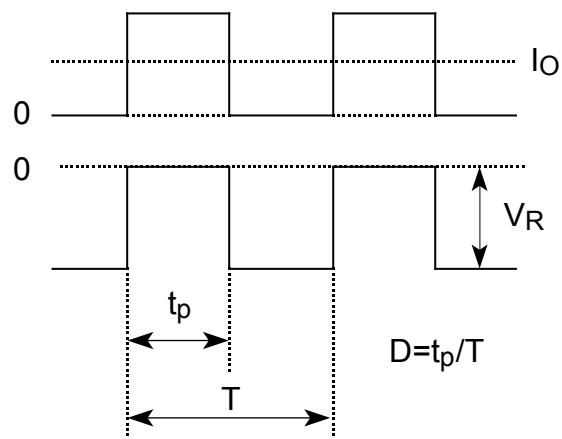

SF5L30 Junction Capacitance

