


SMT Power Inductor


SILM4018 Type

Features


- Low profile(1.8mm max. height) SMD type.
- Magnetically shielded, suitable for high density mounting.
- Self-leads ,suitable for high density mounting.
- High energy storage and low DCR.
- Provided with embossed carrier tape packing.
- Ideal for power source circuits, DC-DC converter, DC-AC inverters inductor applications.
- In addition to the standard versions shown here, custom inductors are available to meet your exact requirements.



Mechanical Dimension : Unit :mm

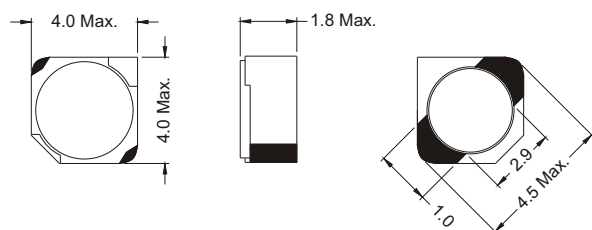


RECOMMENDED PAD



Electrical Characteristics :

PART NO.	L (uH)*	DCR (mΩ) MAX	I _{RATED} ** (A dc)
SILM4018 - 1R5	1.5	52	1.55
SILM4018 - 2R2	2.2	72	1.20
SILM4018 - 3R3	3.3	85	1.10
SILM4018 - 4R7	4.7	105	0.90
SILM4018 - 6R8	6.8	170	0.73
SILM4018 - 100	10	210	0.55
SILM4018 - 150	15	295	0.45
SILM4018 - 220	22	430	0.40
SILM4018 - 330	33	675	0.32

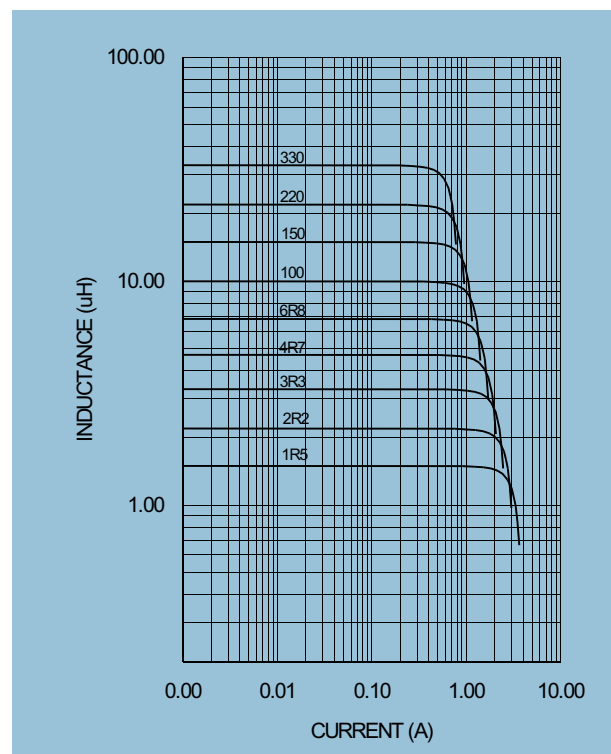

★ Tolerance of inductance
1.5~33uH±30%

★★ I_{RATED} : rated current. ΔL<35% (20% TYP.) , ΔT<45°C at I_{RATED}.

★★★ Operating temperature : -20°C to 105°C (including self-temperature rise)

★★★★ Test condition at 25°C : 100KHz, 0.1V



沙井欣旺电子有限公司

XINWANG ELECTRONICS , INC.

HTTP://WWW.XINWANGELE.COM

TEL:0755-29696626 FAX:0755-27289711

E-mail:sales@xinwangele.com