

SMT Power Inductor


SIR106 Type

Features


- Low profile (5.5mm max. Height) SMD type.
- Magnetically shielded.
- Self-leads, suitable for high density mounting.
- High energy storage and low DCR.
- Provided with embossed carrier tape packing.
- Ideal for power source circuits, DC-DC converter, DC-AC inverters inductor application.
- In addition to the standard versions shown here, custom inductors are available to meet your exact requirements.



Mechanical Dimension: Unit: mm

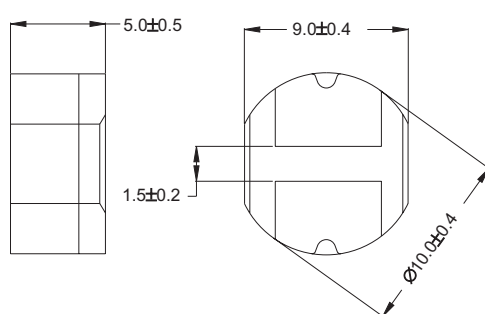


Recommended Pad



Electrical Characteristics:

PART NO.	L ★ (uH)	DCR (Ω) MAX	I _{RATED} ★ ★ (Adc)
SIR106 - 100	10	0.06	2.06
SIR106 - 120	12	0.07	1.94
SIR106 - 150	15	0.07	1.72
SIR106 - 180	18	0.08	1.58
SIR106 - 220	22	0.08	1.42
SIR106 - 270	27	0.10	1.32
SIR106 - 330	33	0.11	1.16
SIR106 - 390	39	0.12	1.10
SIR106 - 470	47	0.14	1.00
SIR106 - 560	56	0.19	0.93
SIR106 - 680	68	0.21	0.85
SIR106 - 820	82	0.28	0.79
SIR106 - 101	100	0.34	0.72
SIR106 - 121	120	0.37	0.63
SIR106 - 151	150	0.51	0.55
SIR106 - 181	180	0.57	0.50
SIR106 - 221	220	0.78	0.47
SIR106 - 271	270	0.87	0.41
SIR106 - 331	330	1.20	0.37
SIR106 - 391	390	1.34	0.35
SIR106 - 471	470	1.50	0.33

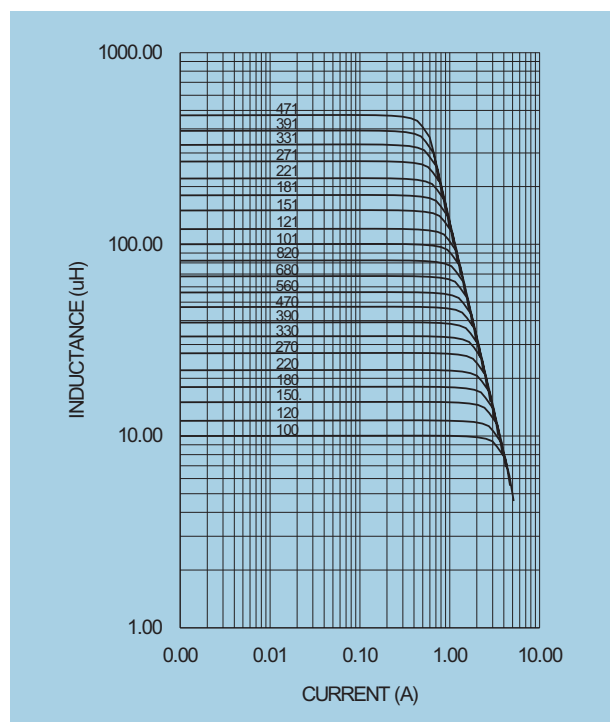

★ Tolerance of inductance

10~27uH±20% 33~82uH±15% 100~470uH±10%

★★ I_{RATED}: rated current. ΔL<10%, ΔT<45°C at I_{RATED}

★★★ Operating temperature: -20°C to 105°C (including self-temperature rise)

★★★★ Test condition at 25°C: 10~82uH 100KHz, 0.1V 100~470uH 1KHz, 1V



沙井欣旺电子有限公司

XINWANG ELECTRONICS, INC.

TEL:0755-29696626 FAX:0755-27289711

E-mail:zhangxf815@163.com