


SMT Power Inductor


SIR85 Type

Features

- Low profile (4.9mm max. height) SMD type.
- Magnetically shielded, suitable for high density mounting.
- Self-leads, suitable for high density mounting.
- High energy storage and low DCR.
- Provided with embossed carrier tape packing.
- Ideal for power source circuits, DC-DC converter, DC-AC inverters inductor applications.
- In addition to the standard versions shown here, custom inductors are available to meet your exact requirements.




Mechanical Dimension:

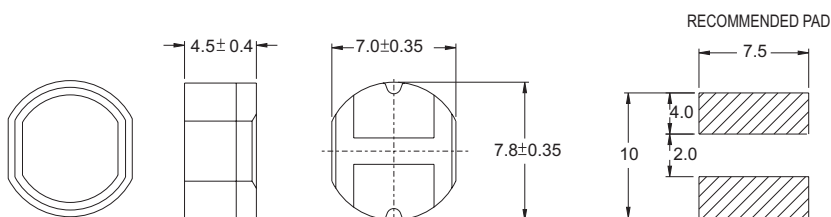

Electrical Characteristics:

PART NO.	L ★ (uH)	DCR (Ω) MAX	I _{RATED} ★ ★ (Adc)
SIR85 - 100	10	0.070	1.65
SIR85 - 120	12	0.070	1.57
SIR85 - 150	15	0.080	1.39
SIR85 - 180	18	0.100	1.29
SIR85 - 220	22	0.130	1.12
SIR85 - 270	27	0.160	1.06
SIR85 - 330	33	0.180	0.97
SIR85 - 390	39	0.180	0.91
SIR85 - 470	47	0.270	0.80
SIR85 - 560	56	0.290	0.76
SIR85 - 680	68	0.330	0.68
SIR85 - 820	82	0.430	0.62
SIR85 - 101	100	0.490	0.55
SIR85 - 121	120	0.680	0.49
SIR85 - 151	150	0.940	0.44
SIR85 - 181	180	1.000	0.40
SIR85 - 221	220	1.180	0.36
SIR85 - 271	270	1.300	0.33

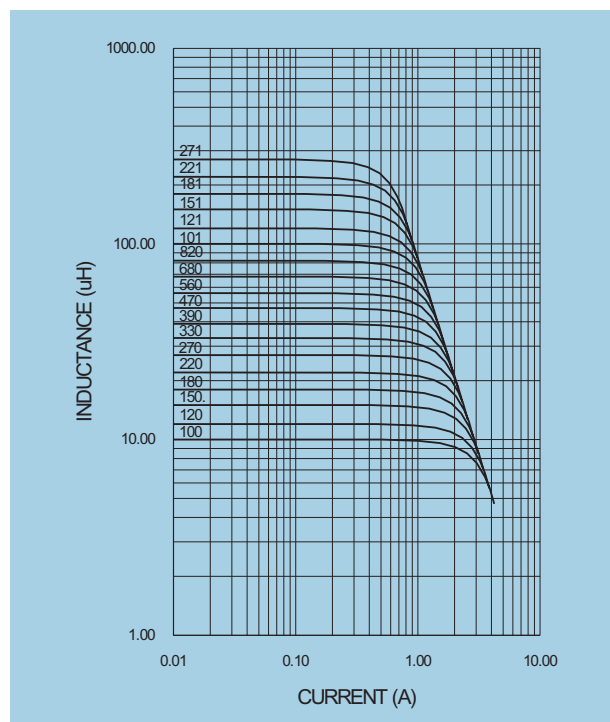

★ Tolerance of inductance

10~27uH±20% 33~82uH±15% 100~270uH±10%

★★ I_{RATED}: rated current. ΔL<10%, ΔT<45°C at I_{RATED}

★★★ Operating temperature: -20°C to 105°C (including self-temperature rise)

★★★★ Test condition at 25°C: 100KHz, 0.1V



沙井欣旺电子有限公司

XINWANG ELECTRONICS, INC.
TEL: 0755-29696626 FAX: 0755-27289711
E-mail: zhangxf815@163.com