

T10C series Sibod™

3 Terminal configuration, matches G.D.T. pin configuration

For Plug in Applications, fits in KRONE™ 3 Point Connector Block (5B).

FEATURES

- Glass passivated junction
- High current diverting capability, 250A
- Low capacitance, less than 200pF
- UL recognized
- Automatic reset
- Does not degrade

APPLICATION

- Bi-directional device for telephone and line card protection

ELECTRICAL CHARACTERISTICS (Tamb = +25°C)

SYMBOL	PARAMETER
V _{RM}	Stand-off Voltage
V _{BR}	Breakdown Voltage
I _H	Holding Current
V _R	Continuous Reverse Voltage.

ABSOLUTE RATINGS (limiting values) (T_j = + 25°C) L = 10mm

SYMBOL	PARAMETER	VALUE	UNIT
P	Power Dissipation on Infinite Heatsink	Tamb = 50°C	5 W
I _{pp}	Peak Pulse Current	10x1000 µsec 10/700 1.5KV 8-20 µs expo	100 125 250 A
I _{RSM}	Non Repetitive Surge Peak on-state Current	tp = 20 ms	50 A
di/dt	Critical Rate of Rise of on-state Current	Non repetitive	100 A/µS
T _{stg} T _j	Storage and Operating Junction Temperature Range	-40 to 150 150	°C °C

THERMAL RESISTANCES



SYMBOL	PARAMETER	VALUE	UNIT
R _{th(j-i)}	Junction-leads on Infinite Heatsink L = 10mm	60	°C/W

All parameters are tested using Fet Test™ Model 3600

DEVICE TYPE	V _{RM} (Volts)	I _{RM} @ V _{RM} (µA)	V _{BR} MIN @ 1mA (Volts)	V _{BO} MAX (Volts)	V _T TYP @ 1A (Volts)	I _{BO} TYP (mA)	I _H MIN (mA)
T10C80	70	1	80	120	2V	50	B or E
T10C110	100	1	110	135	2V	50	B or E
T10C140	120	1	140	170	2V	50	B or E
T10C180	170	1	180	210	4V	50	B or E
T10C220	200	1	220	265	4V	50	B or E
T10C270	240	1	270	360	4V	50	B or E



MINIMUM HOLDING CURRENTS I_H MIN

SUFFIX	I _H
B	120
E	180

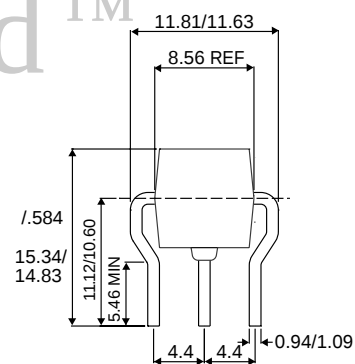


All Dimensions in mm

(WITH FAILSAFE)

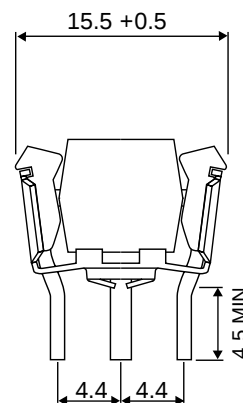

ORDERING INFORMATION



All products are sold to the commercial specifications shown, for any additional reliability testing or extended parameters, please consult the factory.

contact semitron on: telephone: +44 (0)1793 724000 fax: +44 (0)1793 720401